


LUCA 2.7" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

REV 09.09.25

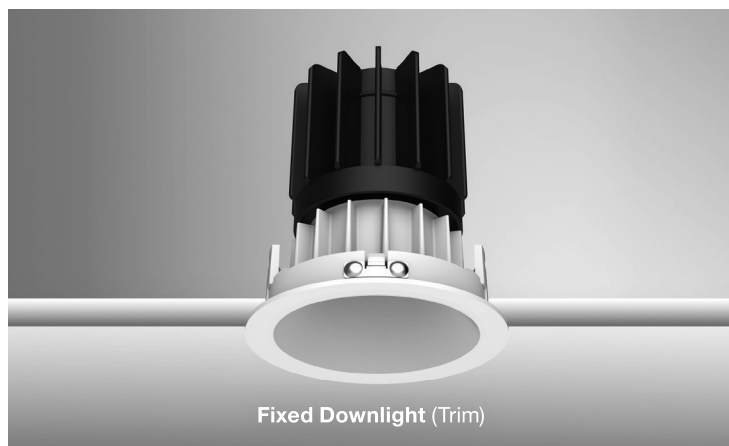

DESCRIPTION

Introducing the Luca 2.7 "The Bringer of Light" Downlight Series—a beacon of innovation in lighting technology. Designed for high-performance, these downlights are crafted to enhance hospitality, retail, commercial, and luxury residential environments. Featuring precision optics, the Luca downlights deliver a beam that reaches the very top of the wall, creating an elegant wash of light. With a Color Rendering Index (CRI) surpassing 90, these lights ensure exceptional color accuracy, making them an ideal choice for spaces where ambiance and visual clarity are paramount.

The Luca Downlight series delivers captivating illumination across a wide spectrum, creating a visually engaging experience within any space. With its extensive range of design and installation options, our Luca 2.7 Downlight is versatile for a wide array of new construction and remodel applications. Moreover, the compact form factor of the Luca 2.7 allows for installation in spaces with limited clearance.

Discover a new era of lighting performance and versatility with the Luca 2.7 Downlight Series, where superior optics, lumen performance, and outstanding color consistency converge to transform a space. For personalized quotes and expert layout assistance, share your drawings and concepts with our design team at design@PureEdgeLighting.com

SPECIFICATIONS

TRIM OPTIONS	Trim, Trimless, Round, Square for Fixed & Adjustable			DIMMING	Universal Dimming TRIAC/ELV: 100% – 3% 0-10V: 100% – 0.1% Dim to Off DALI2: 100% – 0.1% Dim to Off Pure Smart™ 100% – 5% <u>Pure Smart™</u> Wi-Fi Dimmer TRIAC/ELV 2.4GHz Wi-Fi. No Hub needed. Voice control with Goggle Assistant, Alexa, Siri,Shortcuts, and IFTTT
FINISH	Reflector: White, Black, Haze Silver (low-glare), Trims: White, Black, Custom				
ADJUSTABLE	30° Tilt, 360° Rotation				
OPTICS	10°, 15°, 25°, 35°, 45°, 55°				
WATTAGE	16W	20W	24W		
LUMENS @ 3000K, 30°	1123 Lm	1346 Lm	1507 Lm	CUT OUT SIZE	Round: Ø3", Square: 3"
EFFICACY	70 Lm/W	75 Lm/W	63 Lm/W	CEILING THICKNESS	0.5" - 1"
CCT	2400K, 2700K, 3000K, 3500K & 4000K			ENVIRONMENT	Suitable for damp locations
AVERAGE CRI	90+			CERTIFICATIONS	ETL Listed. Meets Title 24 (JA8) requirements. Down Light Trim - Wet Listed. Adjustable - Damp listed* *Glass Lens to be used in showers and similar environments
INPUT VOLTAGE	120V ELV/TRIAC, 120V-277V & 0-10V & DALI/DMX				
CONSTRUCTION	Housing: Galvanized Steel Heat Sink, Trims and Reflectors: Die-Cast Aluminum				
ACCESSORIES	Clear Glass & Soft Diffusing Film (Included) Linear Spread Glass Lens, Wide Diffused Glass Lens, Double Asymmetric Glass Lens, or Hexcell Louver			AVERAGE LIFE	50,000 Hours
				WARRANTY*	5 Years *See published warranty terms for detailed information

LUCA 2.7 STATIC WHITE															
WATTS PER FOOT	16W					20W					24W				
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K
LUMENS	966	1078	1123	1146	1168	1158	1292	1346	1373	1400	1296	1447	1507	1537	1567
LUMENS PER WATT (lm/w)	60	67	70	72	73	64	72	75	76	78	54	60	63	64	65
CRI	93	93	93	93	93	92	92	92	92	92	92	92	92	92	92

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

LUCA 2.7" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS


#1 Select LUCA 2.7 Beam, Color Temperature, Trim Options

System	Beam Spread	Color Temperature	Trim Shape	Trim Function	Reflector Finish	Trim Finish
L27	NF	27K	R	D	W	L
L27 Luca 2.7 Light Engine	VS VeryNarrow Spot 10° NS* Narrow Spot 15° SP Spot 25° NF Narrow Flood 35° FL Flood 45° WF Wide Flood 55° *NS: 16 Watt Only	24K* 2400K Very Warm White 27K 2700K Incandescent White 30K 3000K Warm White 35K 3500K Neutral White 40K 4000K Cool White *Only available in NS	R Round S Square	D Downlight A Adjustable P* Pinhole/Adjustable *Only available with black reflector and trimless or white trim	W White H Haze B Black C Custom	W White B Black L Trimless C Custom




#2 Select Housing & Driver Type

REMODEL NON-IC with 120V DRIVER

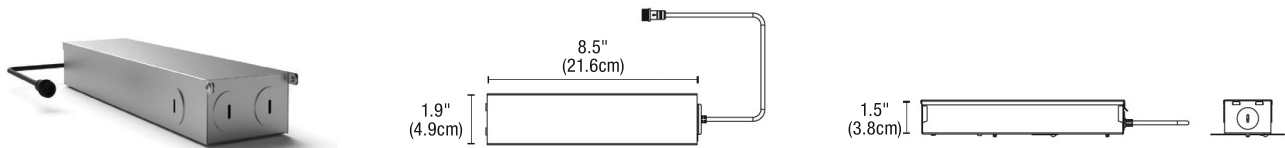


Product	Housing Type	Rating Type	Wattage/Lumens	Dimming
L27	RM	NIC	20W	UN
L27 Luca 2.7 Downlight	RM Remodel	NIC Non-Insulation Contact	16W 16 Watts/1123 Lumens 20W 20 Watts/1346 Lumens 24W 24 Watts/1507 Lumens	UN TRIAC/MLV, ELV 120V Input 01 0-10V 120V/277V Input DA DALI 2 120V/277V Input

NEW CONSTRUCTION FRAME NON-IC with 120V DRIVER

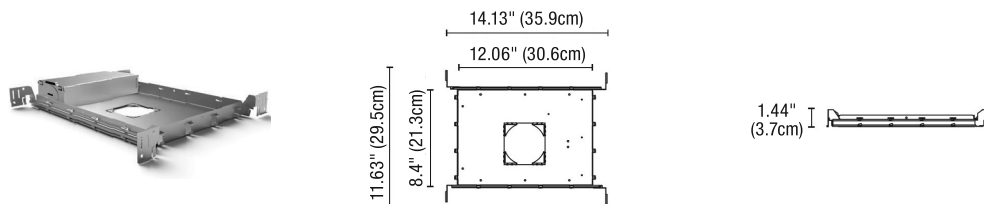

Product	Housing Type	Rating Type	Wattage/Lumens	Dimming
L27	NCF	NIC	20W	UN
L27 Luca 2.7 Downlight	NCF New Construction Frame	NIC Non-Insulation Contact	16W 16 Watts/1123 Lumens 20W 20 Watts/1346 Lumens 24W 24 Watts/1507 Lumens	UN TRIAC/MLV, ELV 120V Input 01 0-10V 120V/277V Input DA DALI 2 120V/277V Input

NEW CONSTRUCTION HOUSING IC WITH 120V DRIVER

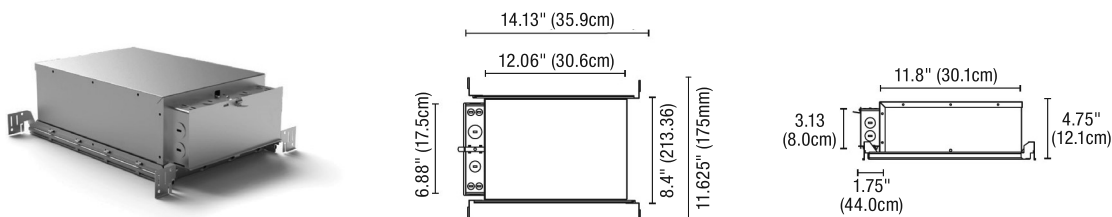

Product	Housing Type	Rating Type	Wattage/Lumens	Dimming
L27	NCH	IC	16W	UN
L27 Luca 2.7 Downlight	NCH New Construction Housing	IC Insulation Contact	16W 16 Watts/1123 Lumens	UN TRIAC/MLV, ELV 120V Input 01 0-10V 120V/277V Input DA DALI 2 120V/277V Input

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

LUCA 2.7" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS


REV 09.09.25

LUCA 2.7 WALL WASH TRIM OPTIONS


Fixed Downlight



Round Trim

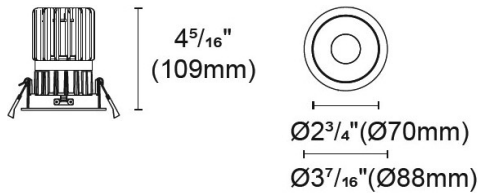


Round Trimless

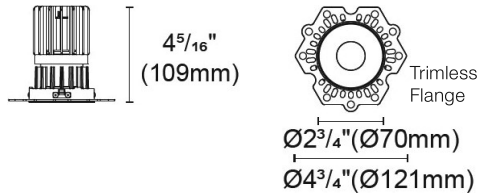

Adjustable Downlight




Round Trim

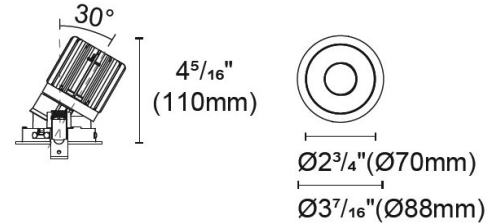

Round Trim Pinhole




Round Trimless

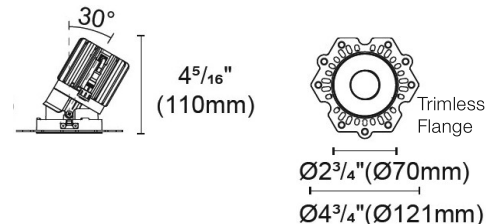


Round Trimless Pinhole





Square Trim

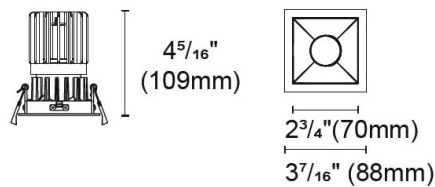


Square Trim




Square Trim Pinhole




Square Trimless

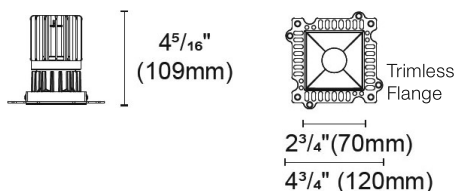

Square Trimless



Square Trimless Pinhole



PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

LUCA 2.7" STATIC WHITE 120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

LUCA 2.7 TRIM & REFLECTOR OPTIONS

ROUND TRIM

Black Trim


White Trim



Black Reflector



White Reflector



Haze Reflector



Pinhole Trim

SQUARE TRIM

Black Trim

White Trim



Black Reflector



White Reflector



Haze Reflector



Pinhole Trim

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



LUCA 2.7" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

BEAM SPREAD & LENSES

LOW GLARE REFLECTOR

Designed with a 30 degree cut-off angle, the Luca provides high output and efficiency while maximizing visual comfort.

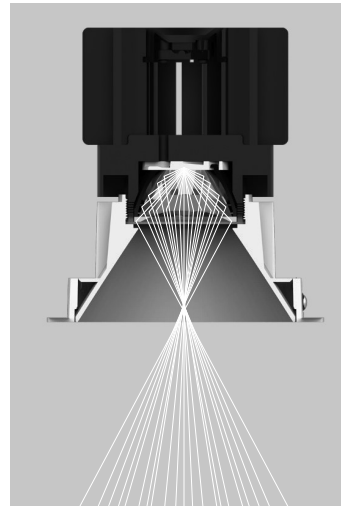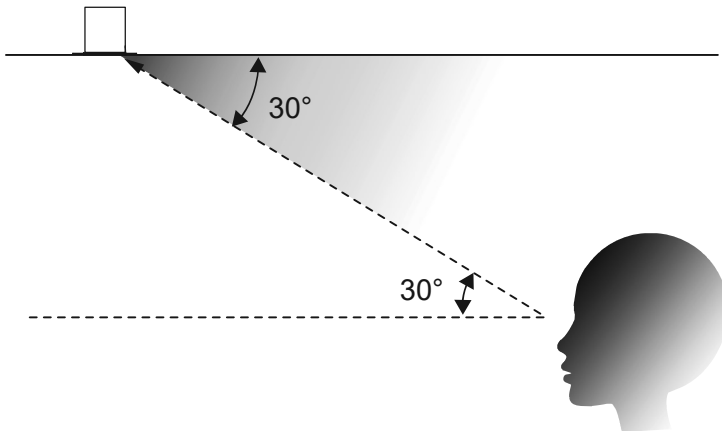


OPTICS

Our Luca Downlight has been meticulously designed to deliver exceptional performance and visual comfort. With its deep baffle design and a 30° cut-off, it effectively minimizes glare while providing a consistent and high-quality distribution of white light.

Our Adjustable Downlight features a 30° tilt for precise aiming and control.

SELECT UP TO TWO ACCESSORIES

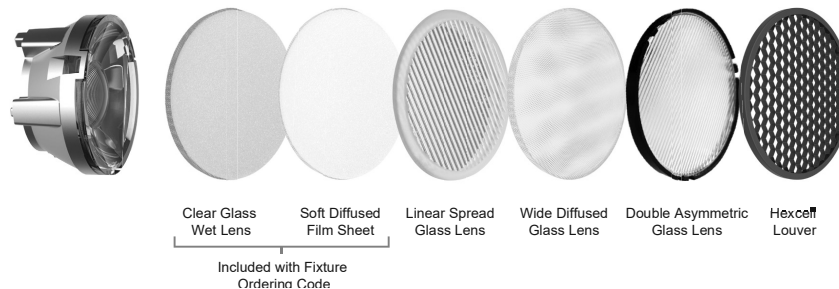

In addition to the included glass wet Lens and soft diffusion film we offer a variety of beam spreads, and lens accessories to tailor the output and beam shape for specific applications. The Linear spread lens glass produces an elliptical illumination pattern, while the Wide diffused glass lens evenly distribute the light. The Double Asymmetric Glass Lens splits the light beam evenly into two opposing directions, creating two elliptical illumination patterns. Additionally, the Hexcell Louver is available for enhanced glare control.

REPLACEMENT OPTICS

Product	Type	Beam Spread*	Color Temperature
LEN	L2.7	NF	SW
LEN Lens	L2.7 Luca 2.7	SP Spot 25° NF Narrow Flood 35° FL Flood 45°	SW Static White

*Restrictions: NS & WF not available for replacement optics

Accessories (up to 2)

Product	Type
GL13	L
GL13 Glass 1 5/8" (40mm) Diameter	C Clear Glass Wet Lens L Linear Spread Glass Lens W Wide Diffuse Glass Lens DAL Double Asymmetric Glass Lens
LF13 Lens Film 1 5/8" (40mm) Diameter	S Soft Diffusion Film
L013 Louver 1 5/8" (40mm) Diameter	H Hexcell Louver

LUCA 2.7" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS



REV 09.09.25

LUCA 2.7 FOOT CANDLE DISTRIBUTION (CONTINUED)



D - Distance From Luca fixture, FC - Initial foot candles at the center of beam, DIA - Diameter

16W at 3000K



NARROW SPOT 15°





SPOT 25°

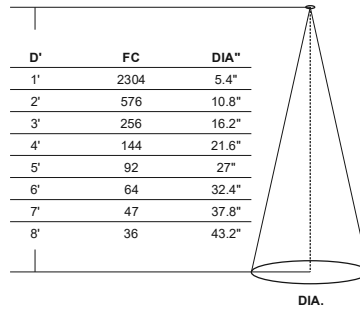



NARROW FLOOD 30°

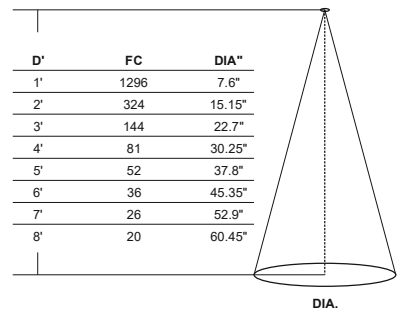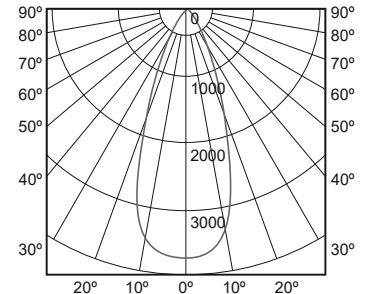

FLOOD 40°

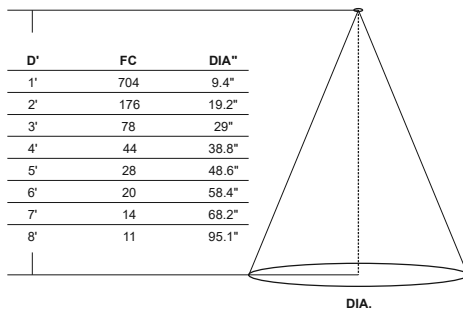

WIDE FLOOD 55°

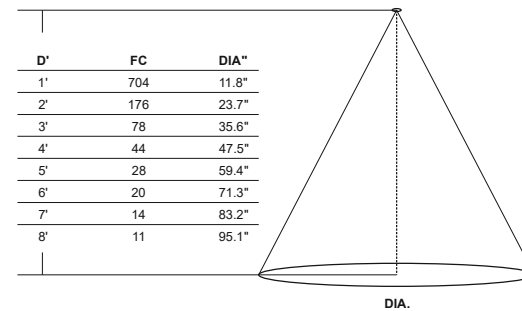

LUCA 2.7" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS



REV 09.09.25

LUCA 2.7 FOOT CANDLE DISTRIBUTION (CONTINUED)



D - Distance From Luca fixture, FC - Initial foot candles at the center of beam, DIA - Diameter

20W at 3000K



SPOT
25°

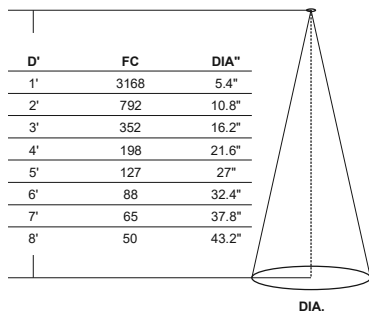



NARROW FLOOD
35°

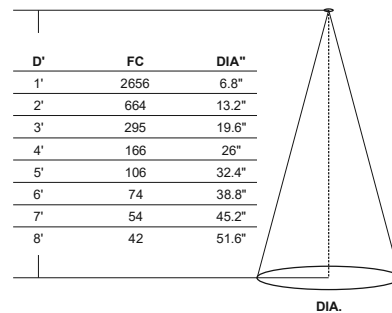

FLOOD
45°

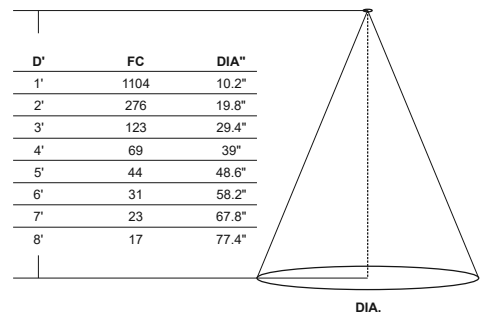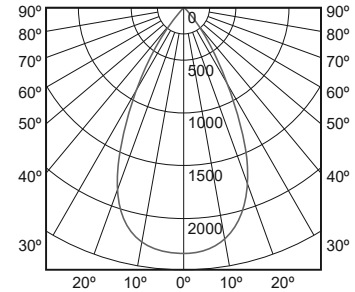

WIDE FLOOD
55°

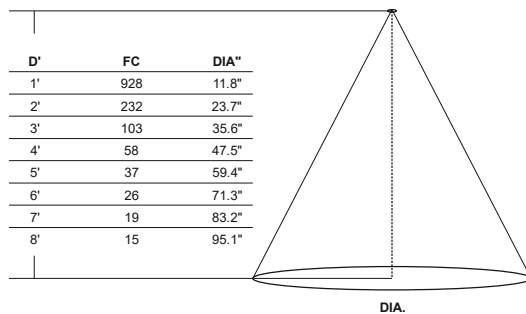

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

LUCA 2.7" STATIC WHITE


120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

LUCA 2.7 FOOT CANDLE DISTRIBUTION (CONTINUED)

D - Distance From Luca fixture, **FC** - Initial foot candles at the center of beam, **DIA** - Diameter

24W at 3000K


SPOT 25°



D'	FC	DIA"
1'	3803	5.4"
2'	951	10.8"
3'	423	16.2"
4'	238	21.6"
5'	152	27"
6'	106	32.4"
7'	78	37.8"
8'	59	43.2"

DIA.


NARROW FLOOD 35°



D'	FC	DIA"
1'	3188	6.8"
2'	797	13.2"
3'	354	19.6"
4'	199	26"
5'	128	32.4"
6'	89	38.8"
7'	65	45.2"
8'	50	51.6"

DIA.


FLOOD 45°

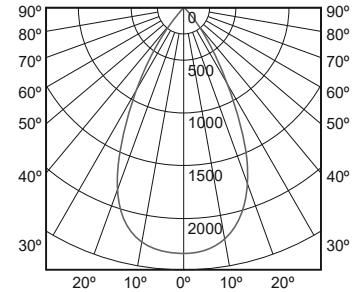

D'	FC	DIA"
1'	1325	10.2"
2'	331	19.8"
3'	147	29.4"
4'	83	39"
5'	53	48.6"
6'	37	58.2"
7'	27	67.8"
8'	21	77.4"

DIA.

WIDE FLOOD 55°



D'	FC	DIA"
1'	1114	11.8"
2'	279	23.7"
3'	124	35.6"
4'	70	47.5"
5'	45	59.4"
6'	31	71.3"
7'	23	83.2"
8'	17	95.1"

DIA.

LUCA 2.7" STATIC WHITE



120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

LUCA 2.7 FOOT CANDLE DISTRIBUTION (CONTINUED)



D - Distance From Luca fixture, FC - Initial foot candles at the center of beam, DIA - Diameter

26W at 3000K



SPOT
25°

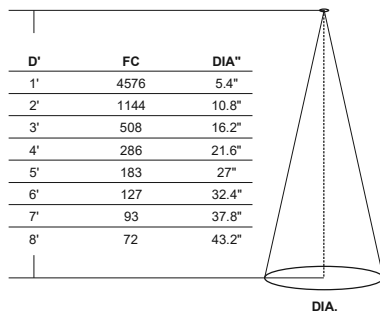



NARROW FLOOD
35°

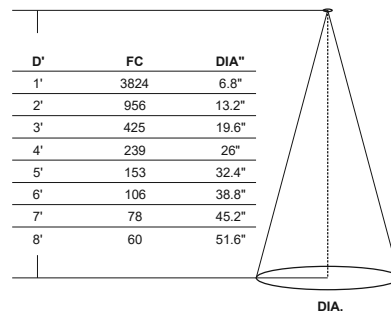

FLOOD
45°

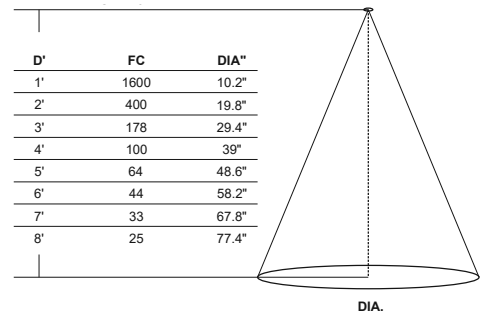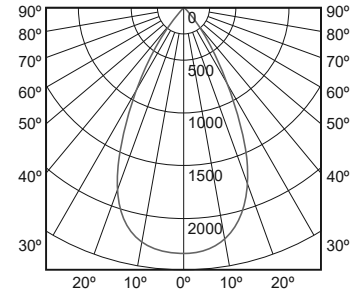


WIDE FLOOD
55°

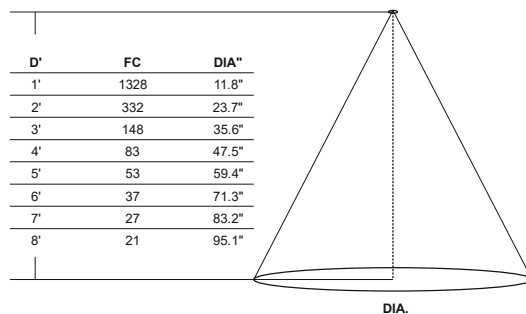


LUCA 2.7" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

TRIAC / FORWARD PHASE / LEADING EDGE DIMMING (TRI)
 Input 120VAC 50/60Hz
 Range 3% - 100%

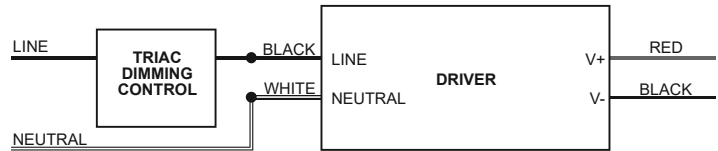


ELV / REVERSE PHASE / TRAILING EDGE DIMMING (TRI)
 Input 120VAC 50/60Hz
 Range 3% - 100%

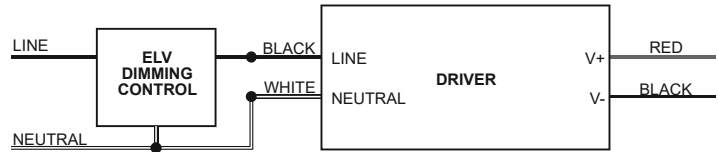


0-10V DIMMING (010)
 Input 120VAC-277VAC 50/60Hz
 Range 0.1% - 100% Dim to Off

NOTE
 Cap off unused wires individually.
 DO NOT cap together.

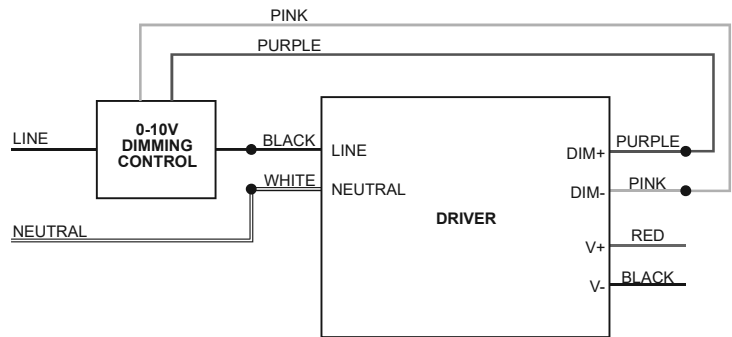

DALI DIMMING (DAL)
 Input 120VAC-277VAC 50/60Hz
 Range 0.1% - 100% Dim to Off

NOTE
 Cap off unused wires individually.
 DO NOT cap together.

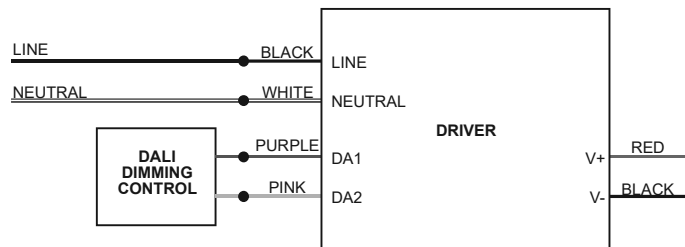


LUCA 2.7" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

TM-30-15 DATA

2400K | Rf: 91.2 | Rg: 96.8

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.0	-2.4%	1.5%
2	94.7	-2.1%	0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89.0	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%