


# CIRRUS SUSPENSION D1

## DOWNLIGHT WITH POWER, CENTER FEED

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 01.11.21

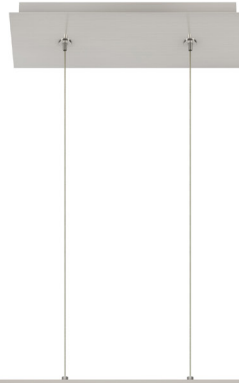


### DESCRIPTION

Cirrus Power Suspension Downlight is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 36" - 120" (10"), with a 100° White Diffused Lens or 60° Clear Frosted Lens, optional Black or White Louver, a variety of finishes, Warm Dim options, and an optional Fast Jack 12V Port (**C1**) for mounting Fast Jack 12V fixtures. Fixture includes a 5 year pro-rated warranty. For custom designs and quotes, send drawings to [design@PureEdgeLighting.com](mailto:design@PureEdgeLighting.com).

### INSTALLATION

- Includes Canopy with 120V/24VDC Uni-drivers
- A 12" Rectangle Canopy used for sizes 36" - 96", or a 24" Rectangle is used for sizes 99" - 120"
- Optional Fast Jack 12V Port (**C1**) for mounting Fast Jack 12V fixtures
- Includes adjustable 12' Coaxial Cables (additional Aircraft Cables included for support when fixture exceeds 72")

### FINISHES

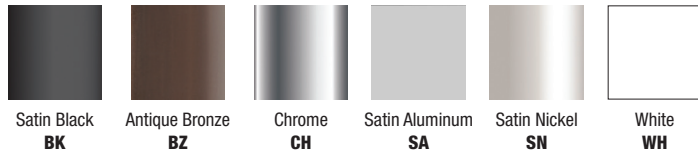

### LENSES

Diffused White 100° Lens or Clear Frosted 60° Lens, both offered with Black or White Louver

### APPLICATIONS

Designed for indoor use only. Ideal environments include: Kitchens, Dining Rooms, Hallways, Conference Rooms, Offices, Architectural, and Retail

### LAMPING

- Choose from 9 different Color Temperatures from 2200K-5700K including Warm Dim
- Warm Dim (optional): 2700K-2000K (**27D**) or 3000K-2000K (**30D**)
- 50,000 Hour Lamp Life

### POWER SUPPLY (INCLUDED IN CANOPY)


- Universal Power Supply
- Power: 120V/24V Uni-Drivers
- Optional C1 Fast Jack Port input 120V, output 12VAC electronic low voltage power supply

### DIMMER (SOLD SEPARATELY)


- ELV (Electronic Low Voltage)
- Triac (Magnetic)
- 0-10V

### APPROVALS

- Class 2 Wiring up to 100 watts, Damp Location Suitable, ETL listed. Title 24, Made in America.



CHANNEL WITHOUT LOUVER (ACTUAL SIZE)



CHANNEL WITH LOUVER (ACTUAL SIZE)

System	Wattage Per Foot	Canopy	Nominal Size (Inches)	Color Temperature	Finish
<b>CSDSP</b>	<b>2W</b>	<b>C</b>	<b>120</b>	<b>22K</b>	<b>SN</b>
<b>CSDSP</b> Cirrus Suspension Diffused Lens, Standard Efficiency, Power	<b>2W</b> 2.5 Watts*	<b>C</b> Center Feed	<b>36-120</b> Order in various increments from 36"-120"	<b>22K</b> 2200K Candle White	<b>BK</b> Satin Black
<b>CSDHP</b> Cirrus Suspension Diffused Lens, High Efficiency, Power	<b>5W</b> 4.4 Watts	<b>C1</b> Center Feed with Fast Jack Port		<b>24K</b> 2400K Very Warm White	<b>BZ</b> Antique Bronze
<b>CSDWP</b> Cirrus Suspension Diffused Lens with White Louver, Power	<b>7W</b> 7.5 Watts			<b>27K</b> 2700K Incandescent White	<b>CH</b> Chrome
<b>CSDBP</b> Cirrus Suspension Diffused Lens with Black Louver, Power	<b>10W</b> 9.6 Watts			<b>27D</b> 2700K Warm Dim (5W only)	<b>SA</b> Satin Aluminum
<b>CSCWP</b> Cirrus Suspension Clear Frosted Lens with White Louver, Power				<b>30K</b> 3000K Warm White (Halogen)	<b>SN</b> Satin Nickel
<b>CSCBP</b> Cirrus Suspension Clear Frosted Lens with Black Louver, Power				<b>30D</b> 3000K Warm Dim (5W only)	<b>WH</b> White
				<b>35K</b> 3500K Neutral White	<b>BB</b> Satin Brass with Black Canopy & End Caps
				<b>40K</b> 4000K Cool White	<b>BW</b> Satin Brass with White Canopy & End Caps
				<b>57K</b> 5700K Daylight White	

\*Louver not available

\*84" Maximum Length for Chrome. Refer to length chart for exact dimensions

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

# CIRRUS SUSPENSION D1

## DOWNLIGHT WITH POWER, CENTER FEED

### LAMP DATA Lamp Data for Cirrus Suspension D1

CSDSP																														
STANDARD EFFICIENCY, 100° DIFFUSED WHITE LENS WITHOUT LOUVER																														
DESCRIPTION	2W (2.5 watts)							5W (4.4 watts)							7W (7.3 watts)							10W (9.6 watts)								
WATTS PER FOOT																														
COLOR TEMPERATURE	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K
LUMENS PER FOOT (lm/ft)	131	145	159	174	200	217	231	226	251	275	341	301	341	345	375	399	369	409	450	492	563	612	652	478	531	583	637	730	794	845
LUMENS PER WATT (lm/w)	52	58	64	70	80	87	92	51	57	62	71	68	71	78	85	90	51	56	62	68	77	84	89	50	55	60	66	76	83	88
CRI	85+	90+	95+	95+	85+	85+	85+	85+	90+	95+	93+	95+	92+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+

CSDHP																														
HIGH EFFICIENCY, 100° DIFFUSED WHITE LENS WITHOUT LOUVER																														
DESCRIPTION	2W (2.5 watts)							5W (4.4 watts)							7W (7.3 watts)							10W (9.6 watts)								
WATTS PER FOOT																														
COLOR TEMPERATURE	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K
LUMENS PER FOOT (lm/ft)	157	174	191	209	240	260	277	271	301	330	409	361	409	413	450	474	443	491	540	590	676	735	782	652	717	770	857	953	1013	
LUMENS PER WATT (lm/w)	63	69	76	84	96	104	111	62	68	75	85	82	85	94	102	108	61	67	74	81	93	100	107	60	66	73	80	91	99	106
CRI	85+	90+	95+	95+	85+	85+	85+	85+	90+	95+	93+	95+	92+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+


CSDWP																														
100° DIFFUSED WHITE LENS WITH WHITE LOUVER																														
DESCRIPTION	2W (2.5 watts)							5W (4.4 watts)							7W (7.3 watts)							10W (9.6 watts)								
WATTS PER FOOT																														
COLOR TEMPERATURE	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K
LUMENS PER FOOT (lm/ft)	103	114	126	138	158	171	182	178	198	217	269	237	269	272	296	314	291	323	355	388	444	483	514	377	419	460	503	576	626	666
LUMENS PER WATT (lm/w)	41	46	50	55	63	69	73	40	45	49	56	54	56	62	67	71	40	44	49	53	61	66	70	39	43	48	52	60	65	69
CRI	85+	90+	95+	95+	85+	85+	85+	85+	90+	95+	93+	95+	92+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+

CSDBP																														
100° DIFFUSED WHITE LENS WITH BLACK LOUVER																														
DESCRIPTION	2W (2.5 watts)							5W (4.4 watts)							7W (7.3 watts)							10W (9.6 watts)								
WATTS PER FOOT																														
COLOR TEMPERATURE	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K
LUMENS PER FOOT (lm/ft)	81	89	98	108	123	134	143	139	155	170	210	185	210	212	231	246	227	252	278	303	347	378	402	295	327	360	393	450	490	521
LUMENS PER WATT (lm/w)	32	36	39	43	49	54	57	32	35	38	44	42	44	48	52	56	31	35	38	42	48	52	55	31	34	37	41	47	51	54
CRI	85+	90+	95+	95+	85+	85+	85+	85+	90+	95+	93+	95+	92+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+


CSCWP																														
60° CLEAR FROSTED LENS WITH WHITE LOUVER																														
DESCRIPTION	2W (2.5 watts)							5W (4.4 watts)							7W (7.3 watts)							10W (9.6 watts)								
WATTS PER FOOT																														
COLOR TEMPERATURE	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K
LUMENS PER FOOT (lm/ft)	114	126	139	152	174	189	201	196	218	240	297	262	297	300	326	347	321	356	392	428	490	533	567	416	462	508	555	635	691	735
LUMENS PER WATT (lm/w)	46	50	55	61	70	76	80	45	49	54	62	59	62	68	74	78	44	49	54	59	67	73	78	43	48	53	58	66	72	77
CRI	85+	90+	95+	95+	85+	85+	85+	85+	90+	95+	93+	95+	92+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+

CSCBP																														
60° CLEAR FROSTED LENS WITH BLACK LOUVER																														
DESCRIPTION	2W (2.5 watts)							5W (4.4 watts)							7W (7.3 watts)							10W (9.6 watts)								
WATTS PER FOOT																														
COLOR TEMPERATURE	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K
LUMENS PER FOOT (lm/ft)	90	99	109	120	137	149	158	155	172	189	234	206	234	236	257	273	253	280	309	337	386	420	447	327	364	400	437	500	544	579
LUMENS PER WATT (lm/w)	36	40	44	48	55	60	63	35	39	43	49	47	49	54	58	62	35	38	42	46	53	57	61	34	38	41	46	52	57	60
CRI	85+	90+	95+	95+	85+	85+	85+	85+	90+	95+	93+	95+	92+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+


\*27D, 30D - Warm Dim (4.8 Watts)

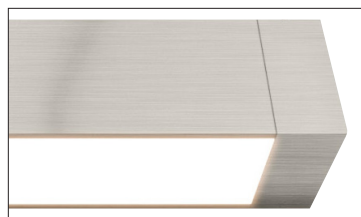

DIFFUSED WHITE LENS

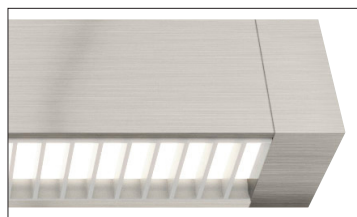

DIFFUSED WHITE LENS WITH WHITE LOUVER

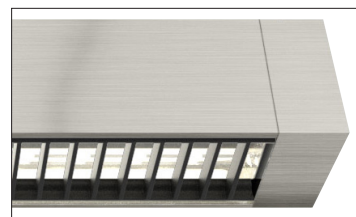

CLEAR FROSTED LENS WITH BLACK LOUVER



C1 CANOPY, SHOWN WITH FJ PISTON IN SATIN NICKEL (FJ PISTON SOLD SEPARATELY)

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# CIRRUS SUSPENSION D1

## DOWNLIGHT WITH POWER, CENTER FEED

REV 01.11.21


8', 3000K

2 Watt 100°	
Distance	Foot Candles
1'	76
1.5'	49
2'	36
3'	23
4'	16
5'	12
6'	9
7'	7
8'	5


5 Watt 100°	
Distance	Foot Candles
1'	122
1.5'	80
2'	59
3'	38
4'	27
5'	20
6'	15
7'	12
8'	10

7 Watt 100°	
Distance	Foot Candles
1'	200
1.5'	131
2'	96
3'	62
4'	45
5'	33
6'	26
7'	21
8'	18


10 Watt 100°	
Distance	Foot Candles
1'	227
1.5'	148
2'	110
3'	71
4'	51
5'	38
6'	30
7'	23
8'	18

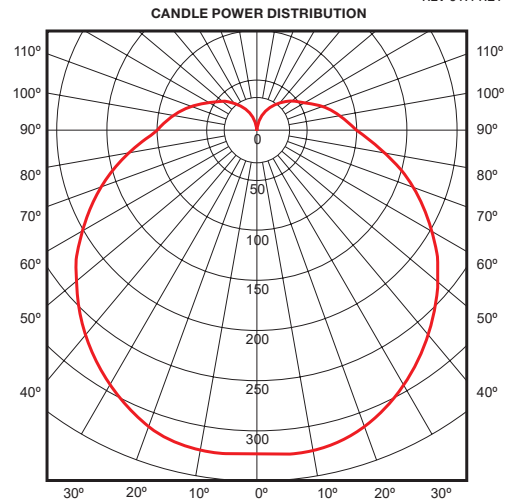

100° BEAM SPREAD

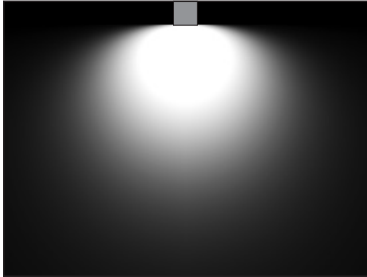

**DRAWINGS** Dimension drawings for Cirrus Suspension D1

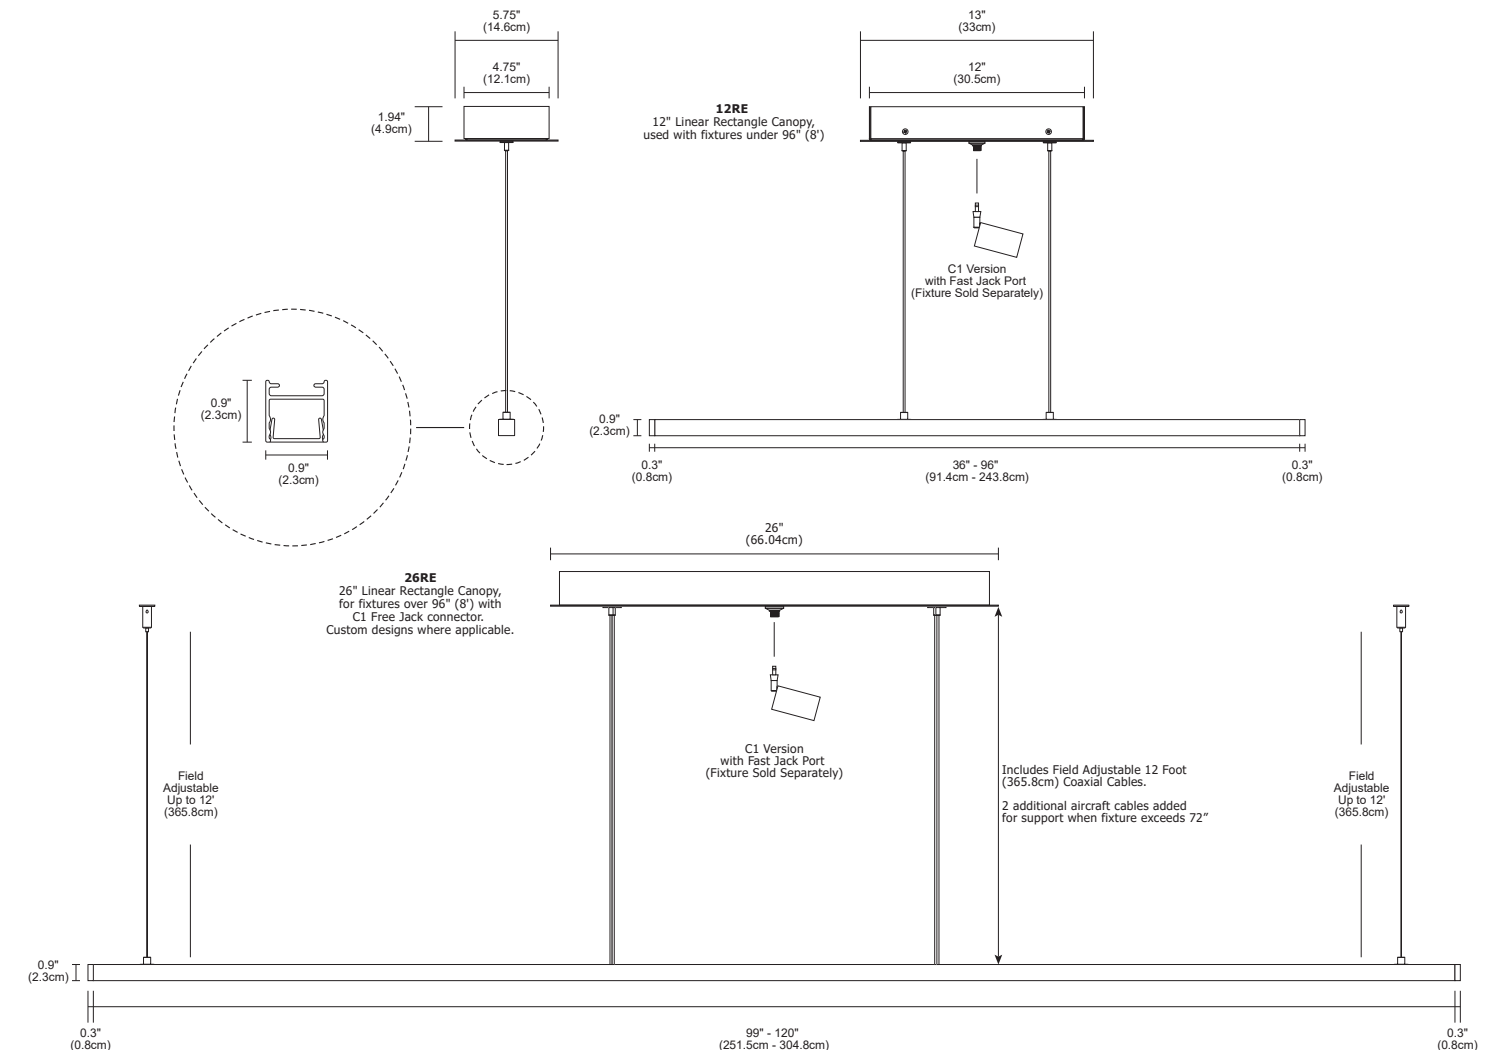

Additional adjustable cables will be required for fixtures longer than 72".

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

# CIRRUS SUSPENSION D1

## DOWNLIGHT WITH POWER, CENTER FEED

### LENGTH CHART Actual lengths for Cirrus Suspension D1

22K, 24K, 27K, 30K, 35K, 40K & 57K		
Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)
36	37.0	37.0
39	39.4	39.4
41	41.8	41.8
44	44.2	44.2
46	46.6	46.6
48	49.0	49.0
51	51.4	51.4
53	53.8	53.8
56	56.2	56.2
58	58.6	58.6
60	61.0	61.0
63	63.4	63.4
65	65.8	65.8
68	68.2	68.2
70	70.6	70.6
72	73.0	73.0
75	75.4	75.4
77	77.8	77.8
80	80.2	80.2
82	82.6	82.6
84	85.0	85.0
87	87.4	
89	89.8	
92	92.2	
94	94.6	
96	97.0	
99	99.4	
101	101.8	
104	104.2	
106	106.6	
108	109.0	
111	111.4	
113	113.8	
116	116.2	
118	118.6	
120	121.0	

27D & 30D		
Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)
36	37	37
39	40	40
42	43	43
45	46	46
48	49	49
51	52	52
54	55	55
57	58	58
60	61	61
63	64	64
66	67	67
69	70	70
72	73	73
75	76	76
78	79	79
81	82	82
84	85	85
87	88	
90	91	
93	94	
96	97	
99	100	
102	103	
105	106	
108	109	
111	112	
114	115	
117	118	
120	121	

\*84" max shipping length for chrome.


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# CIRRUS SUSPENSION D1

## DOWNLIGHT WITH POWER, CENTER FEED

### WIRING DIAGRAM Wiring Diagram for Static White with ELV Dimmer

**APPLICATION** ELV or Triac dimming for Cirrus Power Suspension, Center Feed Canopy with Fast Jack (C1), Static White

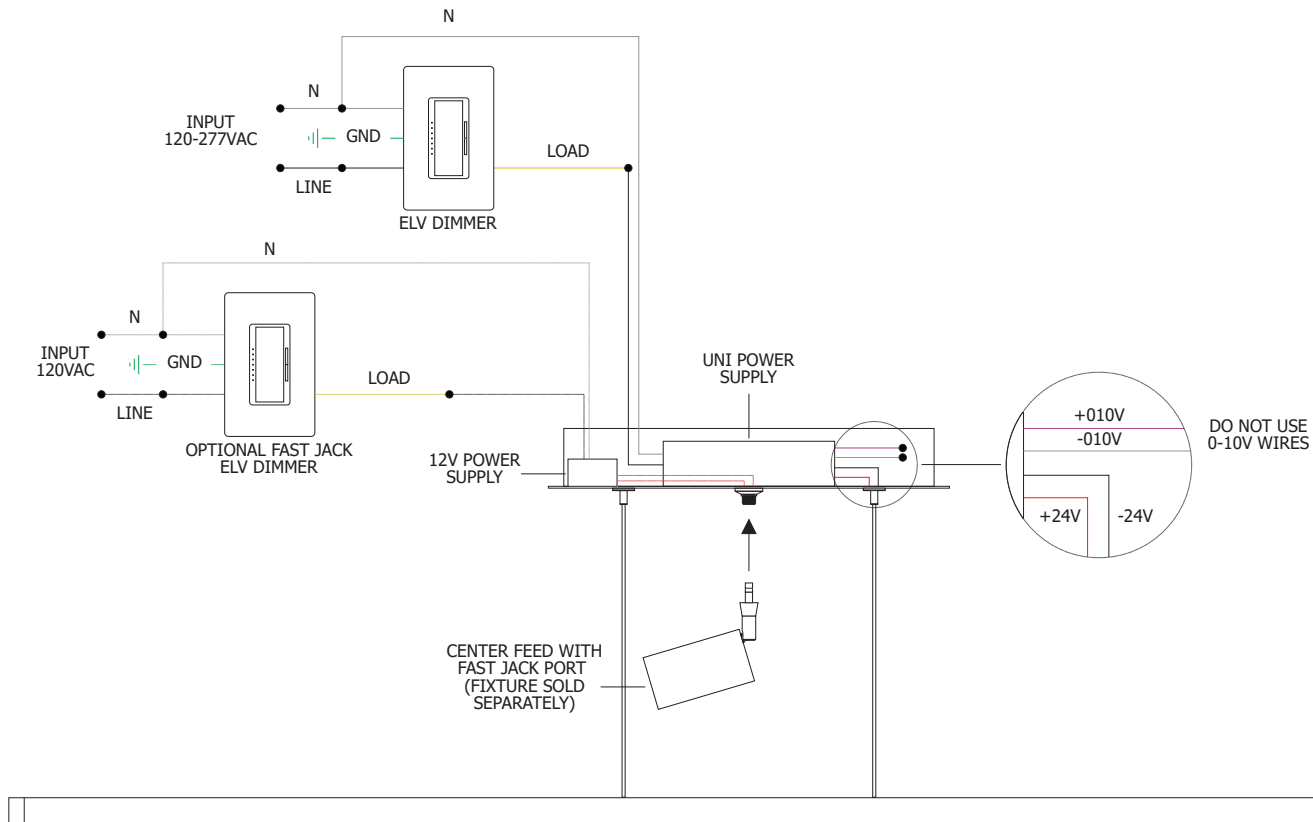

PROJECT	Remote Power Supply in J-box	FIXTURE TYPE	DATE
---------	------------------------------	--------------	------

# CIRRUS SUSPENSION D1

## DOWNLIGHT WITH POWER, CENTER FEED



**FJ-SCO-1-PN**  
Fast Jack Scope LED  
9W, 315 lumens 3000K  
(adjustable beam spread  
from 20°-50°)  
Fixture Finishes: SN, PN, BZ, WH



**FJ-PST-SP-1-30K-SN**  
Fast Jack Piston  
9W, 650 lumens  
SP 15°, NF 25°, FL 35°  
& WF 45° Beam Spreads  
Fixture Finishes: SN, WH




**FJ-FOR-SQ-3-PN**  
**FJ-FOR-RD-3-PN**  
Fast Jack Form Round or Square  
Fixture Finishes: SN, PN



**FJ-FOR-2RD-3-SN**  
**FJ-FOR-2SQ-3-SN**  
Fast Jack Form  
Round or Square 2-Head  
Fixture Finishes: SN, PN



**FJ-REB-1-PN**  
Fast Jack Rebel  
Fixture Finishes: SN, PN, BZ, WH



**FJ-CHO-1-SN**  
Fast Jack Chopper with LED  
Fixture Finishes: SN, PN, BZ



**FJ-SPI-3-PN with S1-PN**  
Fast Jack Spirit, S1 Shade  
Fixture Finishes: SN, PN, BZ  
S1 Shade Finishes: SN, PN, BZ, BK



**FJ-LOW-1-SN with S1-SN**  
Fast Jack Low Rider, S1 Shade  
Fixture Finishes: SN, PN, BZ  
S1 Shade Finishes: SN, PN, BZ, BK

### FAST JACK FIXTURE & SHADE FINISHES

<b>SN</b>	Satin Nickel	<b>PN</b>	Polished Nickel	<b>BZ</b>	Antique Bronze	<b>WH</b>	White	<b>BK</b>	Black
-----------	--------------	-----------	-----------------	-----------	----------------	-----------	-------	-----------	-------

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# 12VAC LED MR16

REV 01.11.21

## SOL LIGHT WARM DIM

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	MR16-12V-8W-NF-27KWD-SL	8	97+	85	24	30,000	2700K dims to 1800K	390	50	12V	Title 24 Compliant, low flicker <1% CE, UL, NOM	50
	MR16-12V-8W-FL-27KWD-SL	8	97+	85	36	30,000	2700K dims to 1800K	427	55	12V	Title 24 Compliant, low flicker <1% CE, UL, NOM	50
	MR16-12V-8W-NF-30KWD-SL	8	97+	85	24	30,000	3000K dims to 1800K	410	53	12V	Title 24 Compliant, low flicker <1% CE, UL, NOM	50
	MR16-12V-8W-FL-30KWD-SL	8	97+	85	36	30,000	3000K dims to 1800K	450	58	12V	Title 24 Compliant, low flicker <1% CE, UL, NOM	50

## SORAA BRILLIANT HIGH LUMEN 2700K COLOR TEMPERATURE

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-827-H1*	8	90	80	10	35,000	8,000	575	77	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-25D-827-H1	8	90	80	25	35,000	3,710	600	80	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-36D-827-H1	8	90	80	36	35,000	1,550	600	80	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75

\*Use with Snap Lens

## SORAA VIVID 2700K COLOR TEMPERATURE INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10d-927-03*	8	95	95	10	35,000	5,710	390	52	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-25D-927-03	8	95	95	25	35,000	2,260	410	55	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-36D-927-03	8	95	95	36	35,000	1,070	410	55	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50

\*Use with Snap Lens

## SORAA HEALTHY

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SH-MR16-07-36D-27-01-X2	8	80	90	36	25,000	1,020	400	53	12V +/- 1.2V	UL/CUL, FCC Title 47 Part 15B, RoHS	50

## SORAA BRILLIANT HIGH LUMEN 3000K COLOR TEMPERATURE

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-830-H1*	8	90	80	10	35,000	8,400	600	80	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-25D-830-H1	8	90	80	25	35,000	3,300	630	84	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-36D-830-H1	8	90	80	36	35,000	1,650	630	84	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75

\*Use with Snap Lens

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# 12VAC LED MR16

REV 01.11.21

## SORAA VIVID 3000K COLOR TEMPERATURE MR16 INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-930-03*	8	95	95	10	35,000	6,000	410	55	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-25D-930-03	8	95	95	25	35,000	2,400	435	58	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-36D-930-03	8	95	95	36	35,000	1,130	435	58	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50

\*Use with Snap Lens

## SORAA VIVID 4000K COLOR TEMPERATURE MR16 INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-940-03*	8	95	95	10	35,000	6,290	430	57	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-25D-940-03	8	95	95	25	35,000	2,510	455	61	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-36D-940-03	8	95	95	36	35,000	1,190	455	61	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50

\*Use with Snap Lens

## SATCO 3500K COLOR TEMPERATURE MR16 INDOOR/OUTDOOR


Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	S8637	8	90+	N/A	15	25,000	6,290	430	61	12	UL/CUL, FCC Title 47 Part 15B, RoHS, Lawful for sale in California	75
	S8642	8	90+	N/A	40	25,000	2,510	455	61	12	UL/CUL, FCC Title 47 Part 15B, RoHS, Lawful for sale in California	75

8MR16/LED/40/35K/90CRI/12V 8 watt; LED MR16; 3500K; 40° beam spread; GU5.3 base; 12 volts. Features: Silver back MR16 reflector. Direct replacements for 75 watt Halogen lamps - uses only 8 watts. Dimmable. No UV or IR radiation. Approved for enclosed fixtures.

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--




**SORAA VIVID MR16 36° FL**  
**3000K** | Rf: 90.4 | Rg: 99.5  
 Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	94.4	1.0%	0.8%
2	94.6	2.1%	-1.1%
3	91.9	1.1%	-3.3%
4	91.9	2.1%	-2.1%
5	93.9	0.4%	-0.9%
6	95.2	0%	1.9%
7	93.4	2.7%	-0.7%
8	92.7	4.2%	0.1%
9	90.5	3.6%	-3.9%
10	84.3	2.3%	-9.2%
11	81.3	2.3%	-12.7%
12	81.3	-3.6%	-10.3%
13	90.5	-2.5%	-6.2%
14	88.5	-8.2%	-0.4%
15	96.2	-1.0%	0.3%
16	86.6	-5.4%	8.2%


**SOL-LIGHT WARM DIM MR16 36° FL**  
**3000K** | Rf: 94.2 | Rg: 101.2  
 Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	96.0	0.3%	0.7%
2	96.8	0.9%	-0.8%
3	95.6	0.5%	-0.8%
4	93.1	-3.2%	-2.7%
5	95.7	-2.4%	0.4%
6	96.8	0.4%	1.6%
7	92.4	-1.4%	3.5%
8	96.8	1.2%	1.2%
9	94.0	1.4%	3.1%
10	92.6	2.1%	3.9%
11	92.2	3.7%	3.9%
12	92.4	3.9%	-0.9%
13	94.7	0.9%	-3.3%
14	93.4	3.0%	-3.2%
15	93.6	-1.1%	0.9%
16	90.2	2.4%	-6.7%


**SORAA VIVID MR16 25° NFL**  
**3000K** | Rf: 94.0 | Rg: 101.0  
 Color Vector Graphic

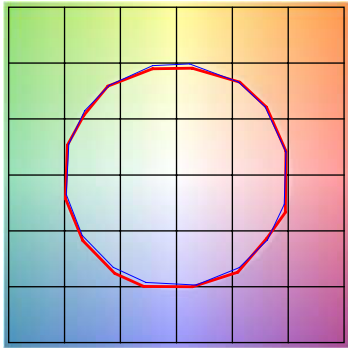

■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	95.9	0.3%	0.8%
2	96.8	0.8%	-0.9%
3	95.5	0.4%	-0.9%
4	92.7	-3.4%	-2.9%
5	95.6	-2.7%	0.4%
6	96.8	0.1%	1.6%
7	92.2	-1.6%	3.7%
8	96.6	1.1%	1.5%
9	93.7	1.4%	3.3%
10	92.4	2.2%	4.1%
11	92.2	3.8%	3.8%
12	92.4	3.9%	-1.1%
13	94.4	0.8%	-3.6%
14	93.3	2.8%	-3.4%
15	93.4	-1.4%	0.9%
16	90.3	2.2%	-6.7%

**SOL-LIGHT WARM DIM MR16 24° NFL**  
**3000K** | Rf: 94.2 | Rg: 101.2  
 Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	95.9	0.3%	0.8%
2	96.8	0.8%	-0.9%
3	95.5	0.4%	-0.9%
4	92.7	-3.4%	-2.9%
5	95.6	-2.7%	0.4%
6	96.8	0.1%	1.6%
7	92.2	-1.6%	3.7%
8	96.6	1.1%	1.5%
9	93.7	1.4%	3.3%
10	92.4	2.2%	4.1%
11	92.2	3.8%	3.8%
12	92.4	3.9%	-1.1%
13	94.4	0.8%	-3.6%
14	93.3	2.8%	-3.4%
15	93.4	-1.4%	0.9%
16	90.3	2.2%	-6.7%


PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

# SUSPENSION TM30 DATA

## DOWNLIGHT WITH POWER, CENTER FEED

**TM-30-15 DATA:** The data below is for SS2C, SS5C, SS7C, and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


**2200K** | Rf: 83.9 | Rg: 94.9  
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	78.8	-9.5%	1.3%
2	80.7	-7.8%	6.7%
3	78.2	-3.3%	9.4%
4	89.7	-2.8%	3.6%
5	93.2	-0.8%	2.6%
6	93.0	-0.6%	-0.7%
7	87.7	-5.9%	-3.5%
8	89.2	-6.8%	1.9%
9	83.4	-5.6%	6.0%
10	79.3	-3.7%	10.8%
11	81.4	2.9%	11.1%
12	84.9	5.3%	4.9%
13	88.1	4.9%	-10.1%
14	68.1	0.1%	-19.5%
15	86.0	-3.3%	-7.3%
16	76.4	-8.9%	-11.7%


**2400K** | Rf: 91.2 | Rg: 96.8  
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.0	-2.4%	1.5%
2	94.7	-2.1%	0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89.0	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%


**2700K** | Rf: 87.7 | Rg: 96.1  
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%


**3000K** | Rf: 88.1 | Rg: 99.7  
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%


**3500K** | Rf: 86.1 | Rg: 95.5  
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

**4000K** | Rf: 87.6 | Rg: 96.8  
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------


# SUSPENSION TM30 DATA

## DOWNLIGHT WITH POWER, CENTER FEED

**TM-30-15 DATA:** The data below is for SS5C and SS7C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

**5700K** | Rf: 80.3 | Rg: 91.5

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	75.4	-8.9%	4.7%
2	87.5	-2.6%	4.6%
3	90.7	-3.0%	-0.5%
4	83.2	-6.0%	-5.7%
5	76.2	-12.9%	-5.3%
6	81.4	-11.9%	-2.6%
7	74.8	-14.0%	5.1%
8	69.0	-9.0%	14.1%
9	72.6	-3.6%	22.2%
10	71.4	2.7%	16.1%
11	81.3	7.9%	5.3%
12	83.6	4.1%	-9.4%
13	78.4	0.7%	-15.3%
14	77.7	-6.2%	-11.0%
15	68.8	-1.3%	-21.2%
16	80.8	-9.6%	3.3%

**2700D** | Rf: 89.5 | Rg: 100.8

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	88.8	-5.1%	1.4%
2	89.8	-2.7%	4.1%
3	87.2	0.3%	5.9%
4	92.3	-0.9%	1.0%
5	93.3	1.5%	1.7%
6	92.4	3.6%	-0.2%
7	92.2	-0.9%	-2.4%
8	96.7	-0.4%	-1.1%
9	92.3	-1.2%	3.7%
10	88.9	-0.0%	6.1%
11	86.4	5.1%	7.4%
12	88.2	6.3%	-0.9%
13	87.2	3.8%	-8.1%
14	84.2	3.8%	-11.0%
15	89.8	-2.6%	-4.3%
16	82.7	-3.4%	-11.1%

**3000D** | Rf: 89.8 | Rg: 101.4

Color Vector Graphic



■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	90.2	-4.2%	1.5%
2	90.9	-2.0%	3.7%
3	87.9	0.8%	5.5%
4	92.1	-0.9%	0.6%
5	93.0	1.5%	1.6%
6	92.2	3.9%	-0.2%
7	92.1	-0.3%	-2.0%
8	96.7	0.0%	-1.2%
9	92.5	-0.6%	3.7%
10	88.3	1.1%	7.0%
11	87.2	4.1%	7.4%
12	87.2	6.7%	-1.0%
13	88.2	3.8%	-7.2%
14	85.3	4.3%	-9.9%
15	90.9	-2.2%	-3.6%
16	83.4	-2.2%	-11.2%

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------