


Top View

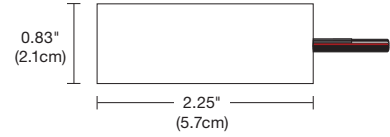

Side View

### DESCRIPTION

Compact, lightweight remote electronic 60W/24V LED Power Supply\* converts standard 120VAC voltage to 24VDC and features built-in short-circuit protection. The low voltage output may be dimmed using an electronic low voltage dimmer. The Power Supply is certified to be used inside a standard Junction Box enclosure. Power Supply features short circuit and overload protection. Indoor applications only.

\*Electrical Panels using Seimens/Murray AFCI breakers are not compatible with this ELV transformer. Use 0-10 Volt power supplies with this breaker.



\*\*ELV power supplies are not compatible with nLight, use only 0-10 volt or Uni driver power supplies

<b>POWER INPUT</b>	120 volts AC, 60Hz
<b>POWER OUTPUT</b>	Class 2; 24 volts DC 2.5A 60 watt maximum
<b>DIMENSIONS</b>	2.25" x 1.25" x 0.83"
<b>DIMMER TYPE</b>	Electronic Low Voltage Dimmer Lutron: Diva #DVELV-300P; Skylark #SELV-300P; Maestro #MAELV-600

### APPLICATIONS


#### Indoor\*

To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.

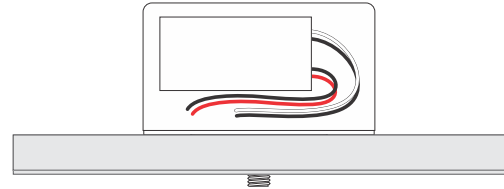

### SAMPLE WIRING DIAGRAMS 24VDC ELV

- Application:** ELV dimming for Static White
- Dimming:** Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

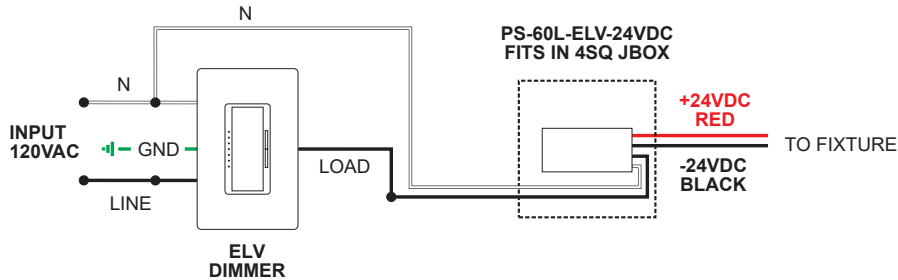

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--