


TIE STIX
WALL 2-LIGHT

DESIGNED BY GREGORY KAY | MADE IN AMERICA

REV 06.29.21

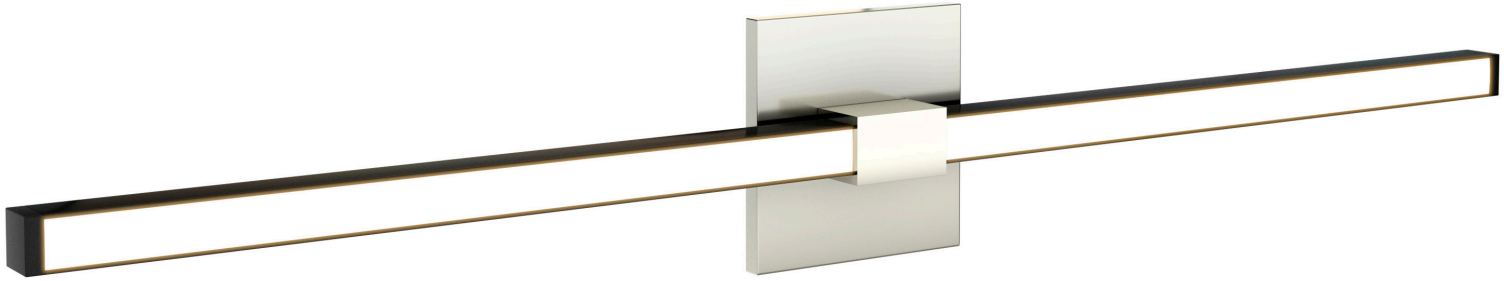

DESCRIPTION

The Tie Stick Wall 2-Light fixture features an opaque flat lens that illuminates at a 100 degree beam spread. The Tie Stix contain designer Grade 95+ CRI LEDs for excellent color rendering ranging from color temperatures of 2000K to 5700K. Warm Dim options of 2700K (**27D**) or 3000K (**30D**) that dim down to 2000K Sizes range from 15" to 70" with a variety of mounting option (see below).

ELECTRICAL:

Power Supply Options: **TXW2** - 120V24VDC; electronic low voltage power supply fits in junction box (included).
TXW2R - 120/277V- 24VDC Remote, Class 2 power supply (Sold Separately).
 Power Consumed: 5 Watts per foot
 LEDs per Foot: Static CCT = 35. Warm Dim 35 + 35 = 70
 Average LED life: 60,000 hrs @ normal usage

LUMEN PERFORMANCE

@3000K 4.4W per Foot (See Page 5)

Lumen Output: 270 Lm/Ft
 Efficiency: 54 Lm/Ft
 CRI: 95+
 Beam Angle: 120 degrees
 Beam Tolerance: +/- 30 CCT

POWER SUPPLY

120V input, 24VDC Class 2 output; electronic low voltage LED power supply (included). For Title 24 use Remote Universal Power supply.

APPROVALS

Damp Location, ETL listed, Title 24 Compliant with TXW2R ordering code with remote power supply (Order Separately) , Class 2 wiring, Made in America.

PHYSICAL ATTRIBUTES

Mounts: Horizontal or Vertical
 Mounting Options: **4SQ:** Canopy Mounts to standard 4" electrical box with round plaster plate.
2RE: Canopy Mounts to standard 4" electrical box with single gang plaster ring or single gang electrical box.
1RE: Canopy Mounts to Slim Profile junction box (included) recommend for new construction application.
 Ordering Increments: See ordering code for nominal and exact sizes.
 Max length: 70 inches (Custom Lengths Available)
 Material: Real Hardwood Channels Maple, Walnut, Cherry, White Oak, and Espresso. Aluminum Channels and Hardware are made from high grade aluminum and finished.
 Compliance: ADA, ETL, Title 24
 Warranty: PureEdge's 5 Year pro-rated Warranty is back by over 30 years of precision lighting manufacturing and design.

APPLICATIONS

Indoor Only, Damp Location - bathroom vanity, architectural lighting, task lighting, general lighting, retail

System	Wattage	Canopy	Nominal Size (L) In Inches				Color Temperature	Canopy and Hardware Finish	Channel Finish
TXW2	5W	4SQ	15				27K	S	WM
TXW2 Tie Stix Wall 2-Light TXW2R Tie Stix Wall 2-Light Remote Power Supply, Class 2 wiring, UNI Driver, Title 24 Order Separately pg 5-7	5W 5 Watt	4SQ 4.6" Square 1RE 1" Rectangle with Junction Box 2RE 2" x 4" Rectangle	22K - 57K (Wood) (Metal) Exact Exact		27D & 30D (Wood) (Metal) Exact Exact		20K 2000K Sunset White 22K 2200K Amber White 24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim / Dim-To-Warm 30K 3000K Warm White 30D 3000K Warm Dim / Dim-To-Warm 35K 3500K Neutral White 40K 4000K Cool White 57K 5700K Daylight White	S Satin Nickel C Chrome Z Antique Bronze B Satin Black W White	WM Wood Maple WN Wood Walnut WC Wood Cherry WO Wood White Oak WE Wood Espresso SN Satin Nickel CH Chrome BZ Antique Bronze BK Satin Black WH White SB Satin Brass
15	15	15	15	15	15	15			
17 18.3"	17 17.9"	18 19.5"	18 19.5"	18 19.1"	18 19.1"				
22 23.1"	22 22.7"	21 22.5"	21 22.5"	21 22.1"	21 22.1"				
29 30.3"	29 29.9"	27 28.5"	27 28.5"	27 28.1"	27 28.1"				
34 35.1"	34 34.7"	33 34.5"	33 34.5"	33 34.1"	33 34.1"				
46 47.1"	46 46.7"	45 46.5"	45 46.5"	45 46.1"	45 46.1"				
58 59.1"	58 58.7"	57 58.5"	57 58.5"	57 58.1"	57 58.1"				
70 71.1"	70 70.7"	69 70.5"	69 70.5"	69 70.1"	69 70.1"				

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

TIE STIX

WALL 2-LIGHT


REV 06.29.21

Nominal Lamp Data: Lamp data for the Tie Stix 2-Light Adjustable

DESCRIPTION	TXW2									
	STANDARD EFFICIENCY, 100° DIFFUSED WHITE LENS WITHOUT LOUVER									
	5w (4.4 watts)									
WATTS PER FOOT										
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	
LUMENS PER FOOT (lm/ft)	226	251	275	341	301	341	345	375	399	
LUMENS PER WATT (lm/w)	51	57	62	71	68	71	78	85	90	
CRI	85+	90+	95+	93+	95+	92+	85+	85+	85+	

*27D, 30D - Warm Dim (4.8 Watts)



CANOPY & HARDWARE FINISHES:

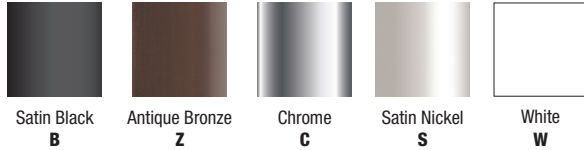


CHANNEL FINISHES:



Wood finishes are authentic natural products, exact color and grain may vary. If trying to match existing product original product must be returned to PureEdge to ensure the closest possible match.

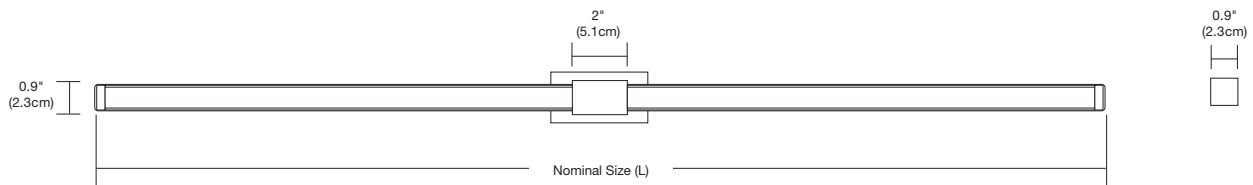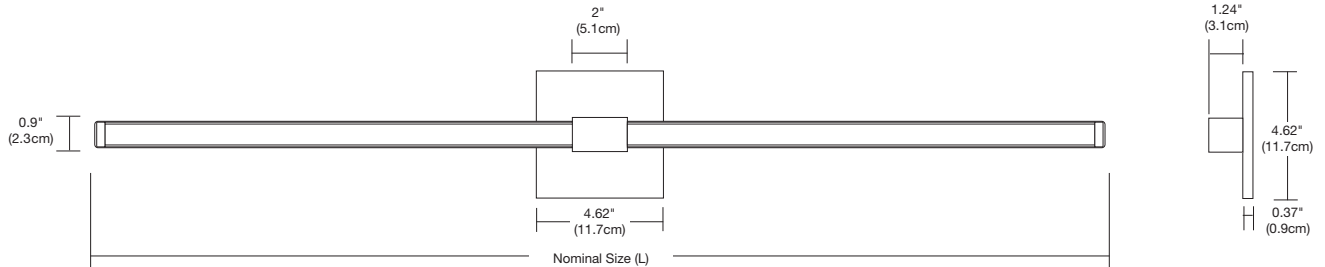

1RE Canopy with Junction Box (For New Construction Only)

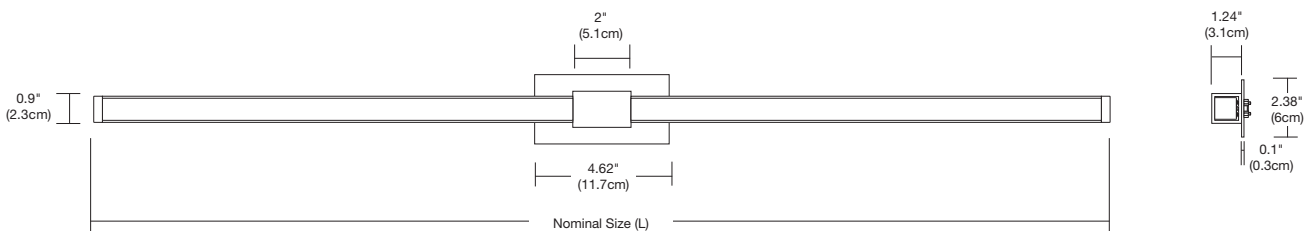

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



1RE Canopy in Cherry Wood with Satin Nickel Hardware



1RE Canopy in Cherry Wood with Antique Bronze Hardware



1RE Canopy in Espresso Wood with Satin Black Hardware



1RE Canopy in Espresso Wood with Chrome Hardware



1RE Canopy in Maple Wood with Satin Nickel Hardware



1RE Canopy in Maple Wood with Antique Bronze Hardware



1RE Canopy in Walnut Wood with Satin Nickel Hardware



1RE Canopy in Walnut Wood with Antique Bronze Hardware



1RE Canopy in White Oak Wood with Satin Nickel Hardware



1RE Canopy in White Oak Wood with Antique Bronze Hardware



1RE Canopy in Antique Bronze with Antique Bronze Hardware



1RE Canopy in Satin Brass with White Hardware




1RE Canopy in Chrome with Chrome Hardware




1RE Canopy in Satin Black with Chrome Hardware



1RE Canopy in Satin Black with Satin Black Hardware

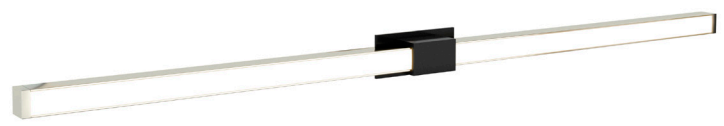

1RE Canopy in Satin Nickel with Satin Black Hardware

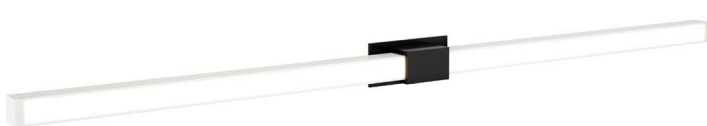

1RE Canopy in White with Satin Black Hardware



2RE Canopy in Cherry Wood with Satin Black Hardware



2RE Canopy in Cherry Wood with Satin Nickel Hardware




2RE Canopy in White with Satin Black Hardware

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


TIE STIX
WALL 2-LIGHT




2RE Canopy in White with Satin Nickel Hardware

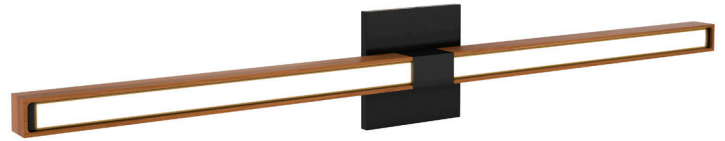


4SQ Canopy in Cherry Wood with Antique Bronze Hardware

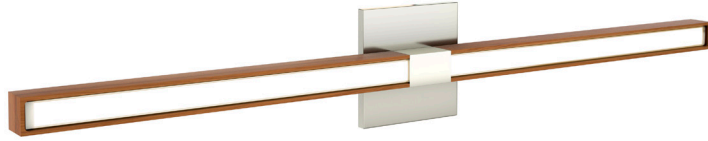


4SQ Canopy in Cherry Wood with Satin Nickel Hardware

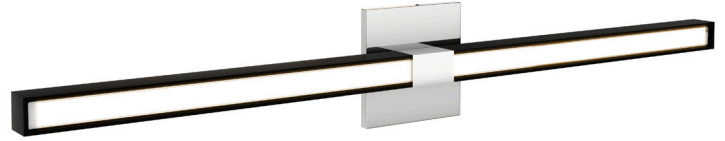


4SQ Canopy in Espresso Wood with Chrome Hardware

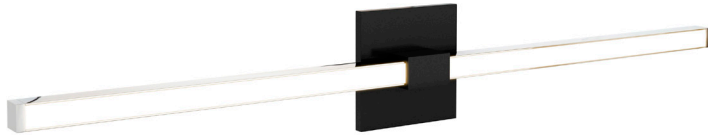


4SQ Canopy in Chrome with Satin Black Hardware

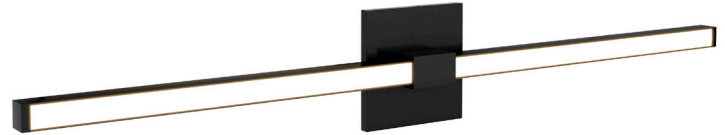

4SQ Canopy in Satin Black with Satin Black Hardware

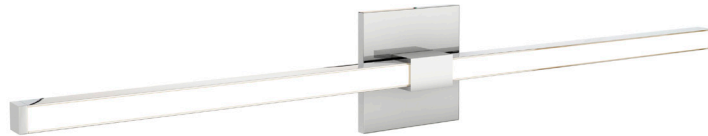


4SQ Canopy in Chrome with Chrome Hardware

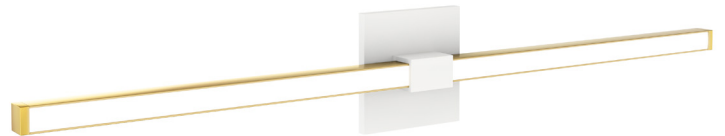

4SQ Canopy in Satin Brass with White Hardware



4SQ Canopy in Satin Black with Chrome Hardware

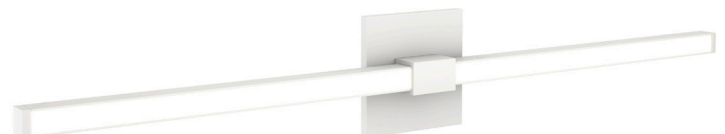

4SQ Canopy in White with White Hardware

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

UNIVERSAL POWER SUPPLIES & RECOMMENDED DIMMERS

ORDERING CODE	PSB-40W-UNI-24VDC 	PSB-60W-UNI-24VDC 	PSB-2X40W-UNI-24VDC 	PSB-2X60W-UNI-24VDC
SPECIFICATIONS				
MAXIMUM LOAD	40W	60W	2X40W	2X60W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 3.12" X 2.18"	12.4" X 3.12" X 2.18"	12.15" X 6.48" X 2.18"	12.15" X 6.48" X 2.18"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
T-BAR MOUNTING	PSB-40W-UNI-24VDC-TB	PSB-60W-UNI-24VDC-TB	PSB-2X40W-UNI-24VDC-TB	PSB-2X60W-UNI-24VDC-TB
IN-WALL MOUNTING	PSB-40W-UNI-24VDC-IW	PSB-60W-UNI-24VDC-IW	PSB-2X40W-UNI-24VDC-IW	PSB-2X60W-UNI-24VDC-IW

UNIVERSAL POWER SUPPLIES & RECOMMENDED DIMMERS

ORDERING CODE	PSB-96W-UNI-24VDC 	PSB-2X96W-UNI-24VDC 	PSB-3X96W-UNI-24VDC 	PSB-4X96W-UNI-24VDC
SPECIFICATIONS				
MAXIMUM LOAD	96W	2X96W	3X96W	4X96W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 3.12" X 2.18"	12.15" X 6.48" X 2.18"	14" X 10" X 3"	17" X 13" X 3"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
T-BAR MOUNTING	PSB-96W-UNI-24VDC-TB	PSB-2X96W-UNI-24VDC-TB	PSB-3X96W-UNI-24VDC-TB	PSB-4X96W-UNI-24VDC-TB
IN-WALL MOUNTING	PSB-96W-UNI-24VDC-IW	PSB-2X96W-UNI-24VDC-IW	NA	NA

ELV DIMMING & CONTROLS

LUTRON DIVA: DVELV-300P	•	•	•	•
LUTRON SKYLARK: SELV-300P	•	•	•	•
LUTRON RADIO RA2: RRD-6NA	•	•	•	•
LUTRON MAESTRO: MAELV-600	•	•	•	•
LEGRAND ADORNE: ADTP-703TUM4	•	•	•	•

0-10 DIMMING & CONTROLS

PHILIPS SUNRISE: SR1200ZTUNV	•	•	•	•
LUTRON DIVA: DDTV-WH, DVSTV-WH	•	•	•	•
LUTRON NOVA T: NTSTV-DV-XX	•	•	•	•
LUTRON GRAFIX EYE QS: QSGRJ-XP	•	•	•	•
LUTRON RADIO RA2: RRD-10ND	•	•	•	•
LEVITON: LEV40050	•	•	•	•
LEVITON IP710-LFZ	•	•	•	•
LEGRAND: ADPD4FBL3P2W4	•	•	•	•


TRIAC DIMMING & CONTROLS

LUTRON SKYLARK: S2-L-WH	•	•	•	•
LUTRON DIVA DVLV-600P-WH	•	•	•	•
LUTRON DIVA DVLV-603P-WH	•	•	•	•
LUTRON MAESTRO MALV-600-WH	•	•	•	•
LUTRON MAESTRO MALV-1000-WH	•	•	•	•
LUTRON MAESTRO MA-R-XX	•	•	•	•

- Flicker free dimming
- Aluminum casing for optimal heat dissipation
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements
- Auto-reset; short circuit, overload and thermal protection
- Class 2 power supply
- Efficient, High power factor > 0.90


- The Solid State Constant Voltage Uni-Power Supply is compatible with most commercially available Dimmers:
 - Triac Dimmer: (Forward Phase) Typically used for the dimming of Incandescent and Low Voltage Magnetic Transformers
 - ELV Dimmer: (Reverse Phase) Dimming of Electronic Low Voltage Transformers and Power Supplies used for LED lighting
 - 0-10 Dimmer: Dims the Low Voltage side of a 0-10 volt power supply commonly used in large scale lighting or commercial applications.
- The Uni-Power Supply is recommended with any Siemens/Murray brand of arc fault breaker to overcome the issues with tripping the breakers with an ELV LED Low Voltage Drivers.

*Tunable White requires Dual power Supplies and Controls. For single control use with our proprietary Tunable White Controller CDMX-1, refer to Universal Tunable White Power Supply Specifications. Up + Down Light fixtures and Systems can be controlled individually or together depending on the power supply selection.



T-BAR Mounting Kit: Includes power supply, box cover, and T-bar hangers for installing Junction Box above ceiling with in easy reach. Comes with 4' of 14 gauge pair Teflon cables with quick secure connectors.

Ordering Codes : PSB-40W-UNI-24VDC-TB, PSB-60W-UNI-24VDC-TB, PSB-96W-UNI-24VDC-TB, PSB-2X40W-UNI-24VDC-TB, PSB-2X60W-UNI-24VDC-TB, PSB-2X96W-UNI-24VDC-TB, PSB-3X96W-UNI-24VDC-TB, PSB-4X96W-UNI-24VDC-TB



In-Wall Mounting Kit: Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.

Ordering Codes 5.1" x 14.25": PSB-40W-UNI-24VDC-IW, PSB-60W-UNI-24VDC-IW, PSB-96W-UNI-24VDC-IW


Ordering Codes 8.5" x 14.25": PSB-2X40W-UNI-24VDC-IW, PSB-2X60W-UNI-24VDC-IW, PSB-2X96W-UNI-24VDC-IW

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

WIRING DIAGRAMS UNIVERSAL POWER SUPPLY


Application: ELV dimming for Static White and Warm Dim

Dimming: Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

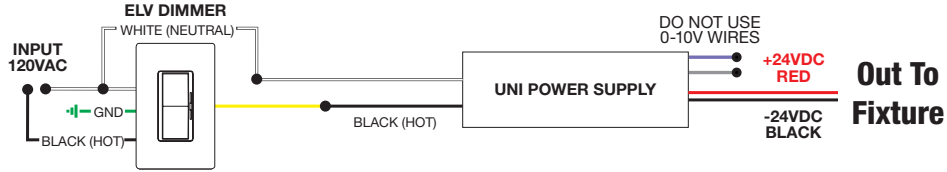


Application: 0-10V dimming for Static White

Dimming: Dimmable with 0-10V dimmer: Philips Sunrise: SR1200ZTUNV; Lutron Diva: DVTV-WH, DVSTV-WH; Lutron Nova T: NTSTV-DV-XX; Lutron Grafix EYE QS: QSGRJ-XP; Lutron Radio Ra2: RRD-10ND; Leviton: LEV40050; Leviton IP710-LFZ; Legrand: ADPD4FBL3P2W4

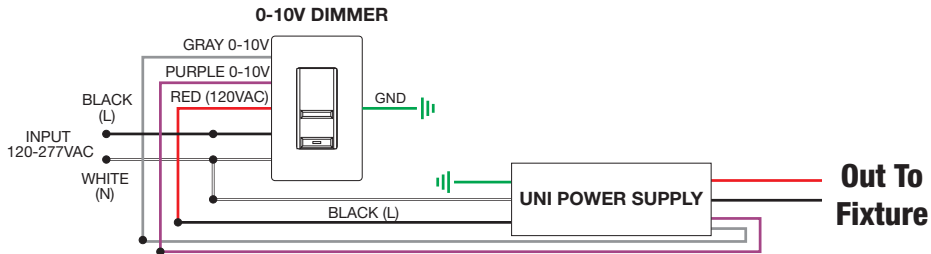

Application: Triac dimming for two power supplies, use for Static White

Dimming: Dimmable with Triac dimmer: Lutron: Skylark S2-L

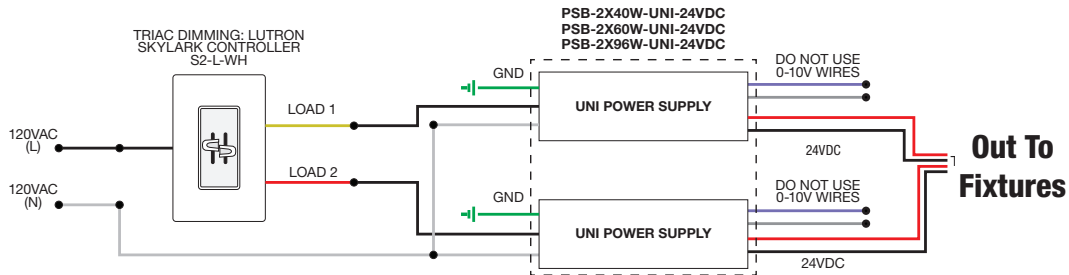




PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

INDOOR CONSTANT VOLTAGE REMOTE POWER SUPPLIES


24VDC, LUTRON ECOSYSTEM

LUTRON HI-LUME® PREMIER .1% ECOSYSTEM®†

ORDERING CODES	L3D0-96W24V-U	2-WIRE ECOSYSTEM LTEA4U1UKL-CV240	3-WIRE ECOSYSTEM L3DA4U1UKL-CV240
			
SPECIFICATIONS			
MAXIMUM LOAD	96W	5W-40W	5W-40W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC
DIMENSIONS	10.5" X 5.5" X 2"	4" X 4.89" X 2.62"	4" X 4.89" X 2.62"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2
T-BAR MOUNTING	L3D0-96W24V-U-TB	NA	NA
DIMMING AND CONTROLS			
RADIO RA2	•	•	•
HOMEWORKS QS	•	•	•
PHPM-3F-120	•	•	•
PHPM-3F-DV	•	•	•
BCI-0-10	•	•	•


†24K - 57K color temperatures are compatible with 0-10V, ELV, and Lutron Hi-lume® Power Supplies. Warm Dim (27D, 30D) color temperatures are only compatible with ELV power supplies.

2-Wire EcoSystem Wiring Diagram

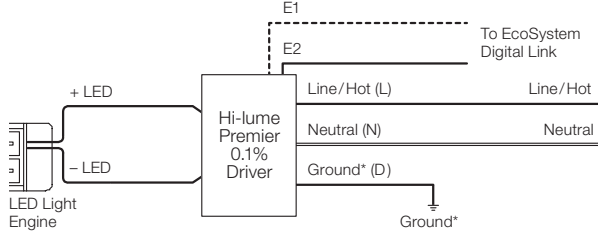


LTEA4U1UKL-CV240

3-Wire Wiring Diagram

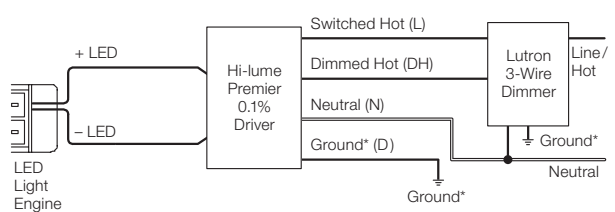

L3DA4U1UKL-CV240

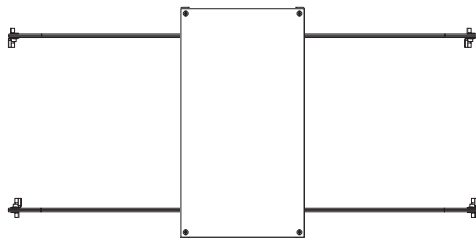

T-BAR Mounting Kit: Includes power supply, box cover, and T-bar hangers for installing Junction Box above ceiling with in easy reach. Comes with 4ft of 14 gauge pair Teflon cables with quick secure connectors.

Ordering Code: L3D0-96W24V-U-TB


PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

VANITY TM30 DATA

WALL 2-LIGHT

TM-30-15 DATA: The data below is for SS5C and SS7C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2200K | Rf: 83.9 | Rg: 94.9
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	78.8	-9.5%	1.3%
2	80.7	-7.8%	6.7%
3	78.2	-3.3%	9.4%
4	89.7	-2.8%	3.6%
5	93.2	-0.8%	2.6%
6	93.0	-0.6%	-0.7%
7	87.7	-5.9%	-3.5%
8	89.2	-6.8%	1.9%
9	83.4	-5.6%	6.0%
10	79.3	-3.7%	10.8%
11	81.4	2.9%	11.1%
12	84.9	5.3%	4.9%
13	88.1	4.9%	-10.1%
14	68.1	0.1%	-19.5%
15	86.0	-3.3%	-7.3%
16	76.4	-8.9%	-11.7%


2400K | Rf: 84.5 | Rg: 94.4
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	82.3	-8.3%	-1.4%
2	82.3	-7.7%	5.0%
3	78.6	-3.5%	9.7%
4	87.0	1.2%	7.4%
5	92.0	3.5%	5.1%
6	93.0	4.1%	-0.7%
7	87.7	-0.4%	-7.0%
8	91.1	-3.8%	-3.3%
9	88.2	-6.1%	-0.6%
10	83.4	-6.4%	6.3%
11	82.7	-1.5%	10.9%
12	84.7	3.2%	5.4%
13	88.9	5.1%	-4.7%
14	79.8	4.7%	-11.4%
15	86.4	0.2%	-8.6%
16	80.6	-5.9%	-11.6%


2700K | Rf: 87.7 | Rg: 96.1
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%


3000K | Rf: 88.1 | Rg: 99.7
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%


3500K | Rf: 86.1 | Rg: 95.5
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

4000K | Rf: 87.6 | Rg: 96.8
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------


VANITY TM30 DATA

WALL 2-LIGHT

TM-30-15 DATA: The data below is for SS5C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

5700K | Rf: 80.3 | Rg: 91.5

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	75.4	-8.9%	4.7%
2	87.5	-2.6%	4.6%
3	90.7	-3.0%	-0.5%
4	83.2	-6.0%	-5.7%
5	76.2	-12.9%	-5.3%
6	81.4	-11.9%	-2.6%
7	74.8	-14.0%	5.1%
8	69.0	-9.0%	14.1%
9	72.6	-3.6%	22.2%
10	71.4	2.7%	16.1%
11	81.3	7.9%	5.3%
12	83.6	4.1%	-9.4%
13	78.4	0.7%	-15.3%
14	77.7	-6.2%	-11.0%
15	68.8	-1.3%	-21.2%
16	80.8	-9.6%	3.3%

2700D | Rf: 89.5 | Rg: 100.8

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.8	-5.1%	1.4%
2	89.8	-2.7%	4.1%
3	87.2	0.3%	5.9%
4	92.3	-0.9%	1.0%
5	93.3	1.5%	1.7%
6	92.4	3.6%	-0.2%
7	92.2	-0.9%	-2.4%
8	96.7	-0.4%	-1.1%
9	92.3	-1.2%	3.7%
10	88.9	-0.0%	6.1%
11	86.4	5.1%	7.4%
12	88.2	6.3%	-0.9%
13	87.2	3.8%	-8.1%
14	84.2	3.8%	-11.0%
15	89.8	-2.6%	-4.3%
16	82.7	-3.4%	-11.1%

3000D | Rf: 89.8 | Rg: 101.4

Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.2	-4.2%	1.5%
2	90.9	-2.0%	3.7%
3	87.9	0.8%	5.5%
4	92.1	-0.9%	0.6%
5	93.0	1.5%	1.6%
6	92.2	3.9%	-0.2%
7	92.1	-0.3%	-2.0%
8	96.7	0.0%	-1.2%
9	92.5	-0.6%	3.7%
10	88.3	1.1%	7.0%
11	87.2	4.1%	7.4%
12	87.2	6.7%	-1.0%
13	88.2	3.8%	-7.2%
14	85.3	4.3%	-9.9%
15	90.9	-2.2%	-3.6%
16	83.4	-2.2%	-11.2%

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------