


STEP 1 Cut into 5/8" drywall.

STEP 2 Plaster.

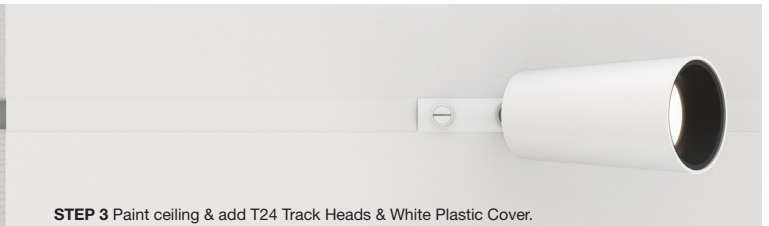

STEP 3 Paint ceiling & add T24 Track Heads & White Plastic Cover.

DESCRIPTION

TruTrack is a plaster-in recessed 24VDC single circuit track that is only as thick as the 5/8" drywall, eliminates the concern of hitting studs, and allows more flexibility to make turns along the ceiling. For a complete and clean architectural look, a paintable slot cover will be supplied with TruTrack so only the Track Head will be visible once installed.

FEATURES

- Design for use with a 24VDC Remote Power Supply up to 40' away
- With Remote Power Supply, smaller Track Heads can be utilized for a refined look
- Track Heads come in two options, Warm Dim - 3000K dims to 1900K, 95 CRI or 3000K Standard Dim
- Track Head Lumen Output from 6 Watts, 539 Lumens to 8.7 Watts, 690 Lumens, with 4 different Beam Spreads to choose from
- Track Power Feeds may be ordered in End, Center, L, T, and X, up to 200 Watts before re-feeding, 400 Watts at Center Feed, 100 watts max for soft strip
- Recessed TruTrack Channel is available in 2', 4', 6', and 8' lengths, with the ability to be cut at the job site
- White Plastic Cover is included with TruTrack Channel to hide Recessed Track Slot and may be painted to match the ceiling
- 10 Gauge Bus Bar to help eliminate voltage drop

FINISH & MATERIAL

- White Powder Paint
- Extruded Aluminum Channel, conductors are a pair of #10 Gauge Copper Bus

APPLICATIONS

Suitable for damp or dry location. Interior use only


INTEGRAL LED LAMP

- 30D (Warm Dim 3000K-1900K) or 30K (3000K Standard Dim)
- 50,000 Hour Lamp Life

24VDC POWER SUPPLIES (SOLD SEPARATELY)

- 24VDC Low Voltage Remote Power Supply, from 25-2x200 Watts, for track, Soft strip limit to 100 watts
- 25 Watts, 100 Watts UL Class 2 or 200 Watts UL 2108
- 0-10V Dimming (0-10V up to 200 Watts), Remote only
- Lutron Hi-lume®, Remote only


WARRANTY / LABELS

5 year warranty. Assembled in America 
 ETL (Conforms to UL 1598 and CSA 22.2 #250.0),
 California Title 24: 4th quarter 2018

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------





SINGLE CIRCUIT RECESSED 24VDC TRACK

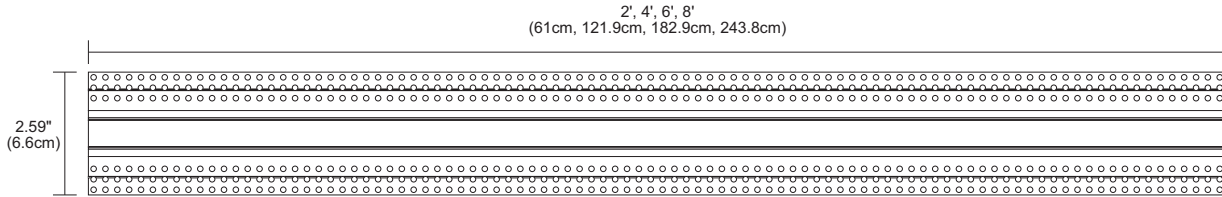

SINGLE CIRCUIT TRACK

Made of extruded Aluminum Channel with 10 gauge bus bar to help eliminate voltage drop and is designed for use with 24VDC Remote Power Supply, sold separately. Includes two Opaque Covers for Track Slot.

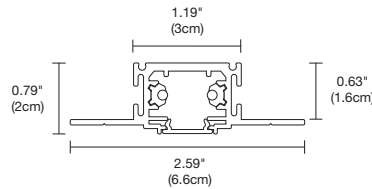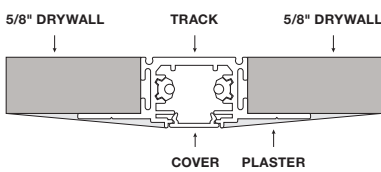

System	Circuit	Length in Feet	Color
TR24	1C	8FT	WH
TR24 TruTrack Recessed	1C Single Circuit	2FT 2' 4FT 4' 6FT 6' 8FT 8'	WH White Powder Paint

OPAQUE SLOT COVER

Included with each Recessed Track are two paintable Plastic Slot Covers.



System	Type	Length in Feet	Color
T24	SCO	8FT	WH
T24 Track Recessed 24VDC	SCO Opaque Cover for Track Slot	8FT 8'	WH White


COMPONENTS Power Feeds

END POWER FEED WITH JUNCTION BOX



System	Type	Cover Size	24VDC Power Supply (Title 24 Compliant)	Drywall	Color
TR24	EP1	1RE	RT	ST	WH
TR24 TruTrack Recessed	EP1 End Power Feed Single Circuit up to 200 Watts, 24VDC	1RE 1" Rectangle raised Cover over standard 2.5" J-box for Remote Power Supply only	RT 24VDC Remote Power Supply (Not Included)	ST Standard 5/8" Drywall	WH White Cover

END POWER FEED




System	Type	Cover Size	24VDC Power Supply (Title 24 Compliant)	Drywall	Color
TR24	EP1	3SQ	RT	AJ	WH
TR24 TruTrack Recessed	EP1 End Power Feed Single Circuit up to 200 Watts, 24VDC	3SQ 3" Square Cover on standard 2.5" deep Electrical J-box for Remote Power Supply	RT 24VDC Remote Power Supply (Not Included)	ST Standard 5/8" Drywall AJ 0.75"-1.5" Drywall	WH White Cover

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

COMPONENTS Power Feeds (cont'd)




CENTER POWER FEED WITH JUNCTION BOX




System	Type	Cover Size	24VDC Power Supply (Title 24 Compliant)	Drywall	Color
TR24	CP1	1RE	RT	ST	WH
TR24 TruTrack Recessed	CP1 Center Power Feed Single Circuit Dual Feed up to 2x200 Watts, 24VDC	1RE 1" Rectangle raised Cover over standard 2.5" J-box for Remote Power Supply only	RT 24VDC Remote Power Supply (Not Included)	ST Standard 5/8" Drywall	WH White Cover

CENTER POWER FEED




System	Type	Cover Size	24VDC Power Supply (Title 24 Compliant)	Drywall	Color
TR24	CP1	3SQ	RT	ST	WH
TR24 TruTrack Recessed	CP1 Center Power Feed Single Circuit Dual Feed up to 2x200 Watts, 24VDC	3SQ 3" Square Cover on standard 2.5" deep Electrical J-Box for Remote Power Supply	RT 24VDC Remote Power Supply (Not Included)	ST Standard 5/8" Drywall AJ 0.75"-1.5" Drywall	WH White Cover

L-SHAPED POWER CONNECTOR



System	Type	Cover Size	24VDC Power Supply (Title 24 Compliant)	Drywall	Color
TR24	LP1	1RE	RT	ST	WH
TR24 TruTrack Recessed	LP1 L-Shaped Power Connector Single Circuit Dual Feed up to 2x200 Watts, 24VDC	1RE 1" Rectangle raised Cover over standard 2.5" J-box for Remote Power Supply only	RT 24VDC Remote Power Supply (Not Included)	ST Standard 5/8" Drywall	WH White Cover


L-SHAPED POWER FEED WITH JUNCTION BOX



System	Type	Cover Size	24VDC Power Supply (Title 24 Compliant)	Drywall	Color
TR24	LP1	3SQ	RT	ST	WH
TR24 TruTrack Recessed	LP1 L-Shaped Power Single Circuit Dual Feed up to 2x200 Watts, 24VDC	3SQ 3" Square Cover on standard 2.5" deep Electrical J-Box for Remote Power Supply	RT 24VDC Remote Power Supply (Not Included)	ST Standard 5/8" Drywall AJ 0.75"-1.5" Drywall	WH White Cover

L-CONNECTOR

Conductive or Non-Conductive L-Connector joins two straight TruTrack Channels together to make a 90° angle. Order Non-Conductive when adding two Power Supplies in a square configuration.

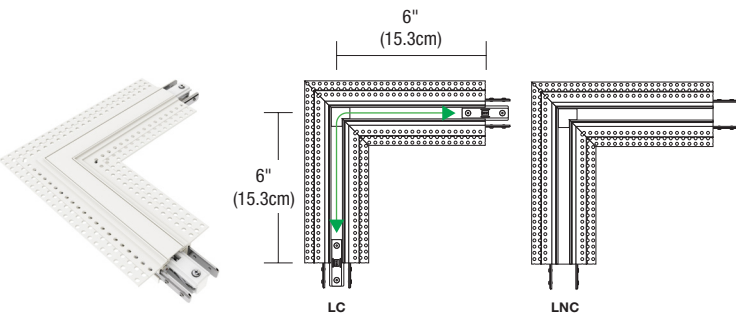


System	Type	Color
TR24	LC	WH
TR24 TruTrack Recessed	LC L-Connector Conductive LNC L-Connector Non-Conductive	WH White Cover

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

COMPONENTS Power Feeds (cont'd)




T-SHAPED POWER FEED WITH JUNCTION BOX




System	Type	Cover Size	24VDC Power Supply (Title 24 Compliant)	Drywall	Color
TR24	TP1	3SQ	RT	ST	WH
TR24 TruTrack Recessed	TP1 T-Shaped Power Feed Single Circuit, Dual Feed up to 3x200 Watts, 24VDC	3SQ 3" Square Cover on standard 2.5" deep Electrical J-box for Remote Power Supply	RT 24VDC Remote Power Supply (Not Included)	ST Standard 5/8" Drywall AJ 0.75"-1.5" Drywall	WH White Cover

X-SHAPED POWER FEED WITH JUNCTION BOX




System	Type	Cover Size	24VDC Power Supply (Title 24 Compliant)	Drywall	Color
TR24	XP1	3SQ	RT	ST	WH
TR24 TruTrack Recessed	XP1 X-Shaped Power Feed Single Circuit, Dual Feed up to 4x200 Watts, 24VDC	3SQ 3" Square Cover on standard 2.5" deep Electrical J-box for Remote Power Supply	RT 24VDC Remote Power Supply (Not Included)	ST Standard 5/8" Drywall AJ 0.75"-1.5" Drywall	WH White Cover

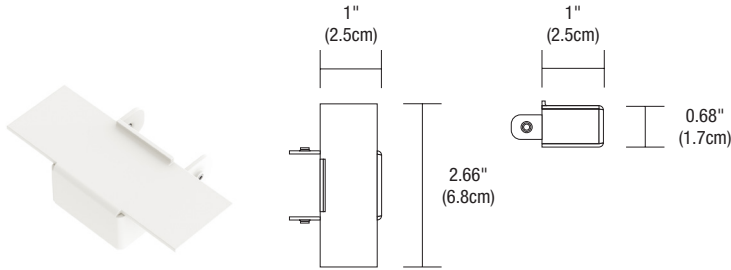

END CAP

Need to order with each dead end of TR24 Track System.

System	Type	Color
TR24	CA	WH
TR24 TruTrack Recessed	CA End Cap	WH White Cover

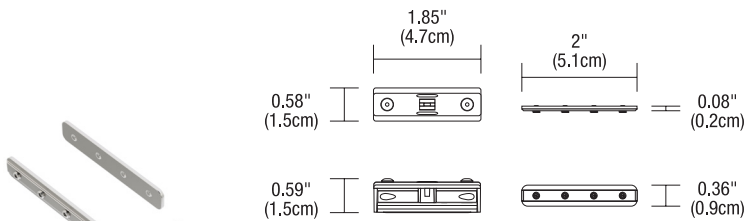

STRAIGHT CONNECTOR








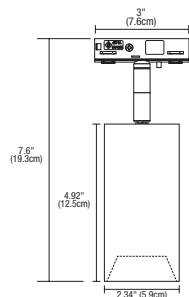
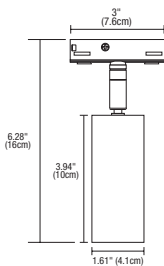

Miniature Straight Connector joins two Track sections end to end and is covered by the Plastic Insert.

System	Type
T24	SC
T24 Track Recessed 24VDC	SC Straight Connector Conductive SNC Straight Connector Non-Conductive






SC

SNC

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------






T24 TRACK HEADS 0-10V DIMMING ONLY					
PRODUCT	RADIANT LARGE	RADIANT MEDIUM	TUBO LARGE	TUBO SMALL	DELTA SMALL
T24 WARM DIM TRACK HEADS COMPARISON CHART					
WARM DIM ORDERING CODE	T24-RADL-FL-30D-(BK OR WH)	T24-RADM-FL-30D-(BK OR WH)	T24-TUBL-FL-30D-(BK OR WH)	T24-TUBS-FL-30D-(BK OR WH)	T24-DELS-FL-30D-(BK OR WH)
STANDARD STATIC WHITE ORDERING CODE	T24-RADL-FL-30K-(BK OR WH)	T24-RADM-FL-30K-(BK OR WH)	T24-TUBL-FL-30K-(BK OR WH)	T24-TUBS-FL-30K-(BK OR WH)	T24-DELS-FL-30K-(BK OR WH)
SPECIFICATIONS					
T24 TRACK HEADS					
DESCRIPTION	The RADIANT LARGE WARM DIM LED 24VDC TRACK HEAD includes reflector with ordering code that may be changed at the job site. Reflectors give a smooth uniform beam at Spot (SP) 15°, Narrow Flood (NF) 25°, Flood (FL) 40° or Wide Flood (WF) 60° beam spreads.	The RADIANT MEDIUM WARM DIM LED 24VDC TRACK HEAD includes reflector with ordering code that may be changed at the job site. Reflectors give a smooth uniform beam at Spot (SP) 20°, Flood (FL) 40° or Wide Flood (WF) 60° beam spreads.	The TUBO LARGE WARM DIM LED 24VDC TRACK HEAD includes reflector with ordering code that may be changed at the job site. Reflectors give a smooth uniform beam at Spot (SP) 15°, Narrow Flood (NF) 25°, Flood (FL) 40° or Wide Flood (WF) 60° beam spreads.	The TUBO SMALL WARM DIM LED 24VDC TRACK HEAD includes reflector with ordering code that may be changed at the job site. Reflectors give a smooth uniform beam at Spot (SP) 20°, Flood (FL) 40° or Wide Flood (WF) 60° beam spreads.	The DELTA SMALL WARM DIM LED 24VDC TRACK HEAD includes reflector with ordering code that may be changed at the job site. Reflectors give a smooth uniform beam at Spot (SP) 20°, Flood (FL) 40° or Wide Flood (WF) 60° beam spreads.
WATTAGE	8.7 WATTS	8.7 WATTS	8.7 WATTS	6.5 WATTS	6.5 WATTS
TOTAL LUMENS*	638 TOTAL LUMENS	872 TOTAL LUMENS	690 TOTAL LUMENS	411 TOTAL LUMENS	539 TOTAL LUMENS
LUMENS PER WATT*	73 LUMENS PER WATT	101 LUMENS PER WATT	79 LUMENS PER WATT	63 LUMENS PER WATT	90 LUMENS PER WATT
COLOR TEMPERATURE	3000K WARM DIMS TO 1900K	3000K WARM DIMS TO 1900K	3000K WARM DIMS TO 1900K	3000K WARM DIMS TO 1900K	3000K WARM DIMS TO 1900K
CRI	96	91	95	98	96
R9	80	82	79	83	82
R13	97	92	97	98	98
Rf	93	91	92.5	92.5	93
Rg	100	99	100	101	100
FINISH	Available in Black Powder Paint (BK) or White Powder Paint (WH)				
MATERIAL	Each T24 Track Head is made from Cast Aluminum				
INPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC	24VDC
FREQUENCY	50/60HZ	50/60HZ	50/60HZ	50/60HZ	50/60HZ
POWER FACTOR	> 0.90	> 0.90	> 0.90	> 0.90	> 0.90
APPLICATION	Suitable for damp or dry locations. Indoor use only.				
DIMMING & FLICKER	0-10V dimming Flicker less than 4%				
COMPATIBLE DIMMERS	0-10V or Lutron Hi-lume [®]				
COMPLIANCE LABEL	ETL TO UL 2108 STANDARD	ETL TO UL 2108 STANDARD	ETL TO UL 2108 STANDARD	ETL TO UL 2108 STANDARD	ETL TO UL 2108 STANDARD
LED LAMP LIFE	50,000 HOURS	50,000 HOURS	50,000 HOURS	50,000 HOURS	50,000 HOURS
For more detailed information, please view Product Spec Sheet for each Track Head at www.PureEdgeLighting.com					

*Lumens & TM-30 Data based on 3000K 40° Beam Spread






REPLACEMENT REFLECTORS FOR TRACK HEADS					
PRODUCT	RADIANT LARGE	RADIANT MEDIUM	TUBO LARGE	TUBO SMALL	DELTA SMALL
					
ORDERING CODE	REF-1.75-(SP, NF, FL, WF)	REF-1.375-(SP, FL, WF)	REF-1.75-(SP, NF, FL, WF)	REF-1.375-(SP, FL, WF)	REF-1.375-(SP, FL, WF)
REFLECTOR SIZE	1.75" Diameter	1.375" Diameter	1.75" Diameter	1.375" Diameter	1.375" Diameter
BEAM SPREADS	SP (15°), NF (25°), FL (40°), WF (60°)	SP (20°), FL (40°), WF (60°)	SP (15°), NF (25°), FL (40°), WF (60°)	SP (20°), FL (40°), WF (60°)	SP (20°), FL (40°), WF (60°)

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

FILM LENS SOFT FOCUS

	RADIANT LARGE	RADIANT MEDIUM	TUBO LARGE	TUBO SMALL	DELTA SMALL
PRODUCT					
ORDERING CODE	LF1.75-SF	LF1.387-SF	LF2.0-SF	LF1.415-SF	LF1.75-SF

FILM LENS LINEAR SPREAD

	RADIANT LARGE	RADIANT MEDIUM	TUBO LARGE	TUBO SMALL	DELTA SMALL
PRODUCT					
ORDERING CODE	LF1.75-LS	LF1.387-LS	LF2.0-LS	LF1.415-LS	LF1.75-LS

PENDANTS Various Pendants available for TruTrack Recessed



T24-BBCL-10FT-24-WH
Fast Jack Bubble Ball
Fixture Finishes: SN



T24-EVE-PL-24-WH
Fast Jack Everest
Color: Clear (CL), Platinum (PL)
Fixture Finishes: SN, PN, BZ



T24-SALUTI-SM-CR-24-WH
Fast Jack Saluti
Size: 3" (SM), 4" (MD), 5.5" (LG)
Glass Color: Cristallo (CR)
Fixture Finishes: SN, PN, BZ



JC20XE/24 20 WATT 200 LUMENS
JC10XE/24 10 WATT 95 LUMENS
24V G4 Xenon Lamp
JC type G4 Bipin base
low voltage 24V Xenon bulb
2000 hours lamp life

Lamps included with all PureEdge Pendants.
For more Lamp Data, see Product Spec Sheets on PureEdgeLighting.com



T24 FAST JACK FEMALE TRACK CONNECTOR

Use the Fast Jack T24 Female Track Connectors to adapt any Coaxial Pendant fixtures (with 3/32" diameter Coaxial Cable) to PureEdge Lighting TruTrack and Pipeline 24VDC Circuit Systems. 7lbs. weight limit.

System	Type	Color
T24	FJ	WH
T24 Track Recessed 24VDC	FJ Fast Jack Connector	BK Black WH White



FAST JACK 24VDC MALE CONNECTOR

Fast Jack 24VDC Male Connector use with any Coaxial Pendant fixtures (with 3/32" diameter Coaxial Cable and 24VDC bulb) to PureEdge Lighting TruTrack and Pipeline 24VDC Circuit Systems. 7lbs. weight limit.

System	Type	Color
FJ	MC24	SN
FJ Fast Jack	MC24 Male Connector 24 Volt	SN Satin Nickel


PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

REMOTE POWER SUPPLIES 24VDC 0-10V Compatible Power Supplies (Title 24 Compliant)

0-10V (010) POWER SUPPLIES & RECOMMENDED DIMMERS				
ORDERING CODE	PSB-25W-010-24VDC	PSB-60W-010-24VDC	PSB-96W-010-24VDC	PSB-2X96W-010-24VDC
SPECIFICATIONS				
MAXIMUM LOAD	25W	60W	96W	2X96W
INPUT VOLTAGE	120VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 3.12" X 2.18"	12.4" X 3.12" X 2.18"	12.4" X 3.12" X 2.18"	12.15" X 6.48" X 2.18"
CLASSIFICATION	CLASS 2 (TITLE 24 COMPLIANT)	CLASS 2 (TITLE 24 COMPLIANT)	CLASS 2 (TITLE 24 COMPLIANT)	CLASS 2 (TITLE 24 COMPLIANT)
IN-WALL MOUNTING	PSB-25W-010-24VDC-IW	PSB-60W-010-24VDC-IW	PSB-96W-010-24VDC-IW	PSB-2X96W-010-24VDC-IW
DIMMING & CONTROLS				
PHILIPS SUNRISE: SR1200ZTUNV	•	•	•	•
LUTRON DIVA: DVTV-WH	•	•	•	•
LUTRON NOVA T: NTSTV-DV-XX	•	•	•	•
LUTRON GRAFIX EYE QS: QSGRJ-XP	•	•	•	•
LUTRON RADIO RA2: RRD-10ND	•	•	•	•
LEVITON: LEV40050	•	•	•	•
LEVITON IP710-LFZ	•	•	•	•
LEGRAND: ADPD4FBL3P2W4	•	•	•	•

0-10V (010) POWER SUPPLIES & RECOMMENDED DIMMERS [†]				
ORDERING CODE	PSB-3X96W-010-24VDC	PSB-4X96W-010-24VDC	PSB-200W-010-24VDC	PSB-2X200W-010-24VDC
SPECIFICATIONS				
MAXIMUM LOAD	3X96W	4X96W	200W	2X200W
INPUT VOLTAGE	120-277VAC	120-277VAC	120VAC	120VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	14" X 10" X 3"	17" X 13" X 3"	12.15" X 6.48" X 2.18"	14" X 10" X 3"
CLASSIFICATION	CLASS 2 (TITLE 24 COMPLIANT)	CLASS 2 (TITLE 24 COMPLIANT)	UL1598* (TITLE 24 COMPLIANT)	UL1598* (TITLE 24 COMPLIANT)
IN-WALL MOUNTING	N/A	N/A	PSB-200W-010-24VDC-IW	N/A
DIMMING & CONTROLS				
PHILIPS SUNRISE: SR1200ZTUNV	•	•	•	•
LUTRON DIVA: DVSTV-WH	•	•	•	•
LUTRON NOVA T: NTSTV-DV-XX	•	•	•	•
LUTRON GRAFIX EYE QS: QSGRJ-XP	•	•	•	•
LEVITON: LEV40050	•	•	•	•
LEVITON IP710-LFZ	•	•	•	•
LEGRAND: ADPD4FBL3P2W4	•	•	•	•


Classification: UL2108 - * 24VDC over 100 Watts, wires must be in conduit from Remote Power Supply to Junction Box in ceiling.



5.1" X 14.25" IN-WALL MOUNTING KIT

Includes Power Supply, Box Cover, and Stud Hangers for installing Junction Box in wall. Select "IW" in the options section of compatible Power Supply ordering codes if an In-Wall Mounting Kit is needed.

ORDERING CODES: PSB-25W-010-24VDC-IW, PSB-60W-010-24VDC-IW, PSB-96W-010-24VDC-IW




8.5" X 14" IN-WALL MOUNTING KIT

Includes Power Supply, Box Cover, and Stud Hangers for installing Junction Box in wall. Select "IW" in the options section of compatible Power Supply ordering codes if an In-Wall Mounting Kit is needed.

ORDERING CODES: PSB-2X96W-010-24VDC-IW, PSB-200W-010-24VDC-IW

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

REMOTE POWER SUPPLIES 24VDC Lutron Compatible Power Supply (Title 24 Compliant)

LUTRON HI-LUME [®] PREMIER .1% ECOSYSTEM [®] 3-WIRE POWER SUPPLY & RECOMMENDED CONTROLLERS	
ORDERING CODE	<p>L3D0-96W24V-U</p> 
SPECIFICATIONS	
MAXIMUM LOAD	96W
INPUT VOLTAGE	120-277VAC
OUTPUT VOLTAGE	24VDC
DIMENSIONS	10.5" X 5.5" X 2"
CLASSIFICATION	CLASS 2 (TITLE 24 COMPLIANT)
DIMMING & CONTROLS	
RADIO RA2	•
HOMEWORKS QS	•
PHPM-3F-120	•
PHPM-3F-DV	•
BCI-0-10	•

REMOTE DISTANCE GUIDE FOR 24VDC, 200 WATT POWER SUPPLIES

DISTANC IN FEET	WIRE GAGE AWG
150'	#8 GAGE
100'	#10 GAGE
50'	#12 GAGE

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------