



SEED LIGHTING DESIGN CO., LTD.

喜得燈飾設計股份有限公司

喜的燈飾設計股份有限公司

73-31, Qionglin S. Rd., Xinzhuang District, New Taipei City 242

242 新北市新莊區瓊林南路73 - 31號

Tel. +866 2 2204 6650

info@seedlighting.com

www.SeedDesign.tw



Instagram: seeddesign_official

OLO Φ

PENDANT

Installation Manual


安裝使用說明書





WARNING!

SEED LIGHTING DESIGN CO., LTD. (hereafter “SEED”) guarantees the safety of the product (hereafter “Product(s)”) only if these instructions below are observed. Please retain the instructions:

1. Ensure that the power supply has been disconnected or switched OFF before installation of Product.
2. The Product MUST NOT be modified in any way. Any modification may turn the Product into dangerous status. SEED declines all responsibility for Products that are modified or tampered.
3. This warranty does not cover the surface of copper and brass (plating) parts, which can be easily affected by environmental factors and the level of maintenance based on their material characteristics, unless there is a loss of structural integrity on the parts.
4. There are individual differences in shape, weight, or surface texture among handcrafted objects (such as glass and cement), which are characteristics of handicraft.
5. If the lamp does not work normally, disconnect or unplug from the power supply, and reconnect again after 30 seconds to restore. If the lamp still fails to function, contact SEED or authorized dealers for assistance.
6. The light source CANNOT be replaced by the customer. Contact SEED for information if necessary.
7. The device carries no risk of photobiological emissions.
8. The symbol  shown on the Products or its packaging indicates that it must not be disposed of as household waste, but rather to be treated as recycled electronic equipments according to local city regulation.
9. SEED reserves the right to introduce all changes required for the improvement of the present product at any time and without prior notice.

CLEANING INSTRUCTIONS


- For all materials: clean off the dust on the surface gently by duster sheets or clean soft cloths.
- For resistant dirt: use dampened soft cloth with water and soap or mild cleanser to clean the luminaires. Use soft cloth to dry off the shade in case of water stain.
- For glass: take off the shade carefully and wash it by water with soap or mild cleanser. And dry off the shade in case of water stain.
- For concrete: wipe the entire shade with a dampened soft cloth to maintain original appearance evenly if necessary.

ATTENTION: Do NOT use alcohol or other solvents!

06


Assembly comleted!

安裝完成。

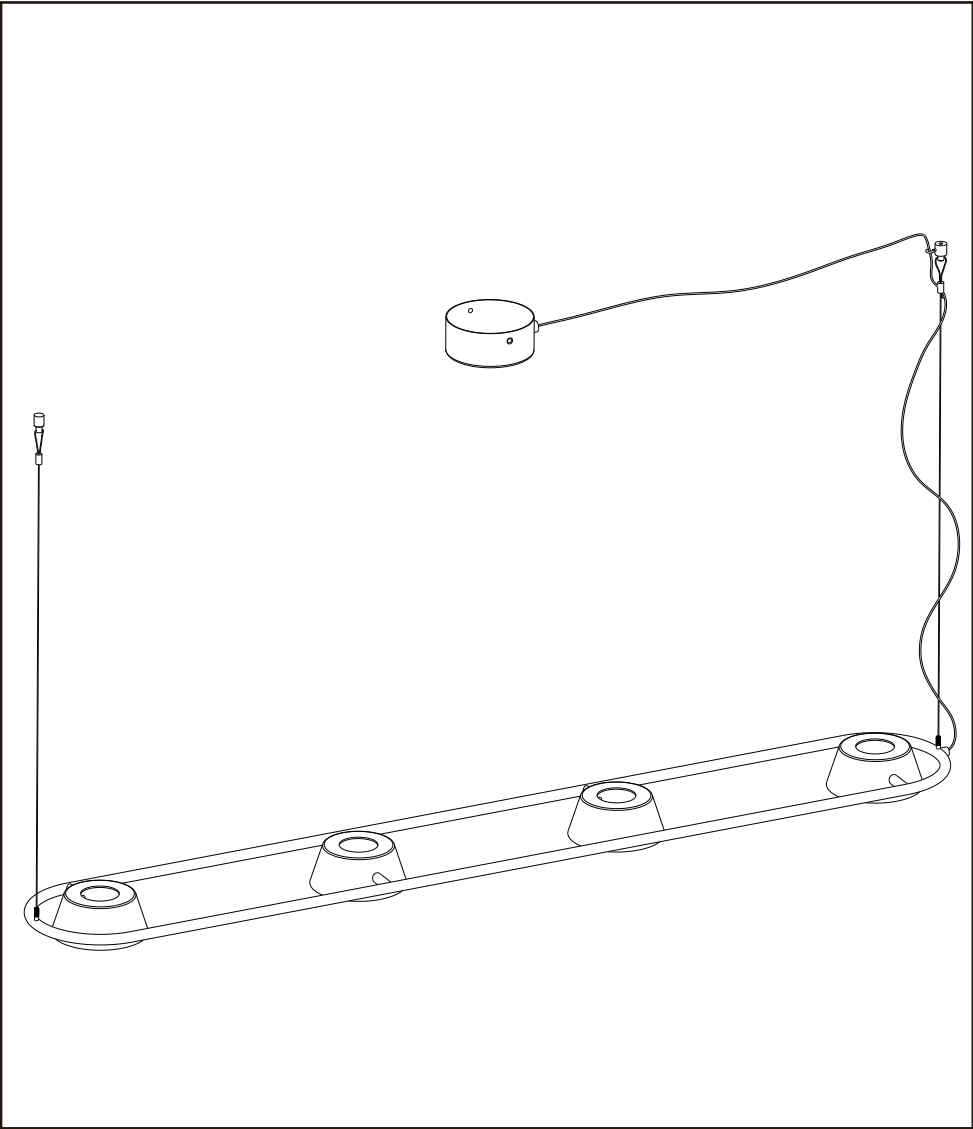

注意事項

喜得燈飾設計股份有限公司（以下簡稱「喜得」）在您正確遵守以下操作說明的情況下，方能保證燈具產品（以下簡稱「產品」）之安全，請務必遵循並妥善保管：

1. 安裝或組裝產品前，請確保電源供應關閉（OFF）或切斷電源連接。
2. 不得以任何方式修改產品，喜得拒絕承擔任何改裝後產品之保固責任。
3. 銅電鍍產品表面之斑點、保護漆細紋或顆粒等，為該材質自然氧化之特性，非產品瑕疵亦不影響功能，請安心使用。
4. 手工藝物件（例如玻璃、水泥）之間存在形狀、重量、表面紋理等個體差異，屬於手工藝之特色。
5. 燈具不亮或功能異常時，請關掉電源或拔除插頭，30秒後再重新通電作為重置設定。若未恢復正常，請聯絡喜得或其授權經銷商。
6. 不可自行更換此 LED光源，如有需求請聯絡喜得。
7. 本燈具不具有光生物輻射之風險。
8. 產品上標示有  符號，表示不得視作一般垃圾丟棄，而須根據當地規範，以電子產品等類別方式回收處理。
9. 喜得保留為產品進行任何產品優化所需之變更且無需提前通知之權利。






保養清潔方式


- 針對所有燈具表面：請用除塵紙或軟布輕輕拂去表面灰塵。
- 針對污漬：浸濕軟布並擰乾至不滴水狀態（水中可加入少許pH7.0之中性清潔劑），擦拭燈具，再以軟乾布輕輕揩乾避免殘留水漬。
- 針對玻璃：必要時，有些玻璃燈罩可從燈具上謹慎取下，以清水清洗（水中可加入少許pH7.0之中性清潔劑），再以軟乾布輕輕揩乾避免殘留水漬。
- 針對水泥：必要時，浸濕軟布並擰乾至不滴水狀態，以濕布擦拭整顆燈罩，以維持顏色一致性。

特別注意：請勿使用酒精、溶劑或其他酸鹼清潔劑！

ITEM LIST

Product 商品：OLO Φ PL4
Code 型號：SLD-130PL4
Light source 光源：LED 4 x Max.6.5W
Input Voltage 輸入電壓：120V ~ 60Hz

Parts 零件內容		
2		x2
6		x2
7		x1
8		x1
9		x2

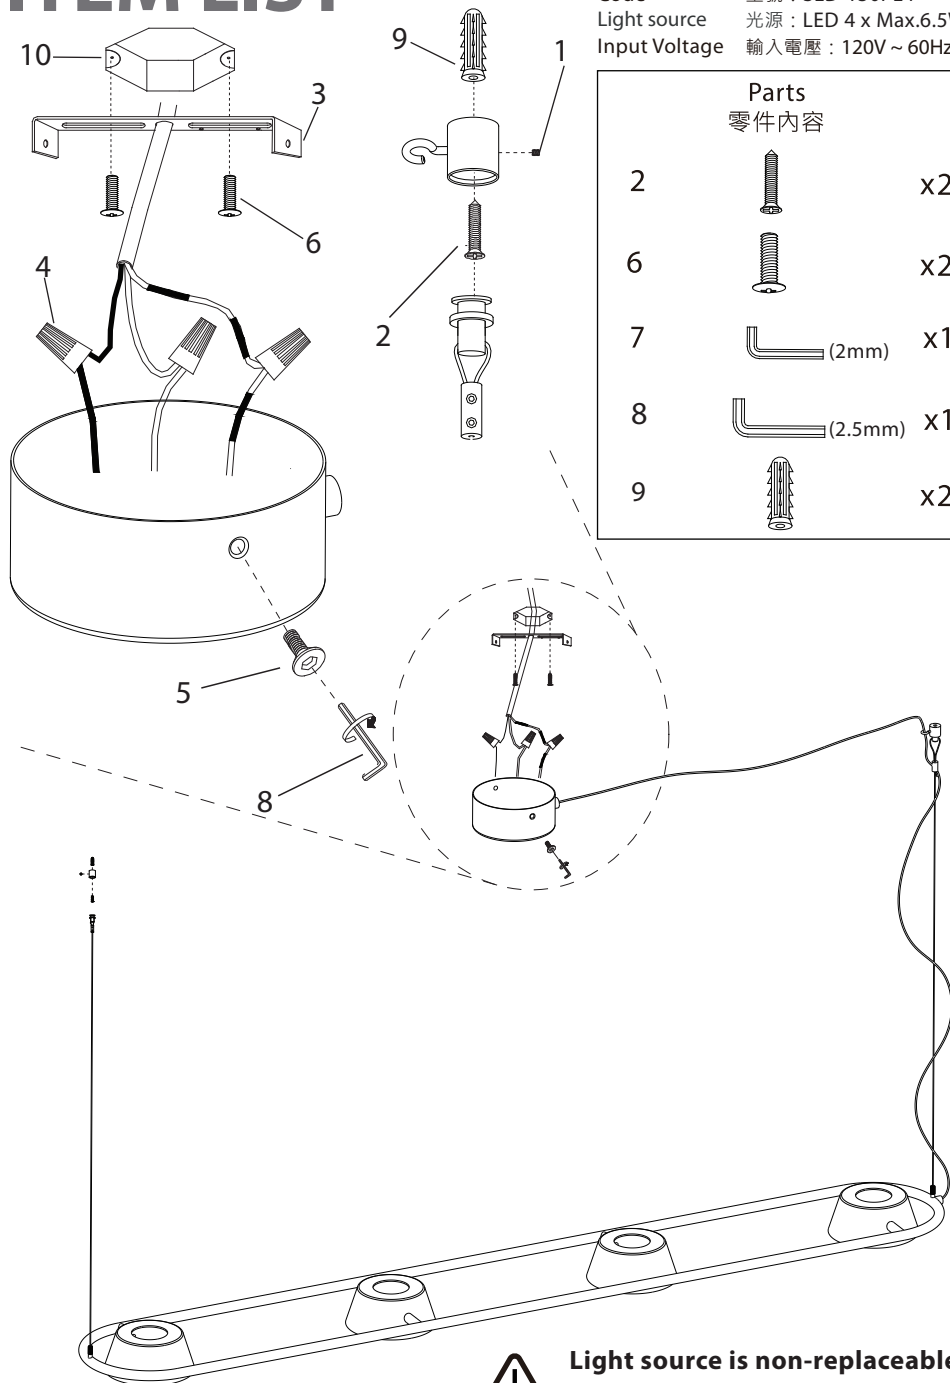


Light source is non-replaceable
此燈具光源不可替換

05

Adjust the cord and steel wires length on demand. Ensure the two steel wires hang the lamp body, and do **NOT** overtighten the cord.

根據高度需求，調整電線及鋼絲線長，並確保燈體重量落在鋼絲線上，電線不可拉過緊。

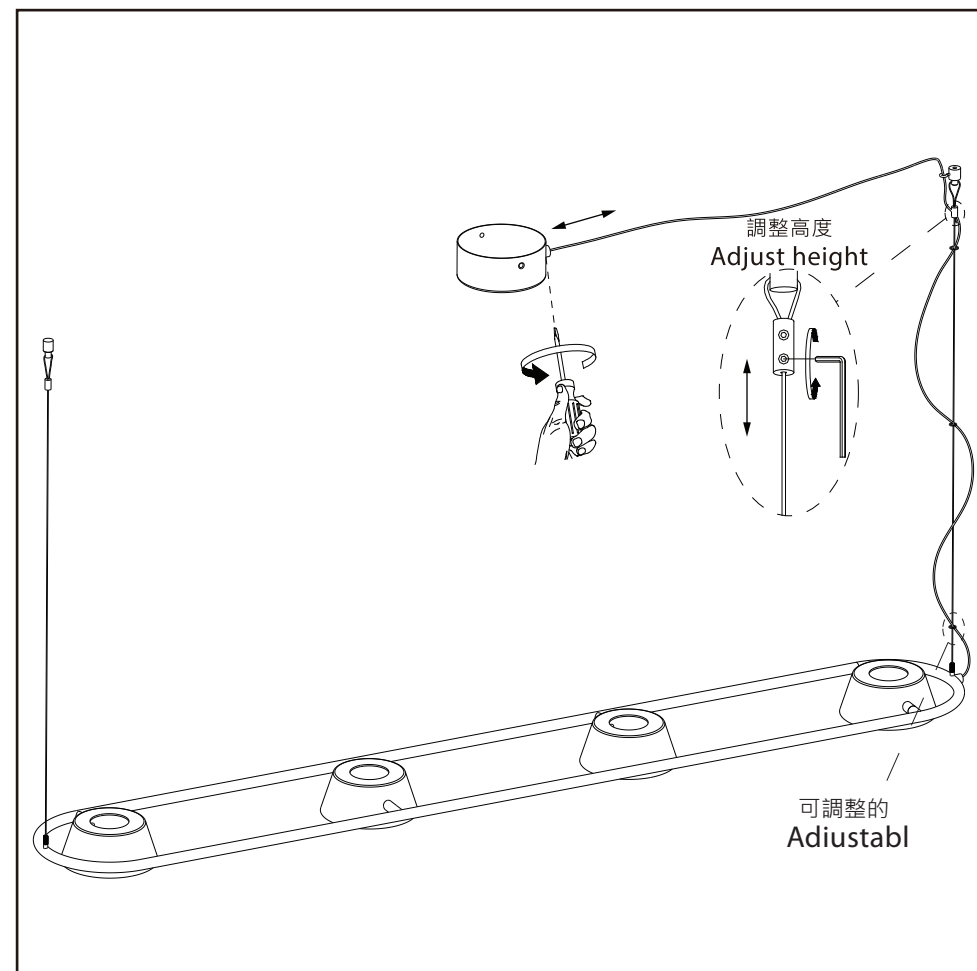

Ensure Power is switched off!


Connect the main supply cables to the corresponding cables on the light. And screw on the canopy.

* It is recommended that a qualified electrician connects the power in this step.

確認電源已關閉！


連接主電源線與燈具電源線，再裝上壁蓋並鎖緊。

*此步驟建議由合格電工操作。

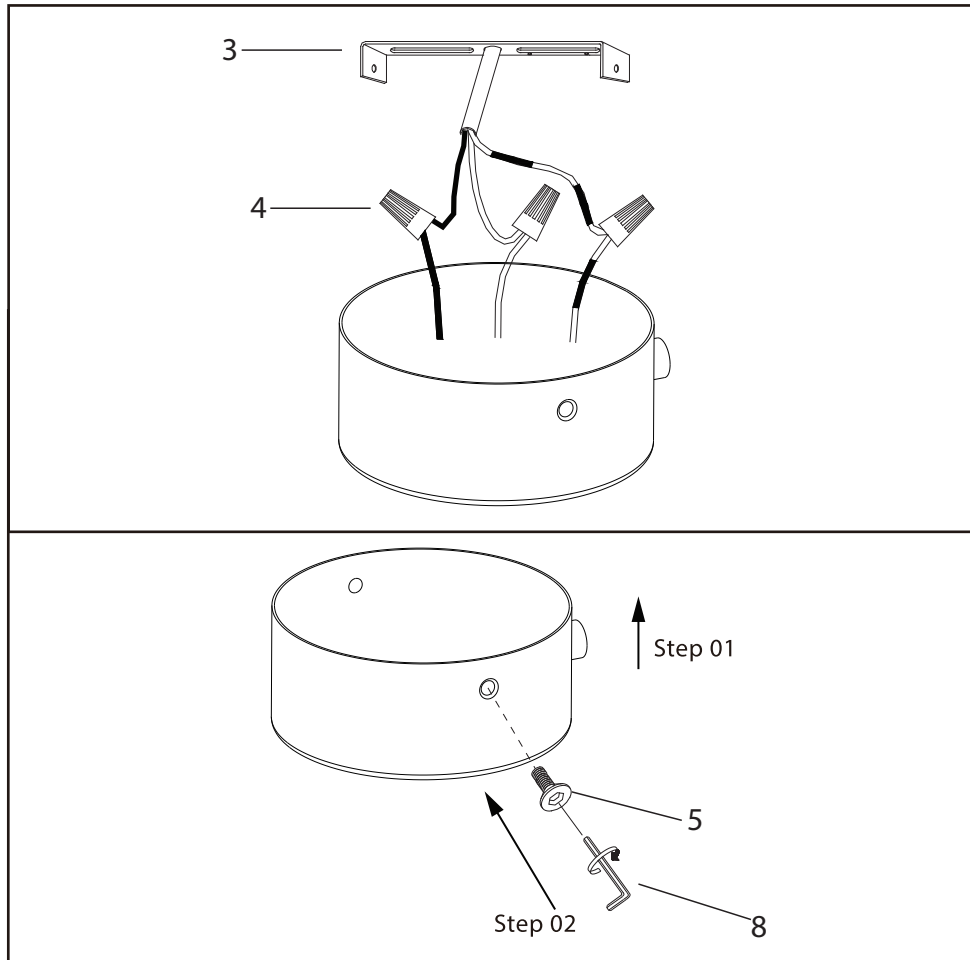

Screw the wire in the base of the frame.

安裝鋼絲線固定座。

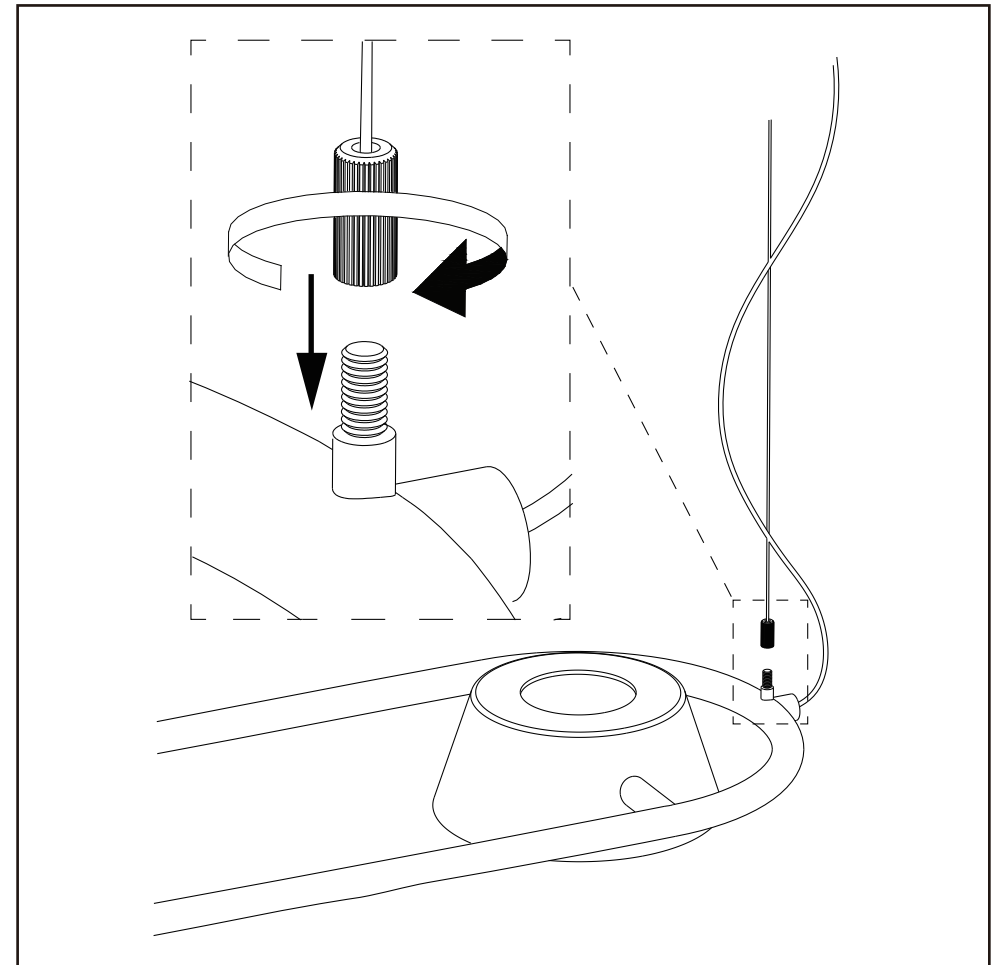


02

Take off the internal bracket from the canopy and the hanger bases from two steel wires. Fix the bracket and hanger base on the ceiling. The center distance between two hangers is 1336 mm / 52.6 inches.

*Ensure you use the correct type of wall plug for the material you are drilling into!

取下壁鐵及兩條鋼絲線之固定座，並將壁鐵及固定座鎖入欲安裝之天花板上
兩條鋼絲線之中心距為1336 mm / 52.6 英吋。

*請根據壁面材質，使用正確的牆塞。

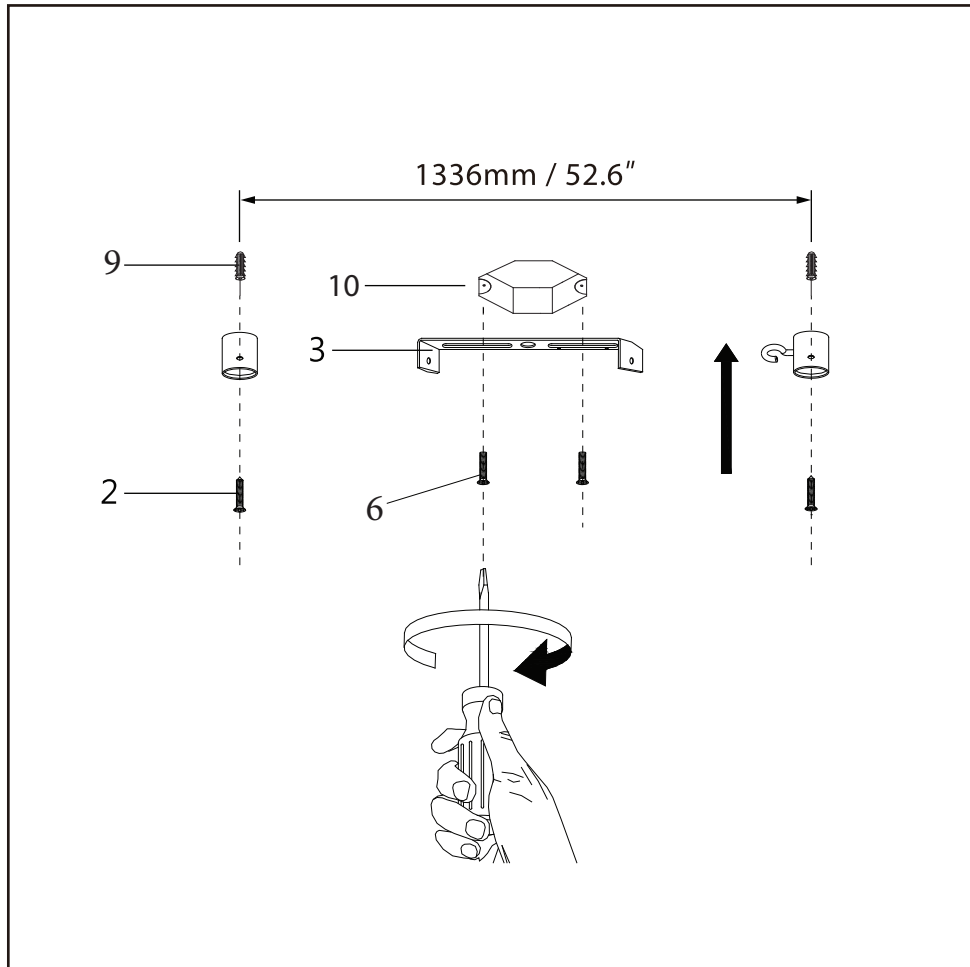

03

Screw the two steel wires in hanger bases, keep the two steel wires parallel.

將兩條鋼絲線鎖入固定座，確保兩條鋼絲線平行垂吊。

