

Alturas Chandelier

3124603, 3124605, 3124609 3124673, 3124675, 3124679 | 1.2

GENERATION LIGHTING CHANDELIER

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

SAVE THESE INSTRUCTIONS!

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

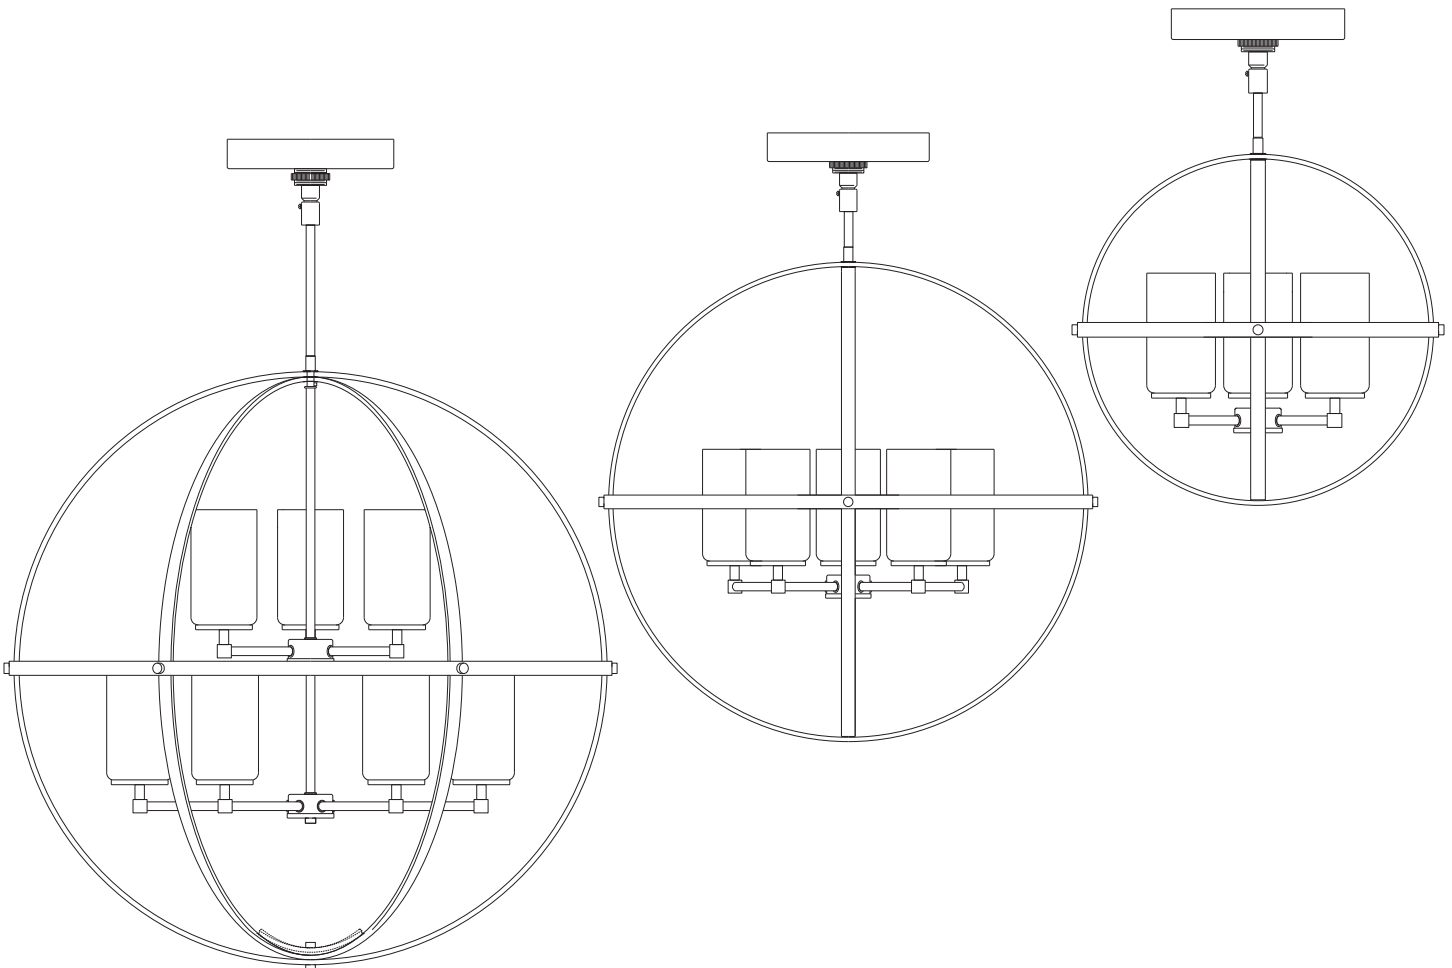


GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F 847.410.4500

www.generationlighting.com

Install the Fixture

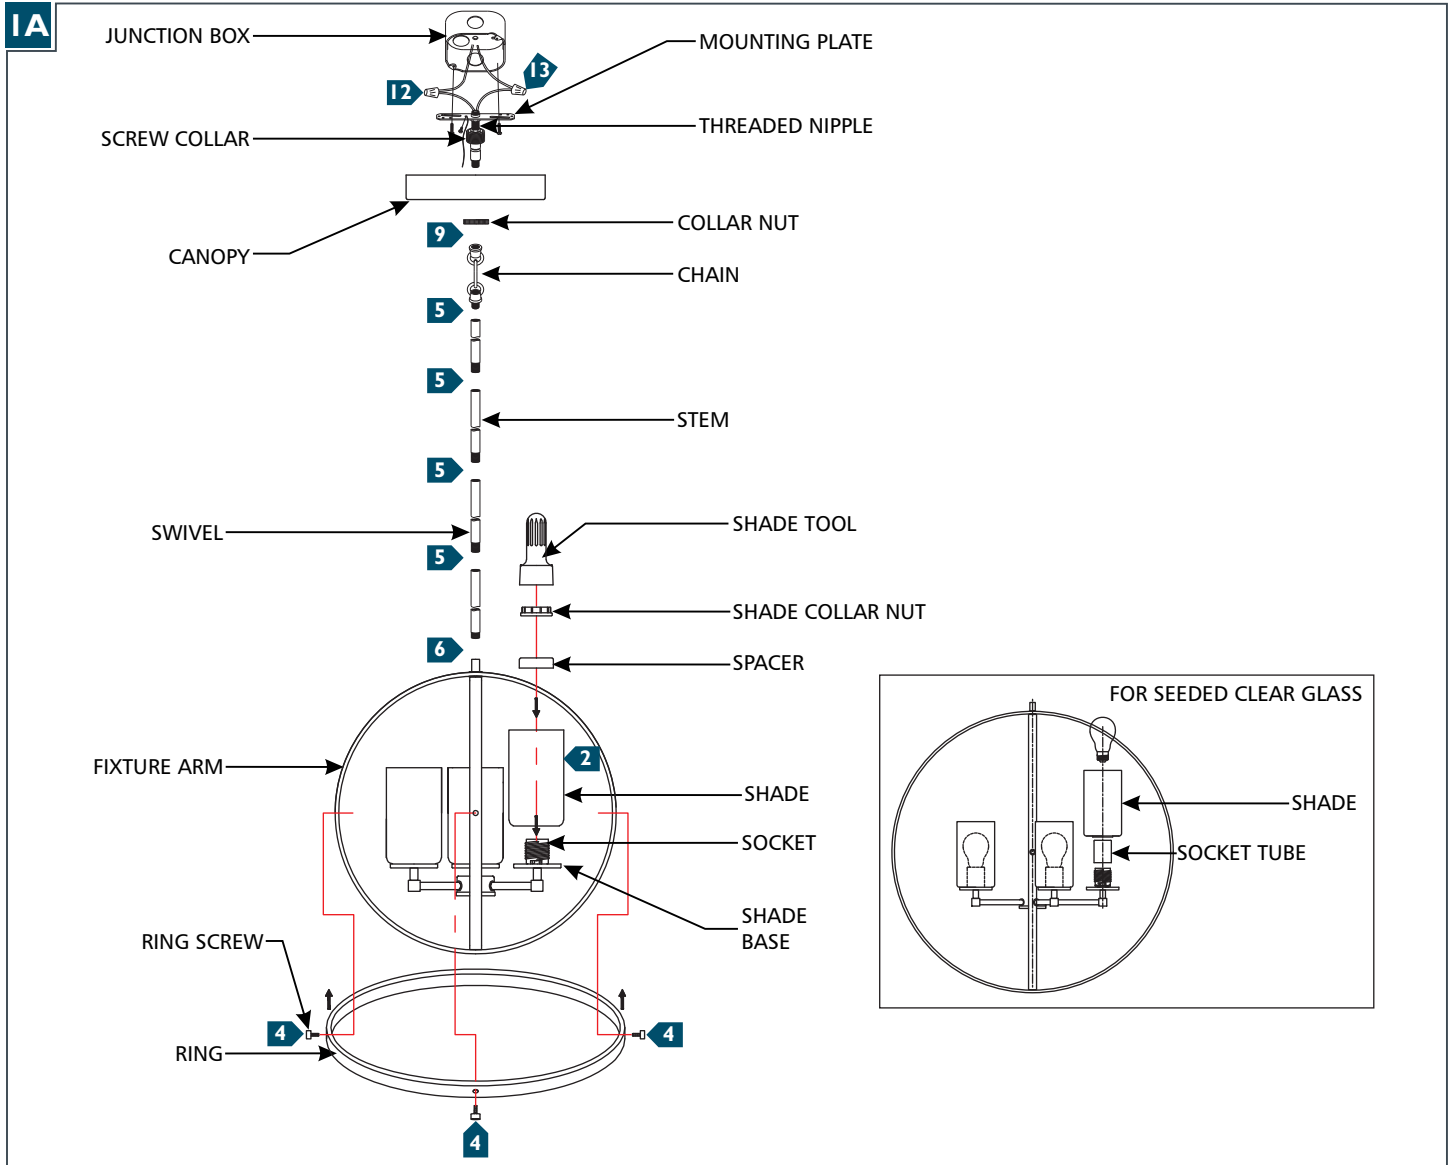

- 1** Spread the fixture arms until they are equally spaced apart.
- 2** (A. For fixtures with etched white glass): Place the shade and spacer onto the shade base and secure them in place by installing and tightly screwing the shade collar nut onto the socket using the shade tool; repeat for all shades.
(B. For fixtures with seeded clear glass): Place the socket tube onto the socket and then place the glass onto the shade base.
- 3** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- 4** Align the holes on the ring with the holes on the fixture arms and secure the ring in place with the ring screws.
- 5** Determine the wanted height or look of the fixture with the provided stems and/or chain and assemble them by screwing them together. All the parts may be used alone or used in combination.
- 6** Feed the fixture wires through the stems/chain and screw the assembly to the fixture.
- 7** Unscrew the collar nut off the screw collar and place it onto the stem/chain followed by the canopy.
- 8** If necessary, screw the threaded nipple tightly onto the mounting plate.
- 9** Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the stem/chain assembly.
- 10** Align and secure the mounting plate to the junction box.
- 11** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 12** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 13** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 14** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.