

Ebell Small & Medium Flush Mount

700FMEBL6_, 700FMEBL10_ 1.0



FLUSH

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is suitable for damp locations.

This product can be dimmed with most ELV or TRIAC dimmers.



This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

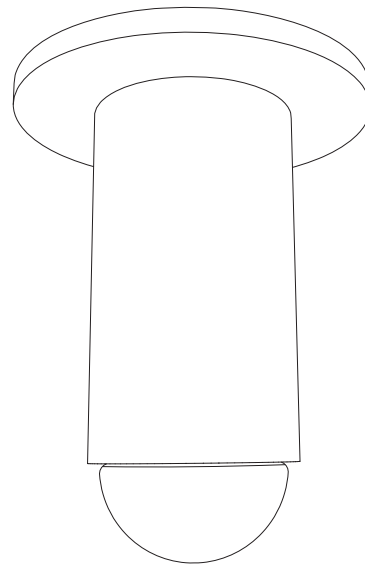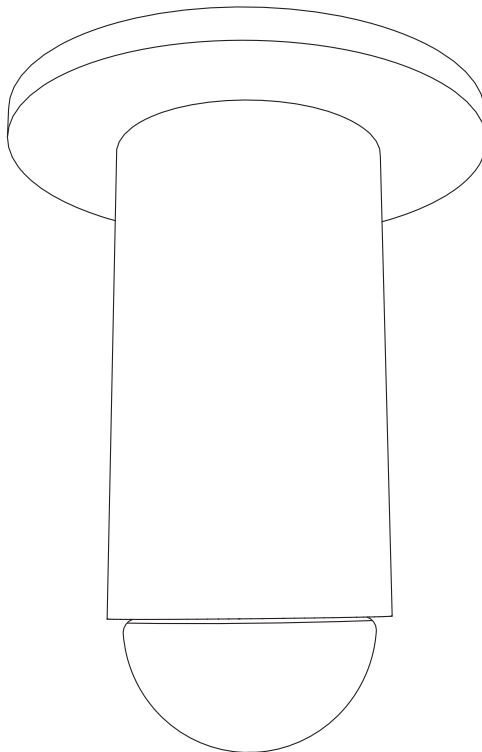

7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.techlighting.com

Install the Fixture

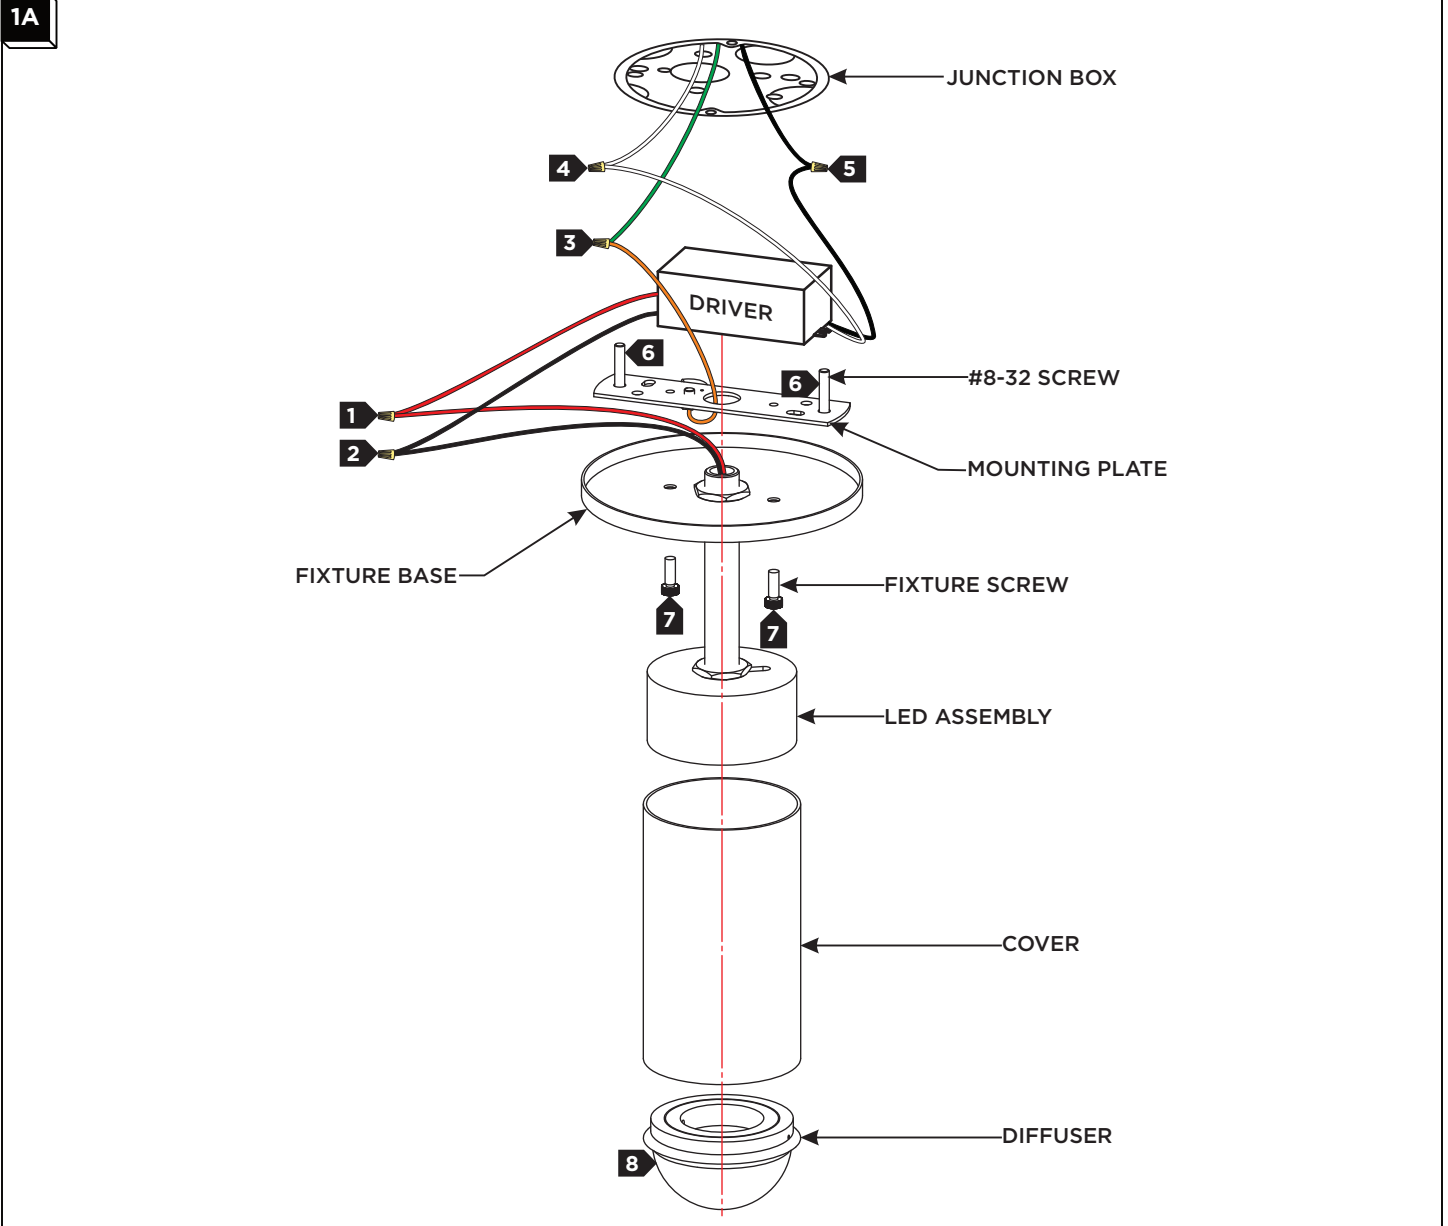

- 1** Connect the red driver wire to the red fixture wire with a wire nut.
- 2** Connect the black driver wire to the black fixture wire with a wire nut.
- 3** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4** Connect the white driver wire to the neutral power line with a wire nut.
- 5** Connect the black driver wire to the hot power line with a wire nut.
- 6** Properly place the driver, all wires, and wire nut connections into the junction box, secure the mounting plate to the junction box with the provided #8-32 screws.
- 7** Secure the fixture base to the mounting plate using the fixture screws.
- 8** Install the cover to the LED assembly and secure it in place by screwing the diffuser to the LED assembly.