

Wyatt Large Flush Mount

700FMWYT_ 1.0



FLUSH

GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is suitable for damp locations.

120V dimmable with most LED compatible ELV and TRIAC dimmers.

This instruction shows a typical installation.


CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

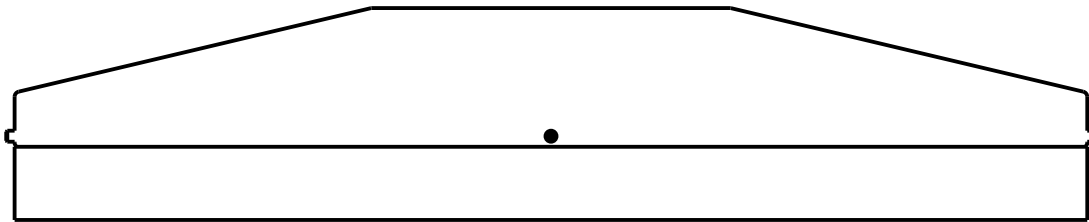

7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.techlighting.com

Install the Fixture

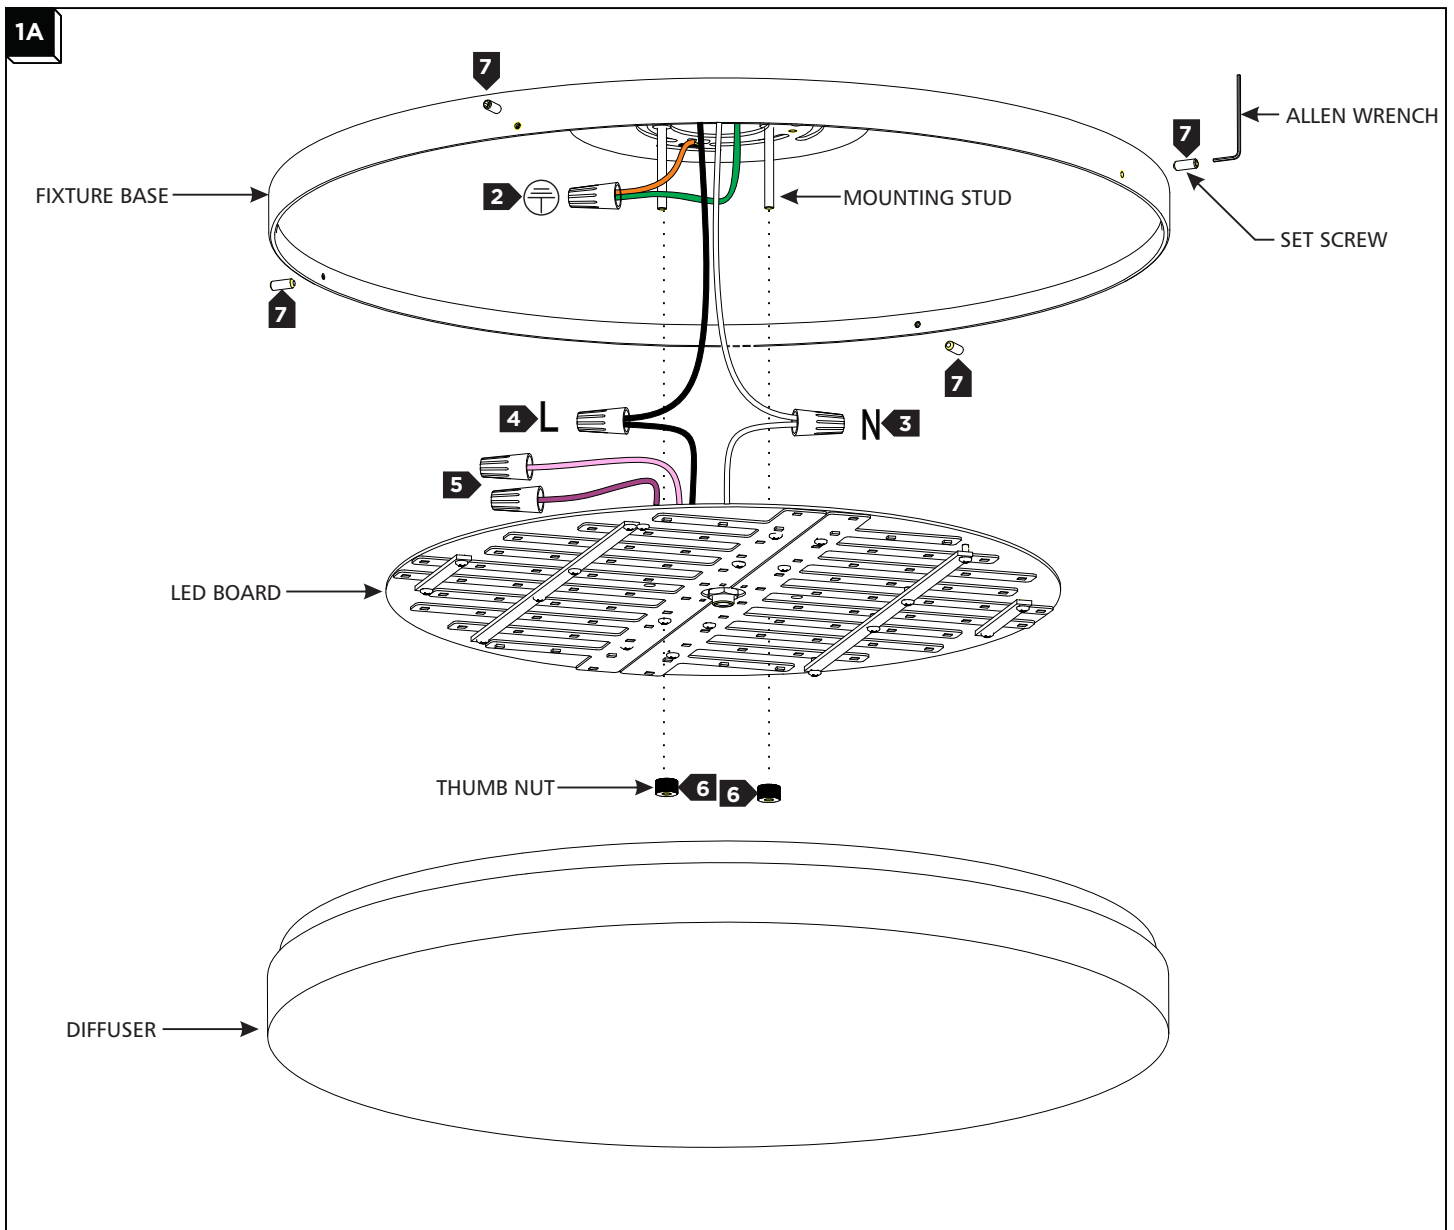

- 1 Install the fixture base to the electrical box with the two provided #8-32 screws.
- 2 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3 Connect the white input driver wire to the neutral power line wire with a wire nut.
- 4 Connect the black input driver wire to the hot power line wire with a wire nut.
- 5 If using 0-10V dimming, connect the purple and pink/grey wires to a compatible dimmer. If not using 0-10V dimming, cap off the purple and gray wires.
- 6 Properly place the wires and wire nut connections into the junction box, align the holes on the LED board to mounting studs on the fixture base and slide it into place, finally secure the LED board into place by screwing the two thumb nuts onto the mounting studs.
- 7 Install the diffuser onto the fixture base and secure it place by tightening the four set screws using the provided Allen wrench.