

Crosby Medium Wall**700WSCRBY_****1.0****GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.


This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

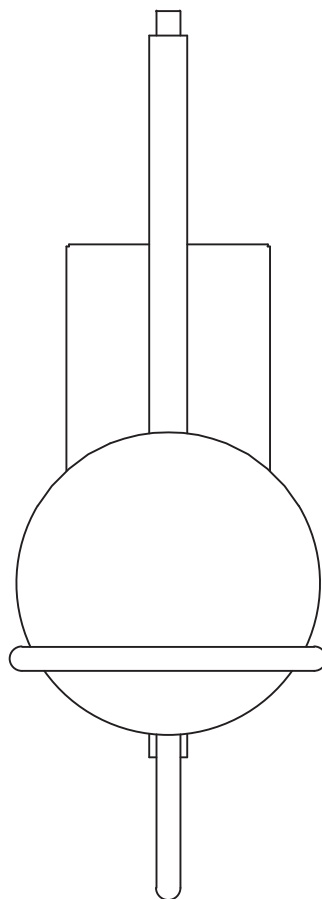

7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.techlighting.com

Install the Fixture

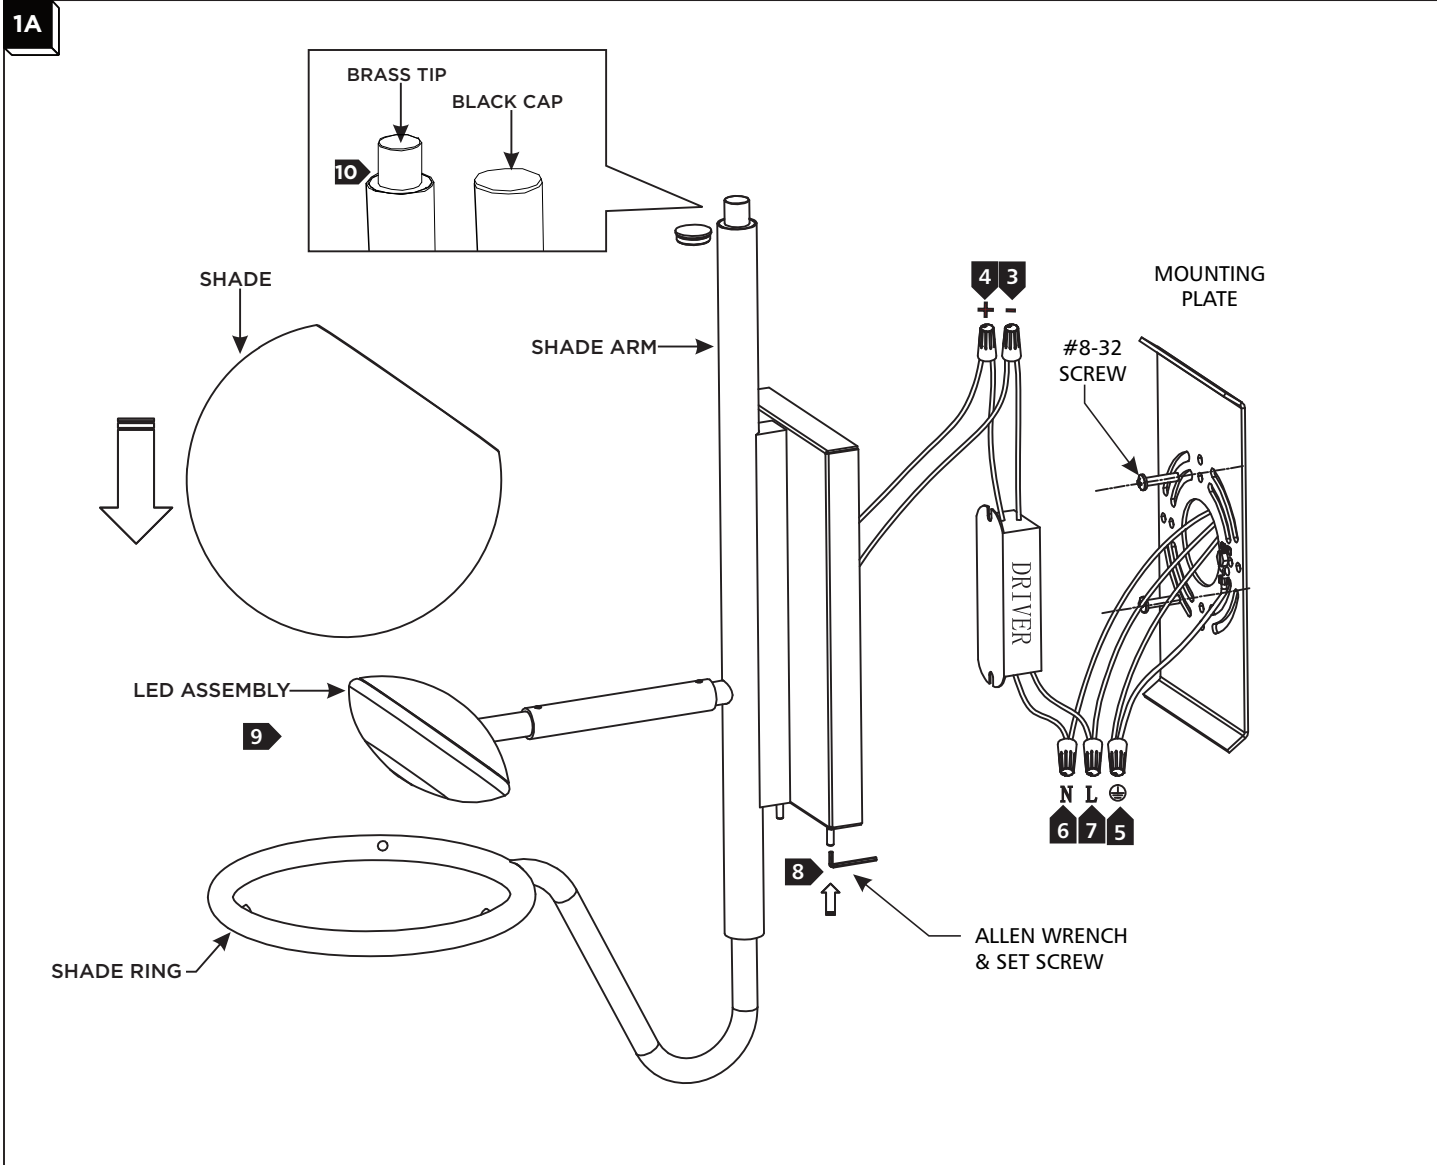

- 1 With the provided Allen wrench, loosen (do not remove) the set screws on the fixture base.
- 2 Remove the mounting plate from the fixture base and secure it to the junction box with the two provided #8-32 screws.
- 3 Connect the negative (-) fixture wire to the negative (-) driver input wire with a wire nut.
- 4 Connect the positive (+) fixture wire to the positive (+) driver input wire with a wire nut.
- 5 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 6 Connect the white driver output wire to the neutral power line with a wire nut.
- 7 Connect the black driver output wire to the hot power line with a wire nut.
- 8 Properly place the driver, all wires, and wire nut connections into the fixture/junction box, mount the fixture base onto the mounting plate and secure it in place by tightening the set screws using the provided Allen wrench.
- 9 Install the shades onto the LED assemblies and place them securely in the shade ring.
- 10 The brass tip on top of the shade arms may be replaced with the black caps if desired.