

WALL

GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.

Dimmable with most LED compatible ELV, TRIAC and 0-10V dimmers.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.


SAVE THESE INSTRUCTIONS!

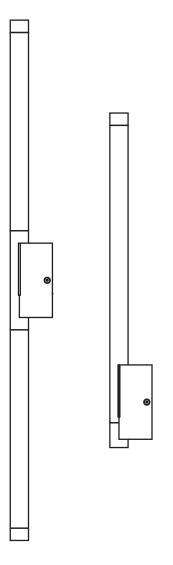

TECH LIGHTING

7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500 www.techlighting.com

Install the Fixture

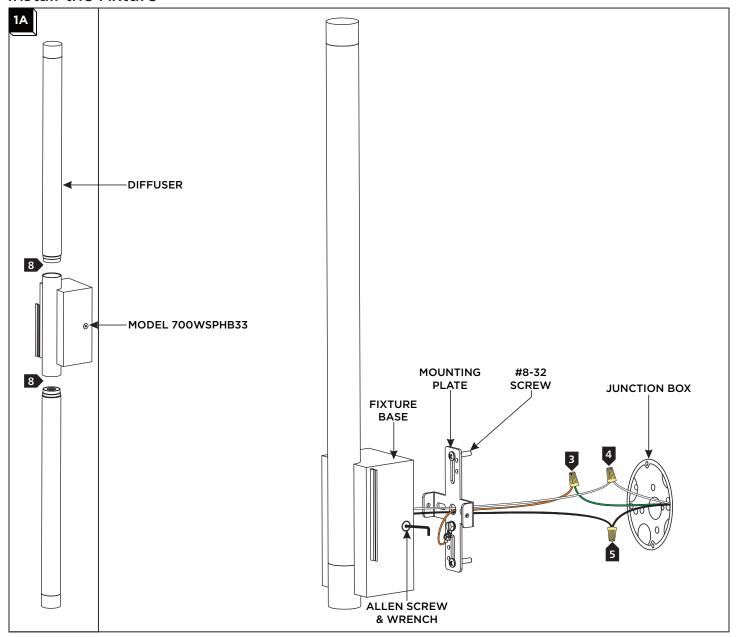

- 1) With the provided Allen wrench, loosen (do not remove) the set screw on the fixture base.
- 2 Remove the mounting plate from the fixture base.
- Connect the fixture to a suitable ground in accordance with local electrical codes.
- Connect the white input driver wire to the neutral power line with a wire nut.
- 5 Connect the black input driver wire to the hot power line with a wire nut.
- 6 Properly place all wires and wire nut connections into the junction box and install the mounting plate to the junction box with the two #8-32 screws provided.
- 7 Mount the fixture base onto the mounting plate, and secure it in place by tightening the set screws using the provided Allen wrench.
- 8 Model 700WSPHB33 Only: Screw the diffusers to the fixture.