

3" LED

WALL WASH



SMALL APERTURE LED WALL WASH WITH ARCHITECTURAL APPEARANCE. LED MODULE IS MODULAR FOR EASE OF REPLACEMENT. TRIM ANGLED WITH FROSTED LINEAR SPREAD LENS WHICH CREATES CONSISTENT AND EVEN HORIZONTAL AND VERTICAL ILLUMINATION. LED COMES FACTORY POSITIONED FOR OPTIMAL PERFORMANCE AND DISTRIBUTION.

LAMPING & OPTICS

- LED comes factory positioned for optimal performance and light distribution
- High Output:
 - 1500/1200 net lumens at 3000K (80 CRI/90 CRI)
 - 83/67 net lumens per watt at 3000K (80 CRI/90 CRI)
- Low Output:
 - 1000/800 net lumens at 3000K (80 CRI/90 CRI)
 - 83/67 net lumens per watt at 3000K (80 CRI/90 CRI)
- 2700K, 3000K, 3500K with 3-step color binning

POWER / POWER SUPPLY

- High Output Consumes 18 watts, Low Output Consumes 12 watts
- Constant current driver with +.9 power factor and +80% efficiency
- Dimmable with ELV or incandescent dimmer to 2%-15% depending on dimmer; see element-lighting.com for compatibility
- Optional Lutron Hi-Lume™ driver offers 1% dimming
 - HL2W/PWM – Two wire low-voltage electronic dimming
 - HL3W/ECO – Three wire dimming of Lutron Eco-System®
- Optional 0-10V dimming
- Consult Quotes Dept for alternate or custom driver selections

TRIMS

- Trim is angled with frosted linear spread lens to create consistent horizontal and vertical illumination
- Die cast aluminum with minimal thickness
- Available in flanged or flangeless ceiling appearance
- White can be field painted to match adjacent finishes
- Accommodates up to 1" ceiling thickness (flanged)

HOUSING

- IC/Non-IC/Chicago Plenum: 11.5" x 17.5" x 6"
- Constructed of heavy gauge cold rolled steel with durable matte black powder coat finish
- 3-7/8" ceiling opening
- Includes integral junction box approved for branch circuit through wiring
- ETL listed. Damp listed. Shower version wet listed.

Visit www.element-lighting.com for full photometrics.

GENERATION BRANDS



2015 Tech Lighting, L.L.C. All rights reserved. The "Element" graphic is a registered trademark of Element. Element reserves the right to change specifications for product improvements without notification.

ELEMENT
by Tech Lighting®

7400 Linder Avenue, Skokie, Illinois 60077 T 847.410.4400 F 847.410.4500

3" LED

WALL WASH

TRIMS

ROUND



FLANGELESS WALL WASH

SQUARE



FLANGELESS WALL WASH



FLANGED WALL WASH



FLANGED WALL WASH

FINISH



ANTIQUE BRONZE



BLACK




SATIN NICKEL



WHITE (PAINTABLE)

3" HOUSING

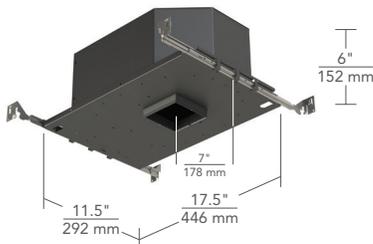

IC / NON-IC / CHICAGO PLENUM

3" LED

WALL WASH

GRIDS

HOUSING

PRODUCT SERIES	CEILING APPEARANCE	FUNCTION	LAMP	HOUSING RATING	DRIVER	VOLTAGE
E3R ELEMENT 3" ROUND	L FLANGELESS F FLANGED	W WALL WASH	-LH827 80 CRI, 2700K, HIGH OUTPUT† -LH830 80 CRI, 3000K, HIGH OUTPUT†	I IC AIRTIGHT N NON-IC AIRTIGHT		STANDARD ELV (LEAVE BLANK) 120 VOLT (LEAVE BLANK)
E3S ELEMENT 3" SQUARE			-LH835 80 CRI, 3500K, HIGH OUTPUT† -LH927 90 CRI, 2700K, HIGH OUTPUT† -LH930 90 CRI, 3000K, HIGH OUTPUT† -LH935 90 CRI, 3500K, HIGH OUTPUT† -LO827 80 CRI, 2700K, LOW OUTPUT -LO830 80 CRI, 3000K, LOW OUTPUT -LO835 80 CRI, 3500K, LOW OUTPUT -LO927 90 CRI, 2700K, LOW OUTPUT -LO930 90 CRI, 3000K, LOW OUTPUT -LO935 90 CRI, 3500K, LOW OUTPUT	C CHICAGO PLENUM	-HL2W/PWM -HL3W/ECO -010	LUTRON HI-LUME 240 VOLT LUTRON HI-LUME 277 VOLT DIMMING* LUTRON HI-LUME 3 WIRE OR ECO-SYSTEM DIMMING 0-10V DIMMING
		W	-			

TRIMS ARE REQUIRED AND MUST BE ORDERED SEPARATELY. †HIGH OUTPUT HI-LUME OPTIONS ONLY AVAILABLE IN CHICAGO PLENUM HOUSING. HI-LUME NOT COMPATIBLE WITH ROUND FLANGELESS HOUSING. *HL2W/PWM - TWO WIRE LOW-VOLTAGE ELECTRONIC DIMMING, 120 VOLT ONLY.

TRIM

PRODUCT SERIES	CEILING APPEARANCE	FUNCTION	FINISH	-LED
E3R ELEMENT 3" ROUND	L FLANGELESS F FLANGED	W WALL WASH	-Z ANTIQUE BRONZE -B BLACK	-LED
E3S ELEMENT 3" SQUARE			-S SATIN NICKEL -W WHITE	
		W	-	-LED

PROJECT INFO

FIXTURE TYPE _____

FIXTURE QUANTITY _____

JOB NAME _____

NOTES _____

