

Understated modern design characterizes Tegel outdoor LED wall sconces. Providing well-controlled up and down lighting, or down light only, these wall sconces provide accent and ambient illumination. The option of three finish choices ensures this design profile successfully blends with all architectural aesthetics.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

Up light and down light options, with 10° and 36° beam spread options

SPECIFICATIONS

DELIVERED LUMENS	2346 Up-Downlight / 1212 Downlight
WATTS	29.2 Up-Downlight / 15.6 Downlight
VOLTAGE	Universal 120V-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric Up/Down Lighting, or Down Only
MOUNTING OPTIONS	Wall
OPTICS	10° and 36°
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	Up-Downlight B1-U5-G0 / Downlight B1-U0-G0
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



TEGEL 12
shown in bronze



TEGEL 12
shown in charcoal




TEGEL 12
shown in gray

ORDERING INFORMATION

700OWTEG	CRI/CCT	LENGTH	BEAM SPREAD*	LENS	FINISH	FUNCTION	VOLTAGE	OPTIONS
	830 80 CRI, 3000K	12 12"	N 10° NARROW	C CLEAR	Z BRONZE	DO DOWNLIGHT ONLY	UNV 120V-277V	NONE
	840 80 CRI, 4000K		W 36° WIDE		H CHARCOAL	UD UPLIGHT/DOWNLIGHT		PC BUTTON PHOTOCONTROL
			NN 10° UP AND DOWN		Y GRAY			LF IN-LINE FUSE
			WW 36° UP AND DOWN					SP SURGE PROTECTION
			NW 10° AND 36°					PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE
								PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION
								LFSP IN-LINE FUSE & SURGE PROTECTION
								PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION

*N, W = DOWNLIGHT ONLY (DO); NN, WW, NW = UP AND DOWNLIGHT ONLY (UD)

TEGEL 12 WALL SCONCE

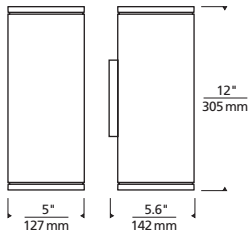

Tegel 12

PHOTOMETRICS*



*For latest photometrics, please visit www.techlighting.com/OUTDOOR

TEGEL 12 UP/DOWN

Total Lumen Output: 2346
 Total Power: 29.2
 Luminaire Efficacy: 80.2
 Color Temp: 3000K
 CRI: 80+
 BUG Rating: B1-U5-G0

TEGEL 12 DOWN

Total Lumen Output: 1212
 Total Power: 15.6
 Luminaire Efficacy: 77.7
 Color Temp: 3000K
 CRI: 80+
 BUG Rating: B1-U0-G0

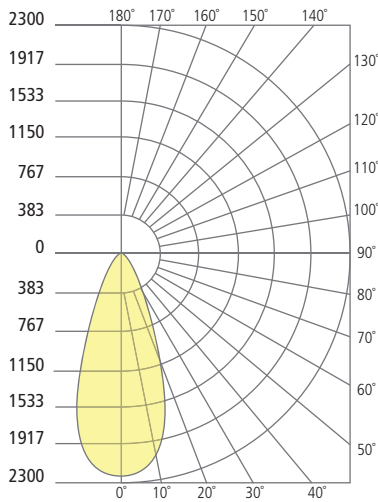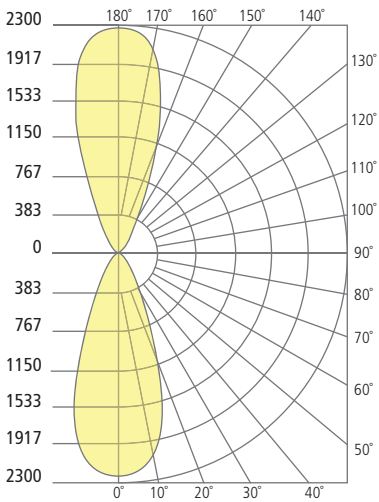

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS
 7400 Linder Avenue, Skokie, Illinois 60077
 T 847.410.4400 F 847.410.4500

Understated modern design characterizes Tegel outdoor LED wall sconces. Providing well-controlled up and down lighting, or down light only, these wall sconces provide accent and ambient illumination. The option of three finish choices ensures this design profile successfully blends with all architectural aesthetics.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

Up light and down light options, with 10° and 36° beam spread options

SPECIFICATIONS

DELIVERED LUMENS	2419 Up-Downlight / 1212 Downlight
WATTS	29.9 Up-Downlight / 15.6 Downlight
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric Up/Down Lighting, or Down Only
MOUNTING OPTIONS	Wall
OPTICS	10° and 36°
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	Up-Downlight B1-U5-G0 / Downlight B1-U0-G0
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



TEGEL 18
shown in bronze

TEGEL 18
shown in charcoal


TEGEL 18
shown in gray

ORDERING INFORMATION

700OWTEG	CRI/CCT	LENGTH	BEAM SPREAD*	LENS	FINISH	FUNCTION	VOLTAGE	OPTIONS
	830 80 CRI, 3000K	18 18"	N 10° NARROW	C CLEAR	Z BRONZE	DO DOWNLIGHT ONLY	UNV 120V-277V	PC NONE
	840 80 CRI, 4000K		W 36° WIDE		H CHARCOAL	UD UPLIGHT/DOWNLIGHT		BF BUTTON PHOTOCONTROL
			NN 10° UP AND DOWN		Y GRAY			LF IN-LINE FUSE
			WW 36° UP AND DOWN					SP SURGE PROTECTION
			NW 10° AND 36°					PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE
								PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION
								LFSP IN-LINE FUSE & SURGE PROTECTION
								PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION

*N, W = DOWNLIGHT ONLY (DO); NN, WW, NW = UP AND DOWNLIGHT ONLY (UD)

TEGEL 18 WALL SCONCE

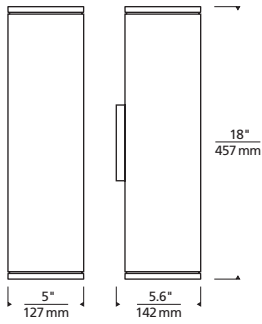

Tegel 18

PHOTOMETRICS*


*For latest photometrics, please visit www.techlighting.com/OUTDOOR

TEGEL 18 UP/DOWN


Total Lumen Output: 2419
 Total Power: 29.9
 Luminaire Efficacy: 80.6
 Color Temp: 3000K
 CRI: 80+
 BUG Rating: B1-U5-G0

TEGEL 18 DOWN

Total Lumen Output: 1212
 Total Power: 15.6
 Luminaire Efficacy: 77.7
 Color Temp: 3000K
 CRI: 80+
 BUG Rating: B1-U0-G0

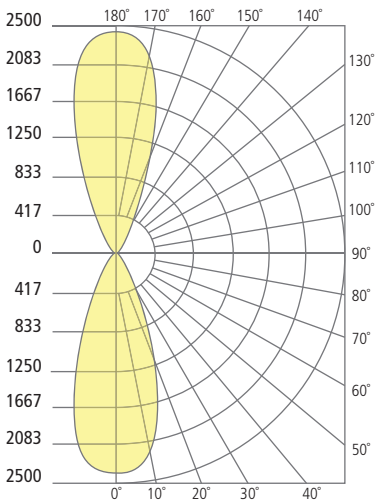

Up-downlight

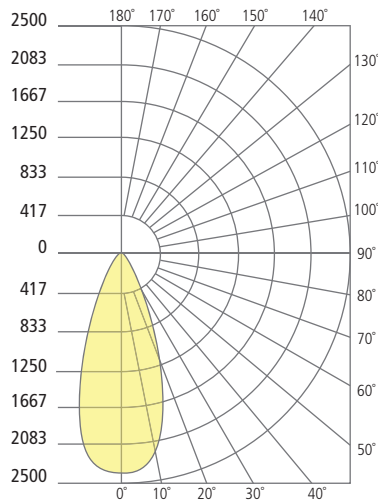

Downlight

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS
 7400 Linder Avenue, Skokie, Illinois 60077
 T 847.410.4400 F 847.410.4500