

Exhibiting a modern, Zen-like design approach, the Syntra outdoor path light blends seamlessly into contemporary architecture and landscapes. The symmetric down lighting provides abundant outdoor illumination and the clean, angular aesthetic maintains an understated elegance.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

Path light features either Bolt or Stake mounting options

SPECIFICATIONS

DELIVERED LUMENS	256
WATTS	12.8
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Bolt or Stake
CCT	3000K
CRI	80+
COLOR BINING	3 Step
BUG RATING	B0-U1-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



SYNTRA PATH
shown in bronze



SYNTRA PATH
shown in charcoal

TRANSFORMERS*


(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
700OT150T	OTDR, MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
700OT150T277	OTDR, MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
700OT300T	OTDR, MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC
700OT300T277	OTDR, MAGNETIC, 300W, 277V	STAINLESS STEEL	MAGNETIC


ORDERING INFORMATION

700OASYN	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
830	80 CRI, 3000K	18 18"	D DIFFUSE	Z BRONZE H CHARCOAL	12 12V	S SYMMETRIC	NONE ST STAKE MOUNTING KIT



*12V TRANSFORMER ORDERED SEPARATELY.



Syntra Path

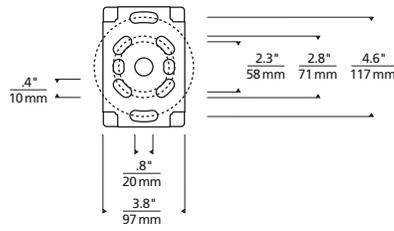

Anchor Plate Bolt Pattern




Stake Anchor

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

SYNTRA PATH

- Total Lumen Output: 256
- Total Power: 12.8
- Luminaire Efficacy: 19.8
- Color Temp: 3000K
- CRI: 80+
- BUG Rating: B0-U1-G0

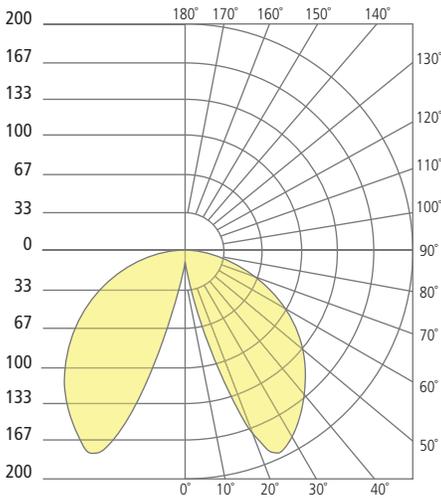

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES
