

The Ash outdoor pendant is a modern take on the classic industrial-style light fixture. The Ash features a sleek metal shade and clear diffuser that creates a column of diffused light from under the shade. Ash pendants feature energy-efficient, fully dimmable integrated LED lamping. Available in two finishes: Bronze and Charcoal.

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized acrylic lensing
- IP-65 Rated

SPECIFICATIONS

DELIVERED LUMENS	540 or 1115 with clear cylinder 400 or 863 with clear lens
WATTS	8 or 18
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Ceiling
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	N/A
DARK SKY	Compliant (Lensed version only)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.




ASH PENDANT
shown in charcoal/clear cylinder



ASH PENDANT
shown in bronze/clear lens

ORDERING INFORMATION

700PASH	CRI / CCT	LENS	FINISH	VOLTAGE
L927	LED LO-OUTPUT 90 CRI, 2700K	C CLEAR CYLINDER	Z BRONZE	UNV 120V-277V UNIVERSAL
H927	LED HI-OUTPUT 90 CRI, 2700K	D CLEAR DOME	H CHARCOAL	
L930	LED LO-OUTPUT 90 CRI, 3000K			
H930	LED HI-OUTPUT 90 CRI, 3000K			

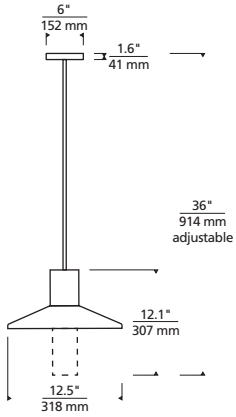

Ash Pendant

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

ASH 16

- Total Lumen Output: 540 or 1115
- Total Power: 8 or 18
- Luminaire Efficacy: 67.5 or 62
- Color Temp: 2700K or 3000K
- CRI: 90
- BUG Rating: N/A

PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES