Mezz Pendant




GENERAL PRODUCT INFORMATION:




This product is ETL listed and suitable only for indoor dry locations and approved for use at any height above the finished floor.

Adjust The Fixture Height




Back out (do not remove) the set screw on tip of the connector with the provided Allen wrench.

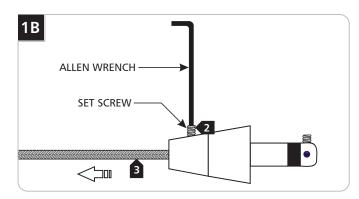


2 Back out (do not remove) the set screw on the conical connector with the provided Allen wrench.

3 Pull the coaxial cable out.


1.0

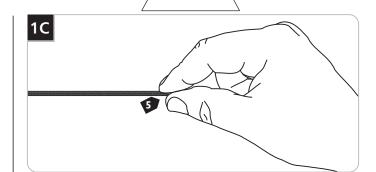


- 4 Cut the coaxial cable to the desired length.
- **5** Gently twist the end of the coaxial cable between thumb and forefinger.

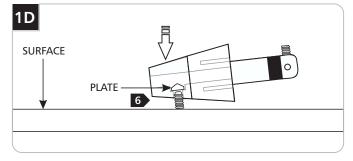


Tap the conical connector on a hard surface with the set screw facing down, so the plate inside drops into place.

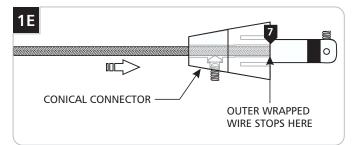

Feed and push the coaxial cable into the conical connector. The coaxial cable will come to a stop point after being inserted 3/4" into the conical connector.

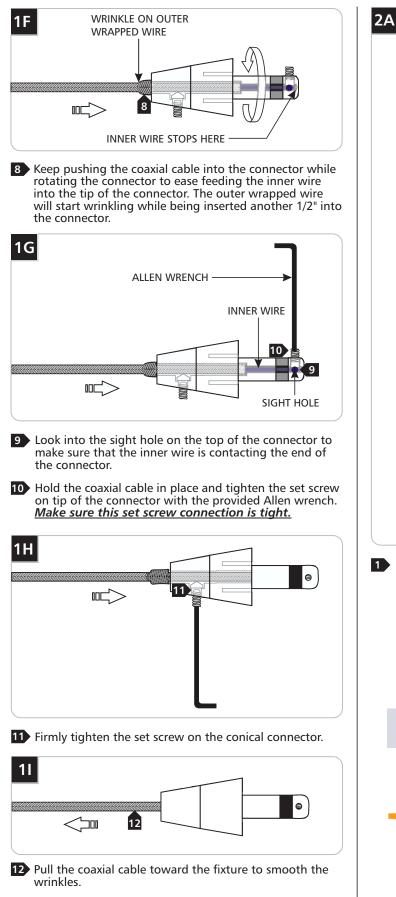

Assemble the Fixture

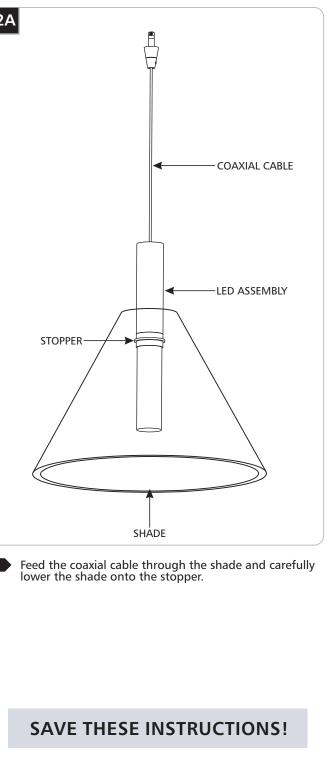



TECHLIGHTING[®]