

LOW-VOLTAGE PENDANTS

Cabo Pendant



DESCRIPTION

Onyx cylinder provides a warm textured look. Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt replaceable 500 lumen 80 CRI 3000K LED SORAAA® module and six feet of field-cutttable suspension cable.

INSTALLATION


Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. ForFor Kable Lite due to weight.

ACCESSORIES & OPTICAL CONTROLS

Swag Hook

WEIGHT

3lb / 1.36kg ±

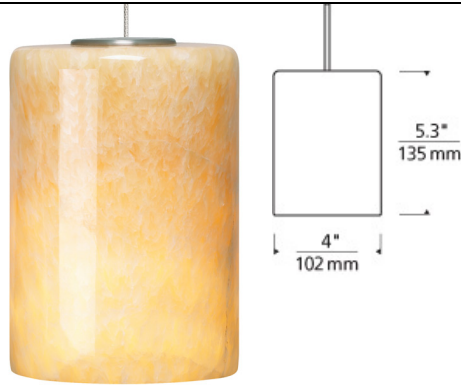

onyx



onyx

ORDERING INFORMATION

700	SYSTEM	CBO	COLOR	FINISH	LAMP
FJ	FREEJACK		ONYX	Z ANTIQUE BRONZE	12 VOLT HALOGEN
MP	MONOPOINT			C CHROME	-LEDS830 12 VOLT LED 80 CRI 3000K
MO	MONORAIL			S SATIN NICKEL	-24 24 VOLT HALOGEN
MO2	TWO-CIRCUIT MONORAIL				

Note: MP includes 4" Round Flush Canopy. Note: MP includes 4 Round Flush Canopy.

When installing LED option on MO2 only magnetic transformers may be used.



TECH LIGHTING®

7400 Linder Avenue
Skokie, Illinois 60077

T 847.410.4400
F 847.410.4500

Tech Lighting, L.L.C.

700 ____ CBO ____ _ _ _

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



©2015 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.