

The Ash outdoor wall sconce is a modern take on the classic industrial-style light fixture. The Ash features a sleek metal shade and clear diffuser that creates a column of diffused light from under the shade. Ash wall sconces feature energy-efficient, fully dimmable integrated LED lighting. Available in four sizes (8", 10", 12", 16") and two finishes: Bronze and Charcoal.

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized acrylic lensing
- IP-65 Rated

### SPECIFICATIONS

DELIVERED LUMENS	515 or 1189 with clear cylinder 300 or 613 with clear lens
WATTS	8 or 18
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / Surge Protector
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B1-U1-G0
DARK SKY	Compliant (Lensed version only)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	3.5 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.




ASH 8  
shown in bronze/clear lens



ASH 8  
shown in charcoal/clear cylinder

### ORDERING INFORMATION

7000WASH	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	OPTIONS
L927	LED LO-OUTPUT 90 CRI, 2700K	8 8"	C CLEAR CYLINDER D CLEAR LENS	Z BRONZE H CHARCOAL	UNV 120V-277V UNIVERSAL	NONE PC BUTTON PHOTOCONTROL SP SURGE PROTECTION PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION
H927	LED HI-OUTPUT 90 CRI, 2700K					
L930	LED LO-OUTPUT 90 CRI, 3000K					
H930	LED HI-OUTPUT 90 CRI, 3000K					

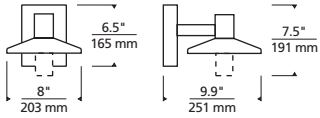


Ash 8

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### ASH 8 WITH CLEAR CYLINDER

Total Lumen Output: 1189  
 Total Power: 18  
 Luminaire Efficacy: 66  
 Color Temp: 3000K  
 CRI: 90  
 BUG Rating: B1-U1-G0

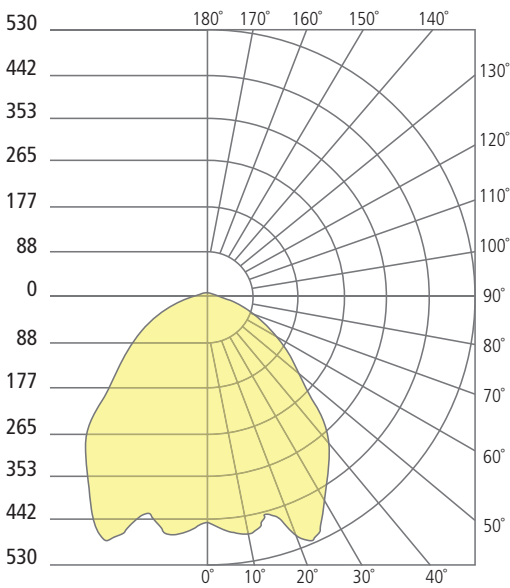

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---

The Ash outdoor wall sconce is a modern take on the classic industrial-style light fixture. The Ash features a sleek metal shade and clear diffuser that creates a column of diffused light from under the shade. Ash wall sconces feature energy-efficient, fully dimmable integrated LED lighting. Available in four sizes (8", 10", 12", 16") and two finishes: Bronze and Charcoal.

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized acrylic lensing
- IP-65 Rated

### SPECIFICATIONS

DELIVERED LUMENS	529 or 1114 with clear cylinder 381 or 675 with clear lens
WATTS	8 or 18
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / Surge Protector
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B1-U0-G0
DARK SKY	Compliant (Lensed version only)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	3.5 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



ASH 10  
shown in bronze/clear cylinder




ASH 10  
shown in charcoal/clear lens

### ORDERING INFORMATION

7000WASH	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	OPTIONS
L927	LED LO-OUTPUT 90 CRI, 2700K	10 10"	C CLEAR CYLINDER	Z BRONZE	UNV 120V-277V UNIVERSAL	NONE
H927	LED HI-OUTPUT 90 CRI, 2700K		D CLEAR LENS	H CHARCOAL		BUTTON PHOTOCONTROL
L930	LED LO-OUTPUT 90 CRI, 3000K					SURGE PROTECTION
H930	LED HI-OUTPUT 90 CRI, 3000K					BUTTON PHOTOCONTROL & SURGE PROTECTION

# ASH 10 WALL SCONCE

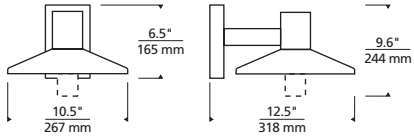


Ash 10

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### ASH 10 WITH CLEAR LENS

Total Lumen Output: 381  
 Total Power: 8  
 Luminaire Efficacy: 48  
 Color Temp: 3000K  
 CRI: 90  
 BUG Rating: B1-U0-G0

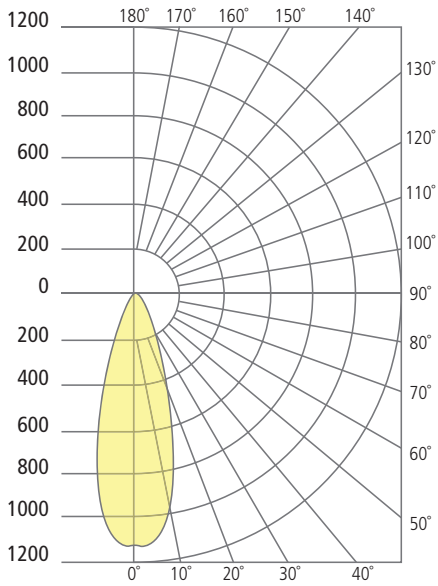

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500

The Ash outdoor wall sconce is a modern take on the classic industrial-style light fixture. The Ash features a sleek metal shade and clear diffuser that creates a column of diffused light from under the shade. Ash wall sconces feature energy-efficient, fully dimmable integrated LED lighting. Available in four sizes (8", 10", 12", 16") and two finishes: Bronze and Charcoal.

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized acrylic lensing
- IP-65 Rated

### SPECIFICATIONS

DELIVERED LUMENS	619 or 1115 with clear cylinder 400 or 863 with clear lens
WATTS	8 or 18
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / Surge Protector
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U1-G0
DARK SKY	Compliant (Lensed version only)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	4 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



ASH 12  
shown in bronze/clear cylinder




ASH 12  
shown in charcoal/clear lens

### ORDERING INFORMATION

7000WASH	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	OPTIONS
L927	LED LO-OUTPUT 90 CRI, 2700K	12 12"	C CLEAR CYLINDER	Z BRONZE	UNV 120V-277V UNIVERSAL	NONE
H927	LED HI-OUTPUT 90 CRI, 2700K		D CLEAR LENS	H CHARCOAL		BUTTON PHOTOCONTROL
L930	LED LO-OUTPUT 90 CRI, 3000K					SURGE PROTECTION
H930	LED HI-OUTPUT 90 CRI, 3000K					BUTTON PHOTOCONTROL & SURGE PROTECTION

# ASH 12 WALL SCONCE

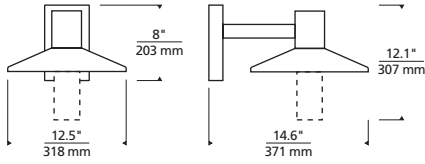


Ash 12

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### ASH 12 WITH CYLINDER

Total Lumen Output: 619  
 Total Power: 8  
 Luminaire Efficacy: 77  
 Color Temp: 3000K  
 CRI: 90  
 BUG Rating: B0-U1-G0

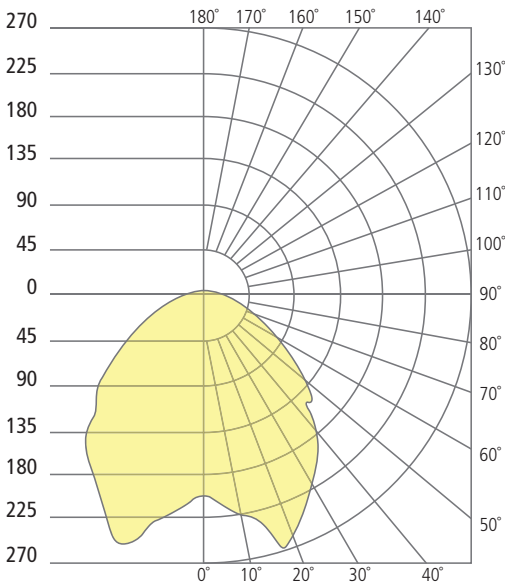

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500

The Ash outdoor wall sconce is a modern take on the classic industrial-style light fixture. The Ash features a sleek metal shade and clear diffuser that creates a column of diffused light from under the shade. Ash wall sconces feature energy-efficient, fully dimmable integrated LED lighting. Available in four sizes (8", 10", 12", 16") and two finishes: Bronze and Charcoal.

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized acrylic lensing
- IP-65 Rated

### SPECIFICATIONS

DELIVERED LUMENS	591 or 1255 with clear cylinder 567 or 1406 with clear lens
WATTS	8 or 18
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / Surge Protector
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B1-U0-G0
DARK SKY	Compliant (Lensed version only)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	11 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



ASH 16  
shown in charcoal/clear cylinder




ASH 16  
shown in bronze/clear lens

### ORDERING INFORMATION

7000WASH	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	OPTIONS
L927	LED LO-OUTPUT 90 CRI, 2700K	16 16"	C CLEAR CYLINDER	Z BRONZE	UNV 120V-277V UNIVERSAL	NONE
H927	LED HI-OUTPUT 90 CRI, 2700K		D CLEAR LENS	H CHARCOAL		BUTTON PHOTOCONTROL
L930	LED LO-OUTPUT 90 CRI, 3000K					SURGE PROTECTION
H930	LED HI-OUTPUT 90 CRI, 3000K					BUTTON PHOTOCONTROL & SURGE PROTECTION

# ASH 16 WALL SCONCE

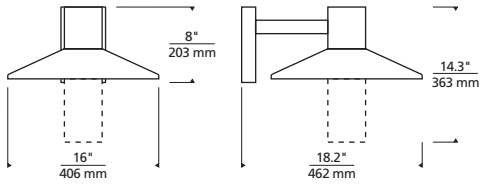


Ash 16

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### ASH 16 WITH CLEAR LENS

Total Lumen Output: 1406  
 Total Power: 18  
 Luminaire Efficacy: 78  
 Color Temp: 3000K  
 CRI: 90  
 BUG Rating: B1-U0-G0

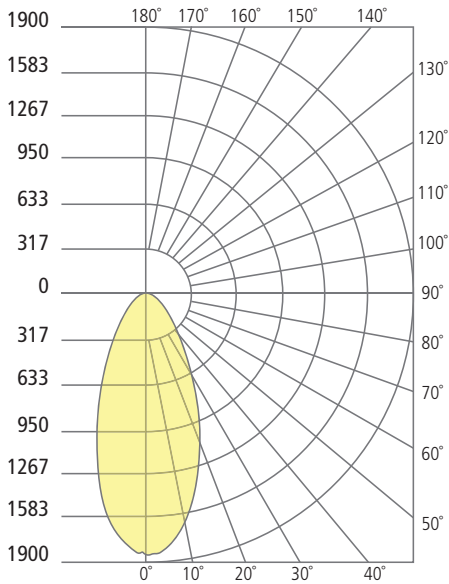

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500