

BOXIE SMALL WALL/CEILING



Featuring a thick, square polished pressed-glass shade suspended from a die-cast base, the modern Boxie's LED light source beautifully illuminates a space without calling attention to itself. It easily mounts to the ceiling or wall for ultimate flexibility.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

Ceiling or wall mounting option

SPECIFICATIONS

DELIVERED LUMENS	472.2 LED
WATTS	12 LED
VOLTAGE	120V, 277V (LED only)
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall or Ceiling
CCT	3000K or 4000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B1-U3-G1
DARK SKY	Compliant (Ceiling)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	4 lbs.



BOXIE SMALL
shown in bronze



BOXIE SMALL
shown in charcoal




* Visit techlighting.com for specific warranty limitations and details.

ORDERING INFORMATION

7000WBX	SHAPE	CRI/CCT	FINISH	VOLTAGE
	5 SMALL - 6"	930 90 CRI, 3000K 940 90 CRI, 4000K INC INCANDESCENT*	Z BRONZE H CHARCOAL	120 120V 277 277V

*120V ONLY

BOXIE SMALL WALL/CEILING




Boxie Small

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

BOXIE SMALL

Total Lumen Output: 472.2
 Total Power: 12
 Luminaire Efficacy: 39.35
 Color Temp: 2700K
 CRI: 90+
 BUG Rating: B1-U3-G1

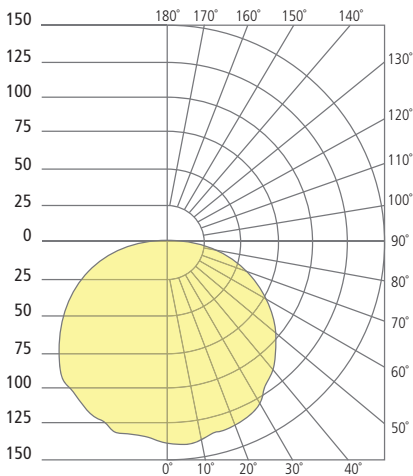

PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES



GENERATION BRANDS
 7400 Linder Avenue, Skokie, Illinois 60077
 T 847.410.4400 F 847.410.4500

BOXIE LARGE WALL/CEILING



Featuring a thick, square polished pressed-glass shade suspended from a die-cast base, the modern Boxie's LED light source beautifully illuminates a space without calling attention to itself. It easily mounts to the ceiling or wall for ultimate flexibility.

High quality LM80-tested LEDs

for consistent long-life performance and color


Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing


Ceiling or wall mounting option

SPECIFICATIONS

DELIVERED LUMENS	1192 LED
WATTS	23 LED
VOLTAGE	120V, 277V (LED only)
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall or Ceiling
CCT	3000K or 4000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B1-U3-G1
DARK SKY	Compliant (Ceiling)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	8 lbs.

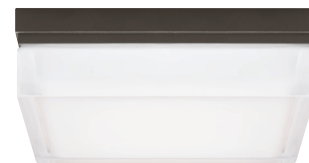

BOXIE LARGE
shown in bronze

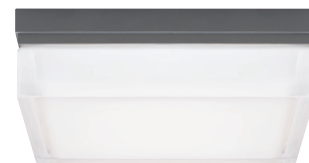

BOXIE LARGE
shown in charcoal




* Visit techlighting.com for specific warranty limitations and details.

ORDERING INFORMATION

7000WBX	SHAPE	CRI/CCT	FINISH	VOLTAGE
	L LARGE - 9"	930 90 CRI, 3000K 940 90 CRI, 4000K INC INCANDESCENT*	Z BRONZE H CHARCOAL	120 120V 277 277V

*120V ONLY

BOXIE LARGE WALL/CEILING

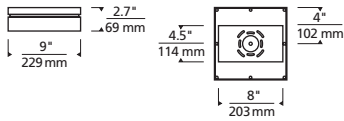


Boxie Large

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

BOXIE LARGE

- Total Lumen Output: 1192
- Total Power: 23
- Luminaire Efficacy: 51.8
- Color Temp: 3000K
- CRI: 90+
- BUG Rating: B1-U3-G1

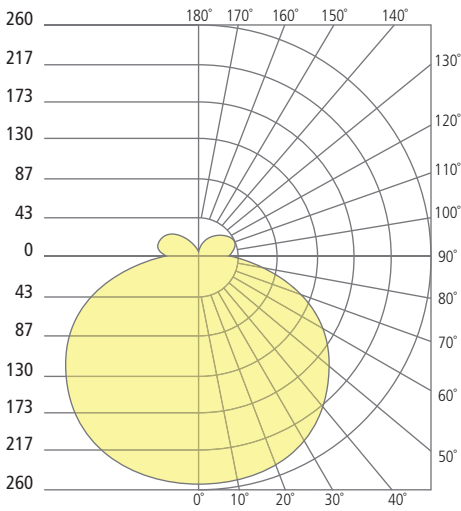

PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES



GENERATION BRANDS
7400 Linder Avenue, Skokie, Illinois 60077
T 847.410.4400 F 847.410.4500