## Spur Pendant




#### **GENERAL PRODUCT INFORMATION:**




This product is ETL listed and suitable only for indoor dry locations and approved for use at any height above the finished floor.

### **Install the Glass**

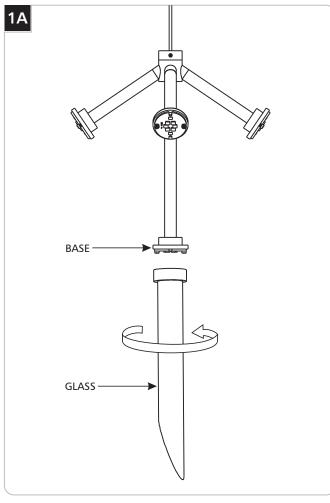

Install the glass by screwing it into the base. Do not over-tighten.



700FJSPR


# Adjust The Fixture Height

3

**2** Back out (do not remove) the set screw on the conical connector with the provided Allen wrench.


300


3 Pull the coaxial cable out.




•

1.1

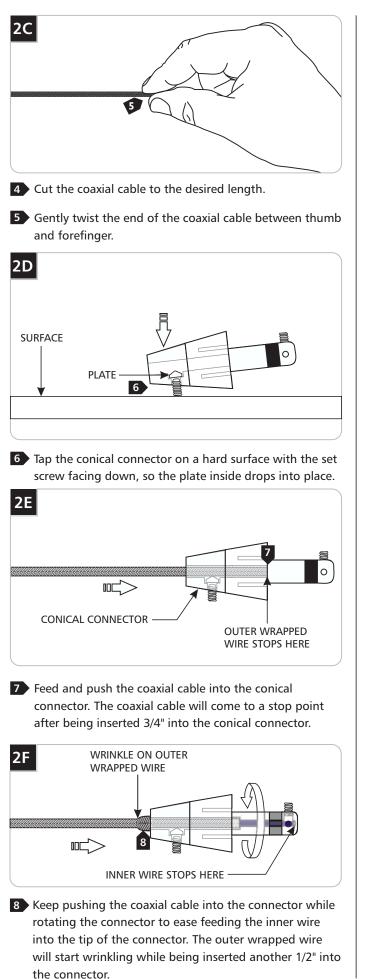




- Look into the sight hole on the top of the connector to make sure that the inner wire is contacting the end of the connector.
- 10 Hold the coaxial cable in place and tighten the set screw on tip of the connector with the provided Allen wrench. <u>Make sure this set screw connection is tight.</u>



Firmly tighten the set screw on the conical connector.



**12** Pull the coaxial cable toward the fixture to smooth the wrinkles.

### SAVE THESE INSTRUCTIONS!

