



TWINS LINE





Suspension — Design by Glenn Marys






PRODUCT INFORMATION






tossB






TWINS LINE

Suspension — Design by Glenn Marys

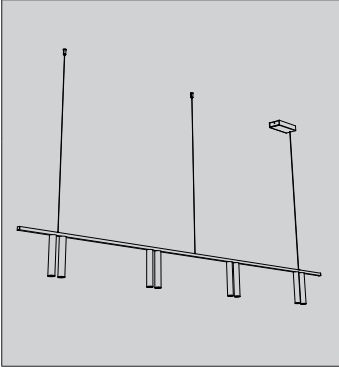
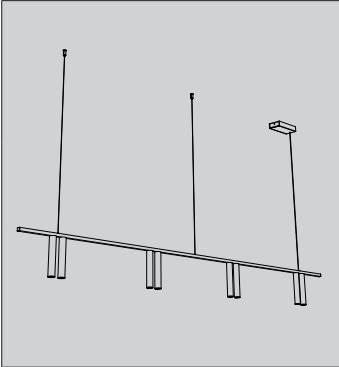
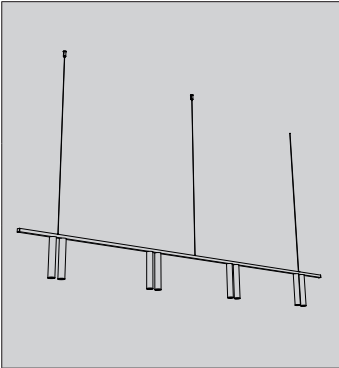
	TWINS LINE 1200 TUBE 75 DIM TRIAC	FINISH & ORDER CODE Black T110H19DZLT White T110H19DWLT Brushed alu T110H19DABT Bronze T110H19DOET Brushed brass T110H19DLBT Light bronze T110H19DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1600 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS LINE 1200 TUBE 75 DIM DALI	FINISH & ORDER CODE Black T110H19DZL White T110H19DWL Brushed alu T110H19DAB Bronze T110H19DOE Brushed brass T110H19DLB Light bronze T110H19DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1600 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS LINE 1200 TUBE 75	FINISH & ORDER CODE Black T110H22DZL White T110H22DWL Brushed alu T110H22DAB Bronze T110H22DOE Brushed brass T110H22DLB Light bronze T110H22DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 46V - 350mA Lumen: 1600 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS LINE 1200 TUBE 125 DIM TRIAC	FINISH & ORDER CODE Black T110H20DZLT White T110H20DWLT Brushed alu T110H20DABT Bronze T110H20DOET Brushed brass T110H20DLBT Light bronze T110H20DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1600 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20




	TWINS LINE 1200 TUBE 125 DIM DALI	FINISH & ORDER CODE Black T110H20DZL White T110H20DWL Brushed alu T110H20DAB Bronze T110H20DOE Brushed brass T110H20DLB Light bronze T110H20DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1600 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS LINE 1200 TUBE 125	FINISH & ORDER CODE Black T110H23DZL White T110H23DWL Brushed alu T110H23DAB Bronze T110H23DOE Brushed brass T110H23DLB Light bronze T110H23DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 46V - 350mA Lumen: 1600 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS LINE 1200 TUBE 185 DIM TRIAC	FINISH & ORDER CODE Black T110H21DZLT White T110H21DWLT Brushed alu T110H21DABT Bronze T110H21DOET Brushed brass T110H21DLBT Light bronze T110H21DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1600 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS LINE 1200 TUBE 185 DIM DALI	FINISH & ORDER CODE Black T110H21DZL White T110H21DWL Brushed alu T110H21DAB Bronze T110H21DOE Brushed brass T110H21DLB Light bronze T110H21DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1600 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS LINE 1200 TUBE 185	FINISH & ORDER CODE Black T110H24DZL White T110H24DWL Brushed alu T110H24DAB Bronze T110H24DOE Brushed brass T110H24DLB Light bronze T110H24DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 46V - 350mA Lumen: 1600 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20

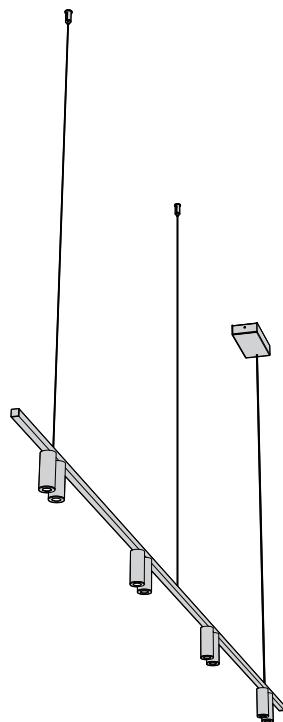
	TWINS LINE 1800 TUBE 75 DIM TRIAC	FINISH & ORDER CODE Black T110H25DZLT White T110H25DWLT Brushed alu T110H25DABT Bronze T110H25DOET Brushed brass T110H25DLBT Light bronze T110H25DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS LINE 1800 TUBE 75 DIM DALI	FINISH & ORDER CODE Black T110H25DZL White T110H25DWL Brushed alu T110H25DAB Bronze T110H25DOE Brushed brass T110H25DLB Light bronze T110H25DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS LINE 1800 TUBE 75	FINISH & ORDER CODE Black T110H28DZL White T110H28DWL Brushed alu T110H28DAB Bronze T110H28DOE Brushed brass T110H28DLB Light bronze T110H28DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS LINE 1800 TUBE 125 DIM TRIAC	FINISH & ORDER CODE Black T110H26DZLT White T110H26DWLT Brushed alu T110H26DABT Bronze T110H26DOET Brushed brass T110H26DLBT Light bronze T110H26DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS LINE 1800 TUBE 125 DIM DALI	FINISH & ORDER CODE Black T110H26DZL White T110H26DWL Brushed alu T110H26DAB Bronze T110H26DOE Brushed brass T110H26DLB Light bronze T110H26DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20

	TWINS LINE 1800 TUBE 125	FINISH & ORDER CODE Black T110H29DZL White T110H29DWL Brushed alu T110H29DAB Bronze T110H29DOE Brushed brass T110H29DLB Light bronze T110H29DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS LINE 1800 TUBE 185 DIM TRIAC	FINISH & ORDER CODE Black T110H27DZLT White T110H27DWLT Brushed alu T110H27DABT Bronze T110H27DOET Brushed brass T110H27DLBT Light bronze T110H27DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS LINE 1800 TUBE 185 DIM DALI	FINISH & ORDER CODE Black T110H27DZL White T110H27DWL Brushed alu T110H27DAB Bronze T110H27DOE Brushed brass T110H27DLB Light bronze T110H27DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS LINE 1800 TUBE 185	FINISH & ORDER CODE Black T110H30DZL White T110H30DWL Brushed alu T110H30DAB Bronze T110H30DOE Brushed brass T110H30DLB Light bronze T110H30DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS LINE 2400 TUBE 75 DIM TRIAC	FINISH & ORDER CODE Black T110H34DZLT White T110H34DWLT Brushed alu T110H34DABT Bronze T110H34DOET Brushed brass T110H34DLBT Light bronze T110H34DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 230V Lumen: 3200 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20


	TWINS LINE 2400 TUBE 75 DIM DALI	FINISH & ORDER CODE Black T110H34DZL White T110H34DWL Brushed alu T110H34DAB Bronze T110H34DOE Brushed brass T110H34DLB Light bronze T110H34DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 230V Lumen: 3200 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		IP20
	TWINS LINE 2400 TUBE 75	FINISH & ORDER CODE Black T110H31DZL White T110H31DWL Brushed alu T110H31DAB Bronze T110H31DOE Brushed brass T110H31DLB Light bronze T110H31DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 91V - 350mA Lumen: 3200 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		IP20
	TWINS LINE 2400 TUBE 125 DIM TRIAC	FINISH & ORDER CODE Black T110H35DZLT White T110H35DWLT Brushed alu T110H35DABT Bronze T110H35DOET Brushed brass T110H35DLBT Light bronze T110H35DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 230V Lumen: 3200 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		IP20
	TWINS LINE 2400 TUBE 125 DIM DALI	FINISH & ORDER CODE Black T110H35DZL White T110H35DWL Brushed alu T110H35DAB Bronze T110H35DOE Brushed brass T110H35DLB Light bronze T110H35DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 230V Lumen: 3200 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		IP20
	TWINS LINE 2400 TUBE 125	FINISH & ORDER CODE Black T110H32DZL White T110H32DWL Brushed alu T110H32DAB Bronze T110H32DOE Brushed brass T110H32DLB Light bronze T110H32DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 91V - 350mA Lumen: 3200 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		IP20

	TWINS LINE 2400 TUBE 185 DIM TRIAC	FINISH & ORDER CODE Black T110H36DZLT White T110H36DWLT Brushed alu T110H36DABT Bronze T110H36DOET Brushed brass T110H36DLBT Light bronze T110H36DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 230V Lumen: 3200 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS LINE 2400 TUBE 185 DIM DALI	FINISH & ORDER CODE Black T110H36DZL White T110H36DWL Brushed alu T110H36DAB Bronze T110H36DOE Brushed brass T110H36DLB Light bronze T110H36DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 230V Lumen: 3200 Gear: INCLUDED Beam angle: 45° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS LINE 2400 TUBE 185	FINISH & ORDER CODE Black T110H33DZL White T110H33DWL Brushed alu T110H33DAB Bronze T110H33DOE Brushed brass T110H33DLB Light bronze T110H33DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 91V - 350mA Lumen: 3200 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20


 Ø55	CEILING BASE SB 55	FINISH & ORDER CODE Black TBL011ZL White TBL011WL Brushed alu TBL011AB Bronze TBL011OE Brushed brass TBL011LB Light bronze TBL011BL
	EXCL. DRIVER	ADDITIONAL INFORMATION RAL colours available
 Ø100	CEILING BASE SB 100	FINISH & ORDER CODE Black TBL012ZL White TBL012WL Brushed alu TBL012AB Bronze TBL012OE Brushed brass TBL012LB Light bronze TBL012BL
	EXCL. DRIVER	ADDITIONAL INFORMATION RAL colours available
 Ø80	CEILING PLATE C1 80	FINISH & ORDER CODE Black TPL003ZL White TPL003WL Brushed alu TPL003AB Bronze TPL003OE Brushed brass TPL003LB Light bronze TPL003BL
	EXCL. DRIVER	ADDITIONAL INFORMATION RAL colours available Hole size: 50mm Mounting holes distance: 60mm
 Ø100	CEILING PLATE C1 100	FINISH & ORDER CODE Black TPL004ZL White TPL004WL Brushed alu TPL004AB Bronze TPL004OE Brushed brass TPL004LB Light bronze TPL004BL
	EXCL. DRIVER	ADDITIONAL INFORMATION RAL colours available Hole size: 70mm Mounting holes distance: 82mm
 Ø10	CABLE GUIDE LED	FINISH & ORDER CODE Black TA001ZL White TA001WL Bronze TA001OE Brushed brass TA001LB Light bronze TA001BL
	ADDITIONAL INFORMATION RAL colours available	




CEILING BASE RECTANGLE 205




TWINS LINE PROFILE




TWINS LINE 1200




TWINS LINE 1800




TWINS LINE 2400



TWINS TUBE 75



TWINS TUBE 125



TWINS TUBE 185

