

Kosa 18 Ceiling

700FMKOSA18_ 1.0

VISUAL COMFORT & CO.

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.

This product can be dimmed with most ELV or TRIAC dimmers.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

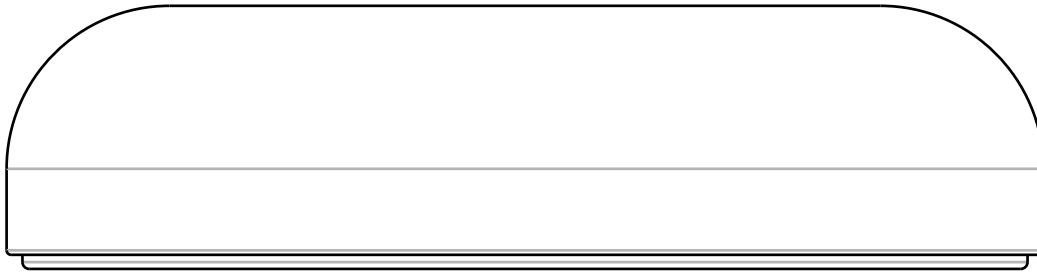

Install the Fixture

1A

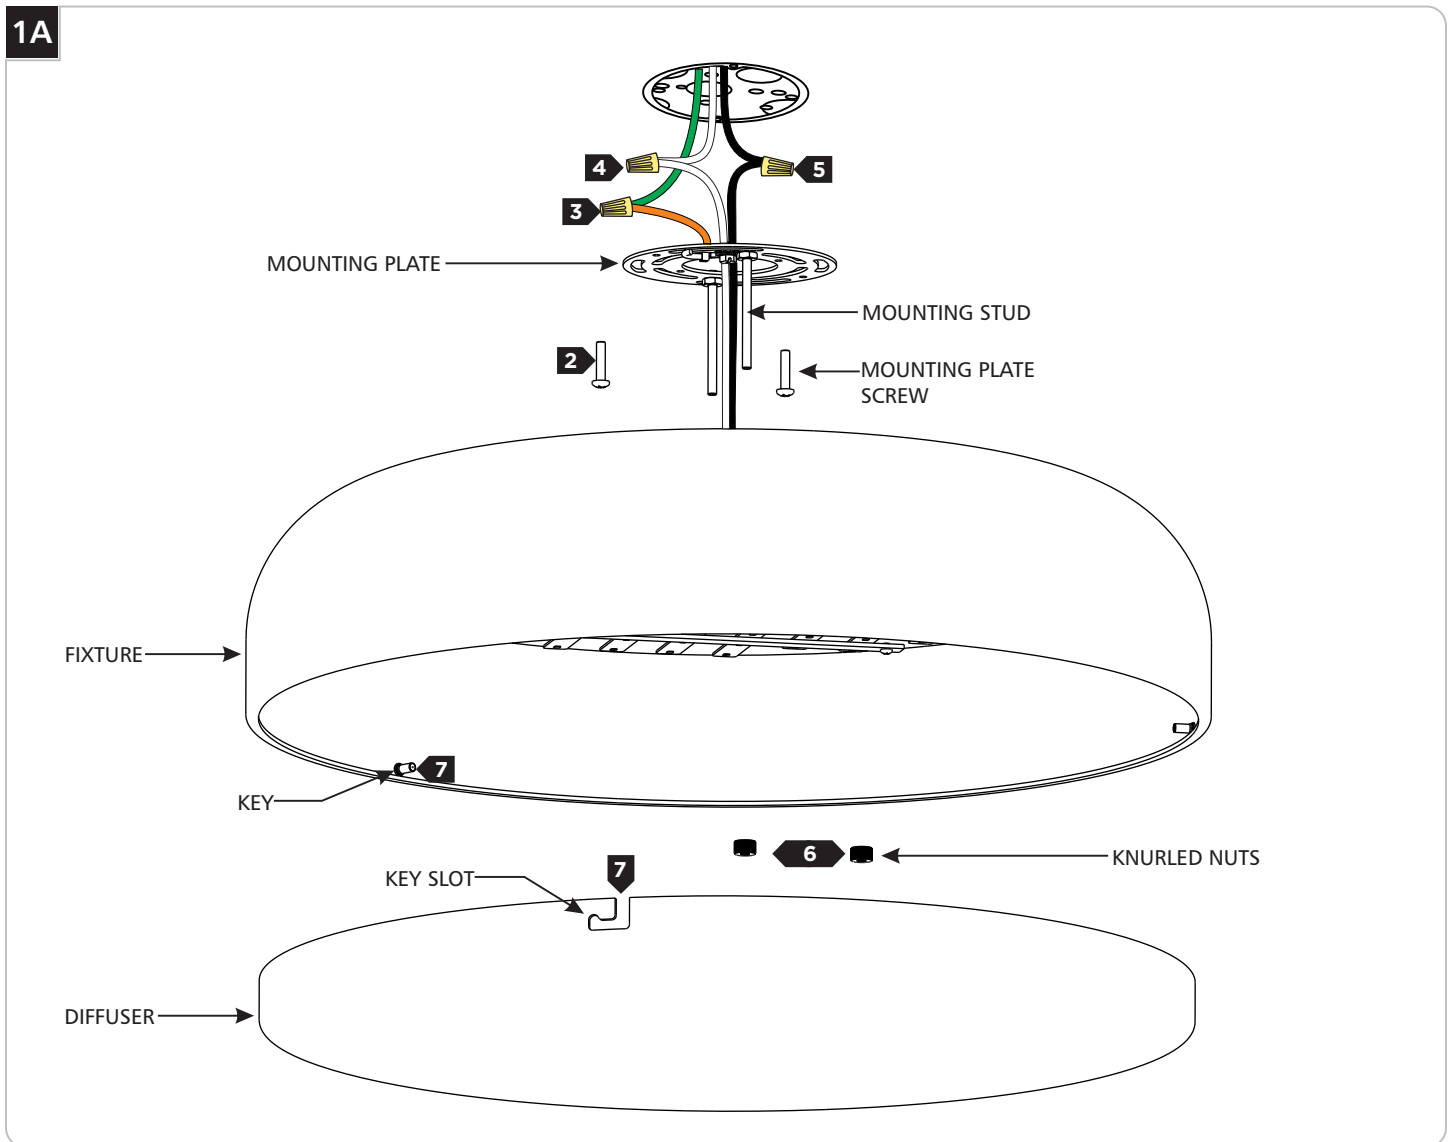

- 1 Separate the mounting plate from the fixture by removing the knurled nuts.
- 2 Install the mounting plate to the junction box with the provided #8-32 screws.
- 3 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4 Connect the white fixture wire to the neutral power line with a wire nut.
- 5 Connect the black fixture wire to the hot power line with a wire nut.
- 6 Properly place the wires and wire nut connections into the junction box and install the fixture by aligning the holes to the mounting studs on the mounting plate. Secure it place with the knurled nuts.
- 7 Alining the key slots on the diffuser to the keys on the fixture, slide the diffuser on then rotate it to lock in place.

VISUAL COMFORT & CO.

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.visualcomfort.com

©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification