

# Pullman Flush Mount

700FMPUL\_

1.0

## VISUAL COMFORT & Co.

MODERN COLLECTION

### GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.

This product can be dimmed with most ELV or TRIAC dimmers.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Use minimum 90°C supply conductors.**

**SAVE THESE INSTRUCTIONS!**

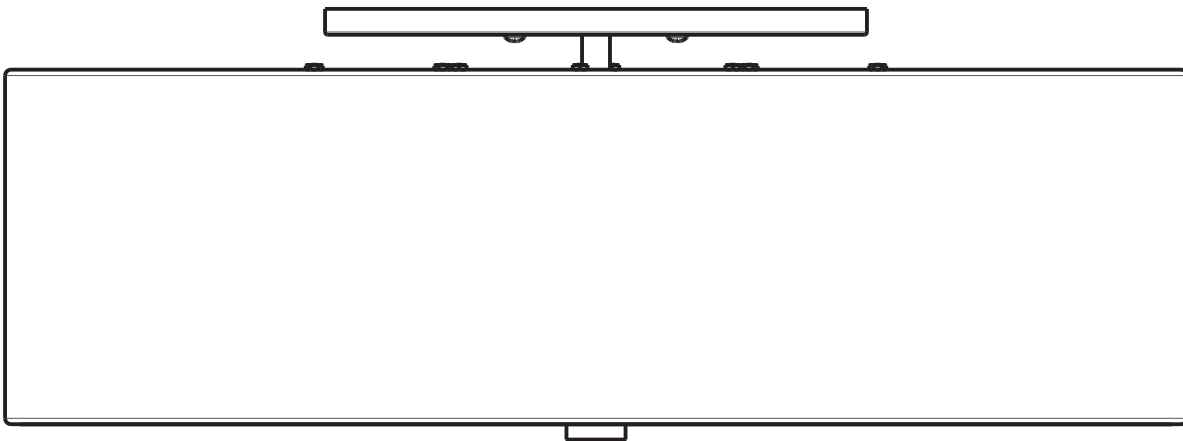

VISUAL COMFORT & Co.

7400 Linder Ave., Skokie, IL 60077


T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

## Install the Fixture

1A

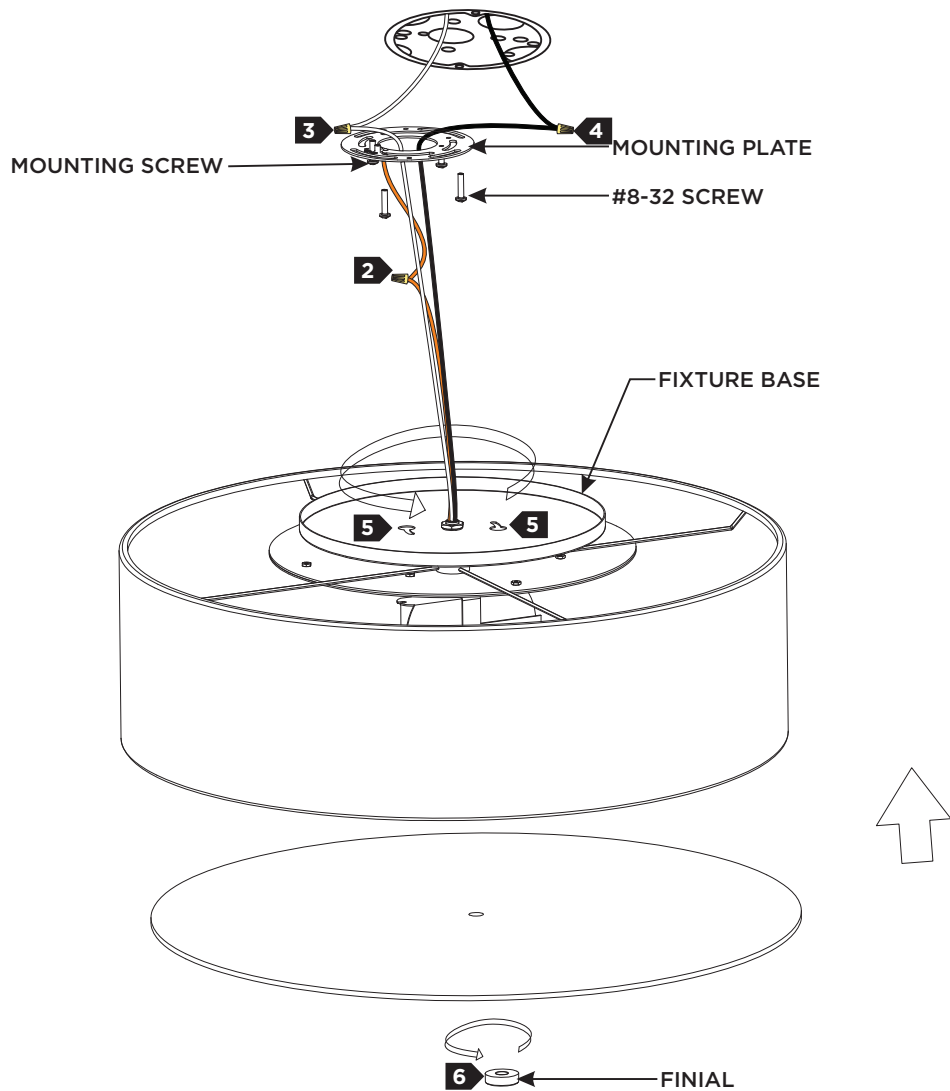

- 1 Install the mounting plate to the junction box with the provided #8-32 screws.
- 2 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3 Connect the white driver wire to the neutral power line with a wire nut.
- 4 Connect the black driver wire to the hot power line with a wire nut.
- 5 Properly place the wires and wire nut connections into the junction box, align the keyed slots on the fixture base with the mounting screw heads, rotate counter clockwise to lock the fixture base in place. Tighten the mounting screws.
- 6 Place the diffuser on the threaded pipe located inside the fixture and secure it in place by screwing the finial onto the pipe.