

# Phobos Chandelier

700PHB24\_, 700PHB36\_ 1.0

## VISUAL COMFORT & Co.

MODERN COLLECTION

### GENERAL PRODUCT INFORMATION:



This product is suitable for indoor locations.

Dimmable with most LED compatible ELV, Triac, and 0-10V dimmers.

This instruction shows a typical installation.


### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Use minimum 90°C supply conductors.**

**2 PERSON INSTALL**

**SAVE THESE INSTRUCTIONS!**

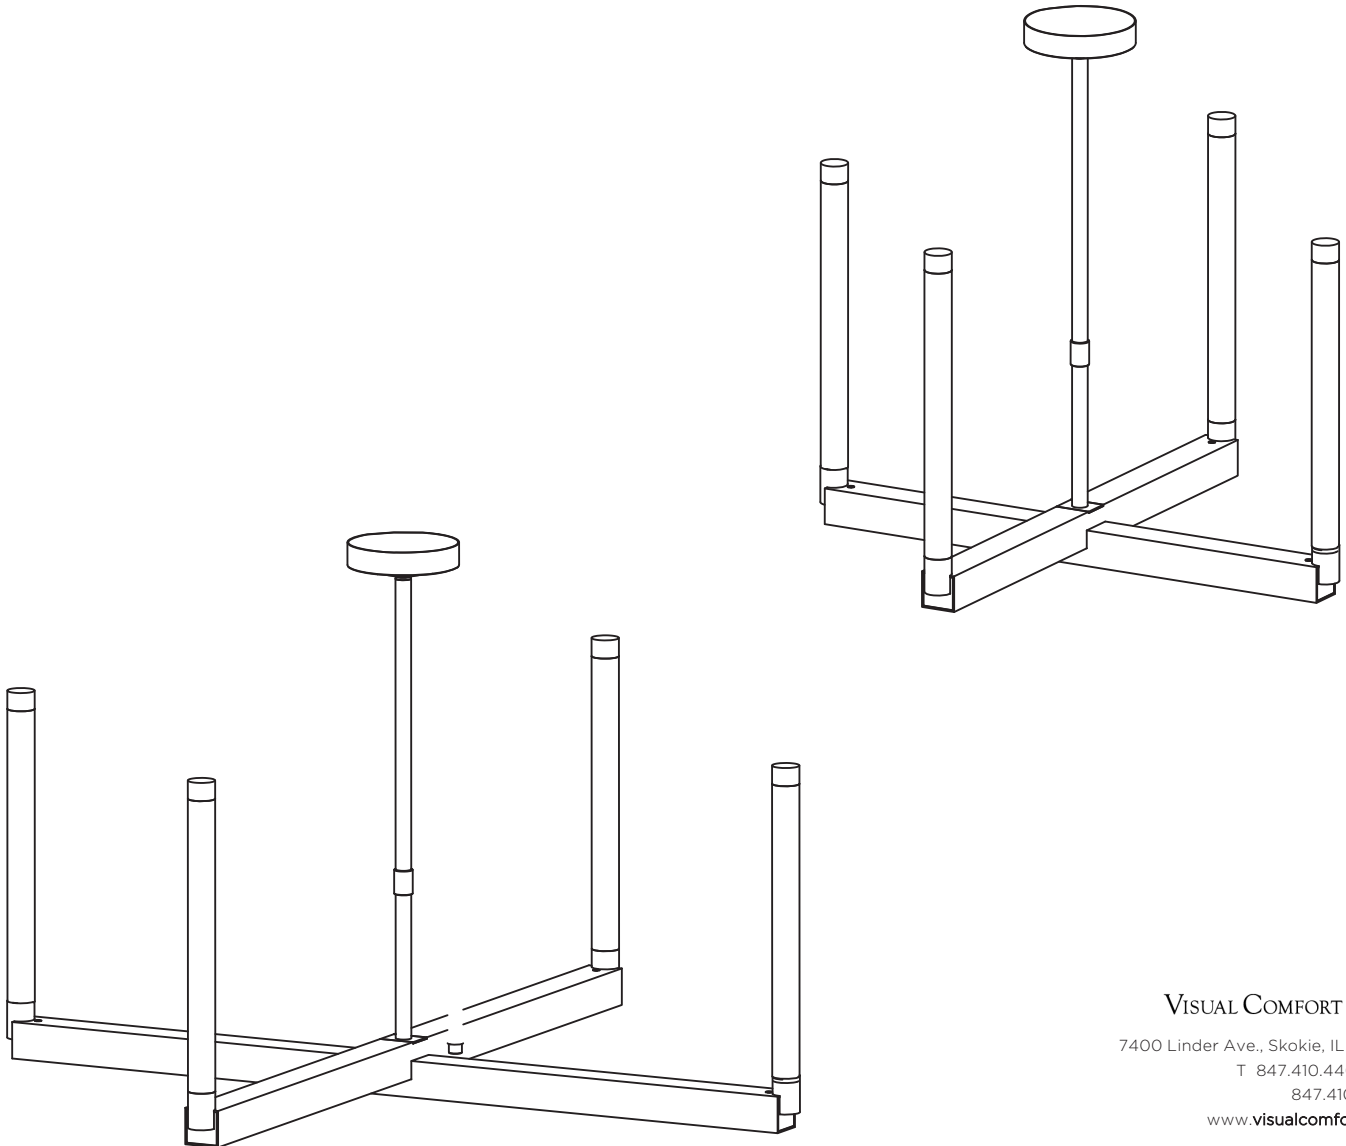

VISUAL COMFORT & Co.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

# Install the Fixture

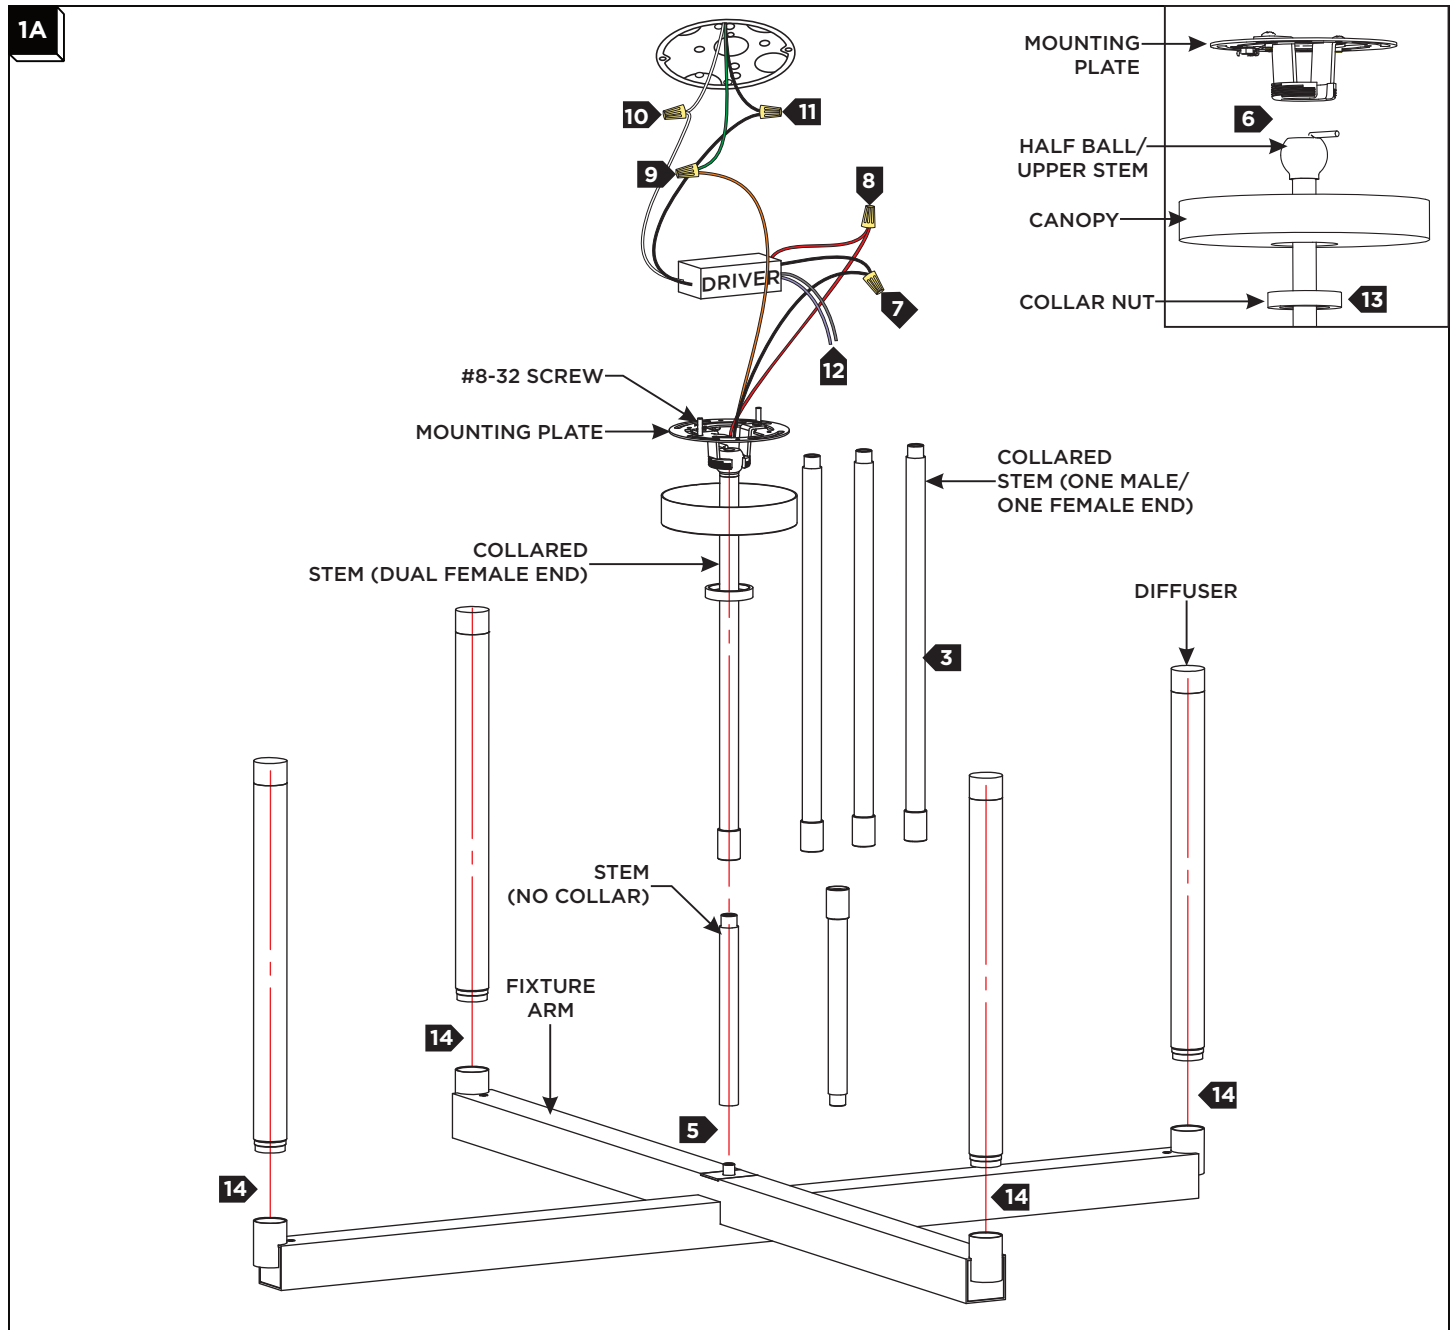

- 1** Remove the mounting plate and driver from the canopy.
- 2** Secure the mounting plate to ceiling using the #8-32 screws provided,
- 3** Determine the desired height of the fixture using the provided stems and half ball/upper stem and assemble them by screwing them together. **Note:** the stem without a collar must be installed on the bottom of the stem assembly.
- 4** Slide the canopy, then the collar nut onto the half ball/stem assembly.
- 5** Feed the fixture wires through the stem assembly, then screw the stem assembly to the top of the fixture base.
- 6** Seat the half ball into the mounting plate ensuring no wires are being pinched.
- 7** Connect the black fixture wire to the negative (-) output driver wire with a wire nut.
- 8** Connect the red fixture wire to the positive (+) output driver wire with a wire nut.
- 9** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 10** Connect the white input driver wire to the neutral power line wire with a wire nut.
- 11** Connect the black input driver wire to the hot power line wire with a wire nut.
- 12** **For 0-10V Dimming**, connect the purple and gray wires to a compatible dimmer. **If not using 0-10V dimming**, make sure to cap off these wires.
- 13** Neatly place the driver, wire, and wire nut connections inside the canopy/junction box, then slide the canopy up over the mounting plate and secure in place with the collar nut.
- 14** Install the diffuser by screwing it at the end of the fixture arm. Repeat for any remaining diffusers.