

Ebell Wall

700WSEBL, KWWS10727, KWWS10827 | 1.1

VISUAL COMFORT & Co.

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Dimmable with most LED compatible ELV, TRIAC and 0-10V dimmers.


Mounts vertically only. Up and downlight.

This instruction shows a typical installation.




CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

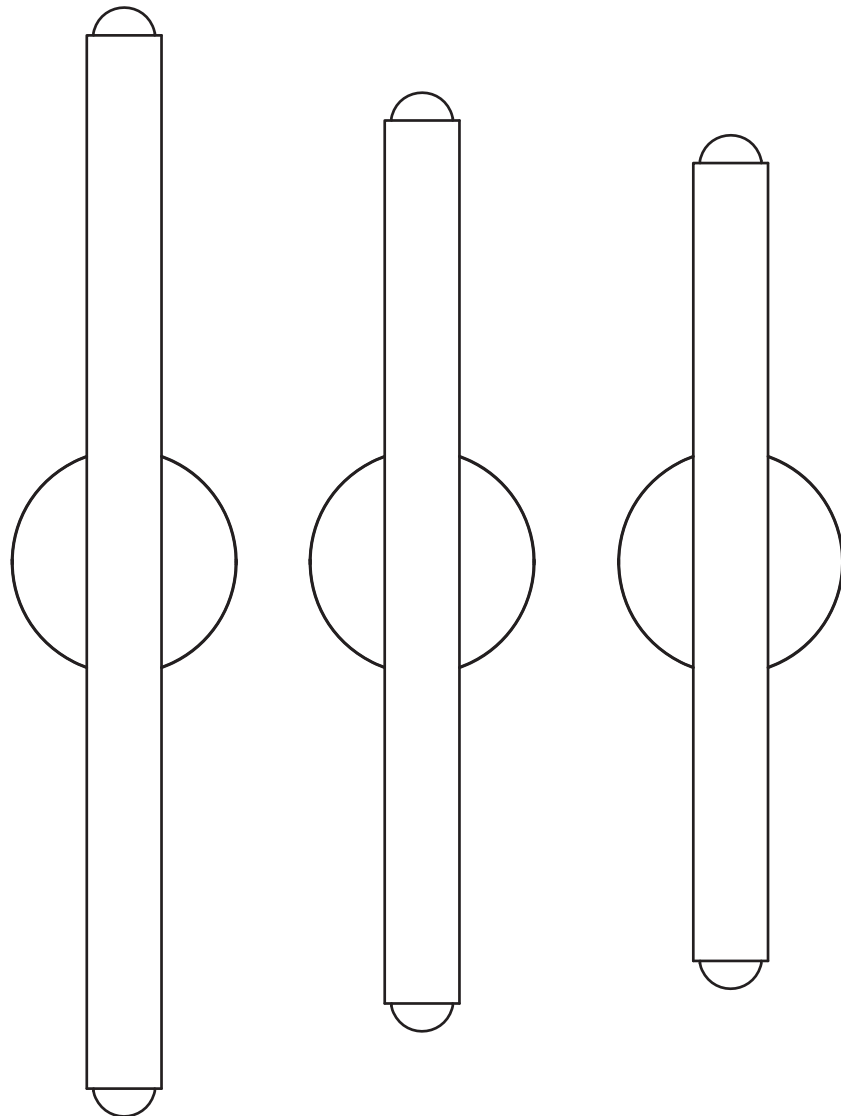

Install the Fixture

1A

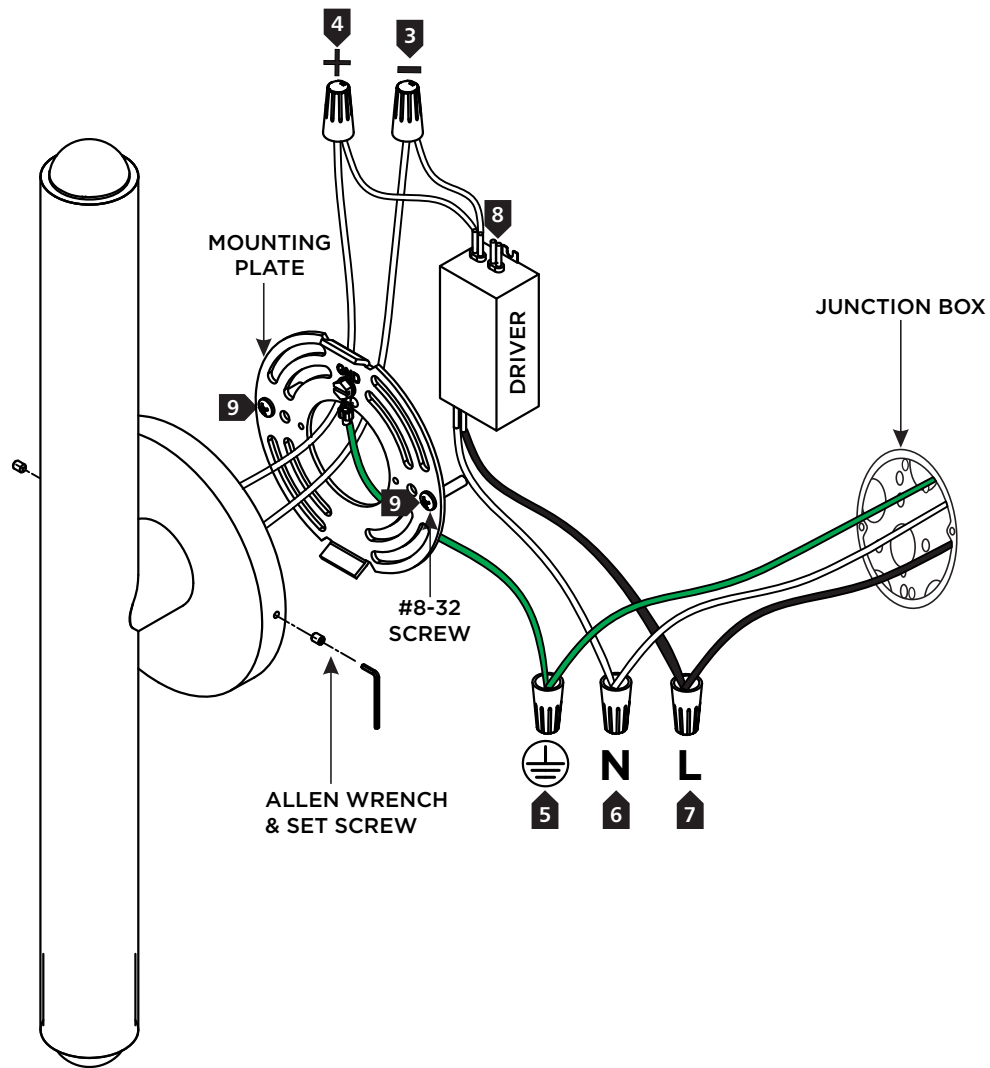

- 1 With the provided Allen wrench, loosen (do not remove) the set screw on the fixture base.
- 2 Remove the mounting plate from the fixture base
- 3 Connect the negative (-) fixture wire to the negative (-) driver output wire with a wire nut.
- 4 Connect the positive (+) fixture wire to the positive (+) driver output wire with a wire nut.
- 5 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 6 Connect the white input driver wire to the neutral power line with a wire nut.
- 7 Connect the black input driver wire to the hot power line with a wire nut.
- 8 **For 0-10V dimming**, use the purple and gray/pink wires to connect to a compatible dimmer. **If not using 0-10V dimming**, make sure to cap off these wires.
- 9 Properly place the driver, all wires, and wire nut connections into the junction box and install the mounting plate to the junction box with the two #8-32 screws provided.
- 10 Mount the fixture base onto the mounting plate, and secure it in place by tightening the set screws using the provided Allen wrench.