

Wythe Medium Wall

700WSWYT15_ 1.0

VISUAL COMFORT & Co.

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is suitable for damp locations.

This product can be dimmed with most LED compatible ELV and Triac dimmers.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

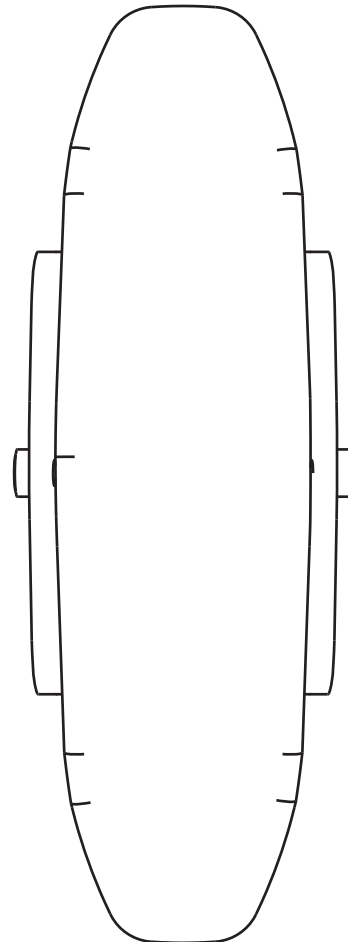

VISUAL COMFORT & Co.

7400 Linder Ave., Skokie, IL 60077


T 847.410.4400 | F

847.410.4500

www.visualcomfort.com

Install the Fixture

1A

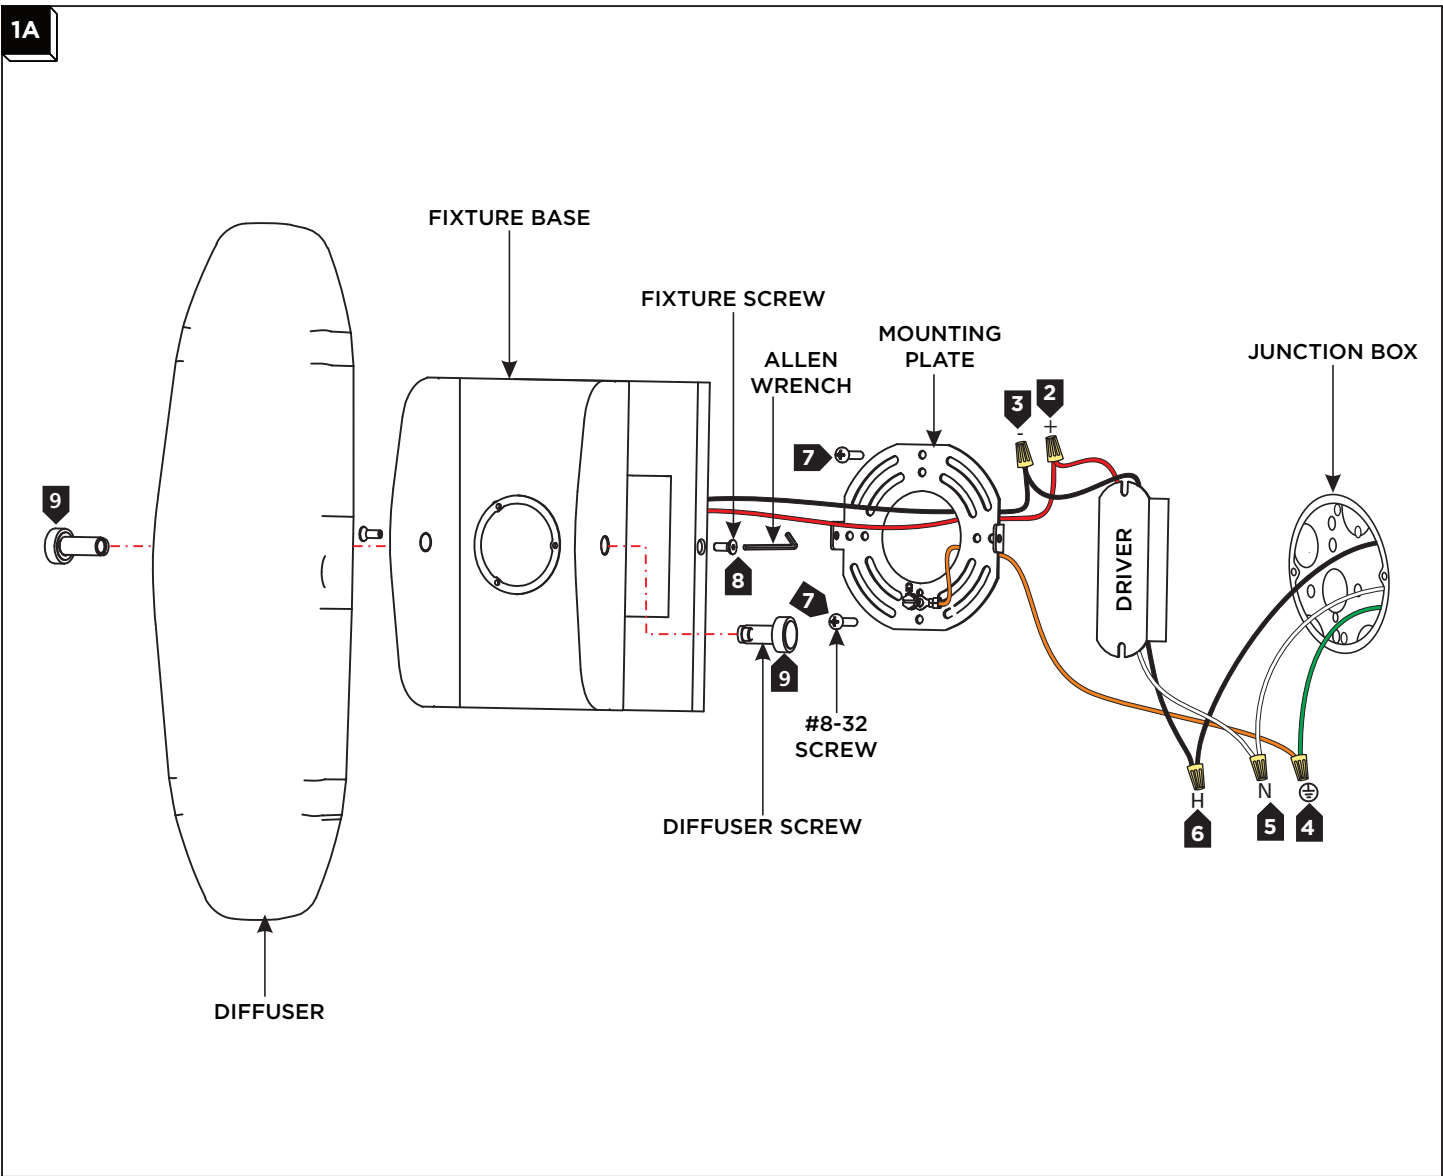

- 1 Separate the mounting plate from the fixture base by removing the fixtures screws with the provided Allen wrench.
- 2 Connect the negative (-) fixture wire to the negative (-) driver output wire with a wire nut.
- 3 Connect the positive (+) fixture wire to the positive (+) driver output wire with a wire nut.
- 4 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5 Connect the white input driver wire to the neutral power line with a wire nut.
- 6 Connect the black input driver wire to the hot power line with a wire nut.
- 7 Properly place the driver, all wires, and wire nut connections into the junction box and install the mounting plate to the junction box with the two provided #8-32 screws.
- 8 Mount the fixture base onto the mounting plate, and secure it in place by tightening the set screws using the provided Allen wrench.
- 9 Install a diffuser onto the fixture base and secure it in place with a diffuser screw on each side.