

TUBE ARCHITECTURAL - model: DS-CD WAC LIGHTING

LED Ceiling Mounts

Responsible Lighting®




Fixture Type:


Catalog Number:

Project:


Location:



DS-CD05



DS-CD06



DS-CD08

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in reflector for superior optics; An appealing cylindrical profile perfect for accent and wall wash lighting.

FEATURES

- IP65 rated, ETL & cETL wet location listed
- Meets 2013 California Title 24 Efficiency
- Energy Star® rated
- Solid aluminum construction
- ANSI compliant warm/neutral LED bins, for the finest color consistency possible
- Universal driver (120V-220V-277V)
- 0-10V Dimming

SPECIFICATIONS

- **Rated Life:** 80,000 hours
- **CRI:** Up to 90

ORDERING NUMBER

Model	Diameter	Watt	Beam	Color Temp	Finish				
DS-CD	05	5"	24W	S	Spot	927 2700K (90CRI)	BK	Black	
				N	Narrow	27 2700K	WT	White	
	06	6"	42W	N	Narrow	930 3000K (90CRI)	BZ	Bronze	
				F	Flood	30 3000K	GH	Graphite	
	08	8"	54W	F	Flood	35 3500K			

DS-CD - -

Example: **DS-CD05-S27-BZ**

Size	Watts	Beam	Color Temp	CRI	Lumens	CBCP	Efficacy
5"	24W	Spot	2700K	90	1071	4870	47 Lm/W
			2700K	85	1260	5730	53 Lm/W
			3000K	90	1210	5438	53 Lm/W
			3000K	85	1360	6110	57 Lm/W
			3500K	85	1610	7065	67 Lm/W
5"	24W	Narrow	2700K	90	1067	3094	46 Lm/W
			2700K	85	1255	3640	52 Lm/W
			3000K	90	1242	3119	54 Lm/W
			3000K	85	1395	3505	58 Lm/W
			3500K	85	1575	4485	66 Lm/W
5"	24W	Flood	2700K	90	986	2057	43 Lm/W
			2700K	85	1160	2420	48 Lm/W
			3000K	90	1228	2390	53 Lm/W
			3000K	85	1380	2685	58 Lm/W
			3500K	85	1450	3045	60 Lm/W
6"	42W	Spot	2700K	90	1579	8662	38 Lm/W
			2700K	85	1815	10190	43 Lm/W
			3000K	90	1709	10204	41 Lm/W
			3000K	85	2035	11465	48 Lm/W
			3500K	85	2130	11725	51 Lm/W
6"	42W	Narrow	2700K	90	1566	4012	37 Lm/W
			2700K	85	1800	4720	43 Lm/W
			3000K	90	1688	4659	40 Lm/W
			3000K	85	2010	5235	48 Lm/W
			3500K	85	2115	5495	50 Lm/W
6"	42W	Flood	2700K	90	1557	2512	37 Lm/W
			2700K	85	1790	2955	43 Lm/W
			3000K	90	1693	2982	40 Lm/W
			3000K	85	2015	3350	48 Lm/W
			3500K	85	2110	3500	50 Lm/W
8"	54W	Spot	2700K	90	2860	20455	53 Lm/W
			2700K	85	3365	24065	62 Lm/W
			3000K	90	3230	21796	60 Lm/W
			3000K	85	3670	24490	68 Lm/W
			3500K	85	4015	28660	74 Lm/W
8"	54W	Narrow	2700K	90	2890	6851	54 Lm/W
			2700K	85	3400	8060	63 Lm/W
			3000K	90	3318	7907	61 Lm/W
			3000K	85	3770	8885	70 Lm/W
			3500K	85	4005	9390	74 Lm/W
8"	54W	Flood	2700K	90	2886	4633	53 Lm/W
			2700K	85	3395	5450	63 Lm/W
			3000K	90	3322	5407	62 Lm/W
			3000K	85	3775	6075	70 Lm/W
			3500K	85	4005	6490	74 Lm/W

WAC Lighting

www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050


Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585


TUBE ARCHITECTURAL - model: DS-CD WAC LIGHTING

Photometrics - 3000K Responsible Lighting®


5" Diameter, 20° Beam Angle, 3000K

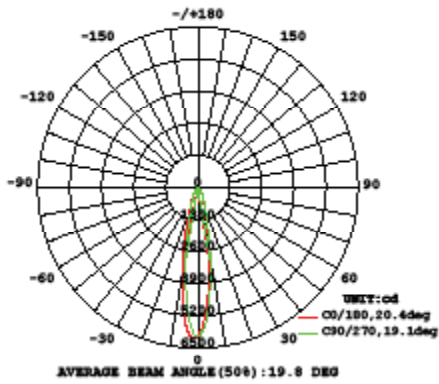


5" Diameter, 27° Beam Angle, 3000K

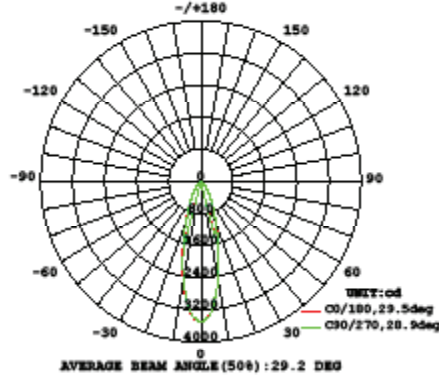


5" Diameter, 36° Beam Angle, 3000K

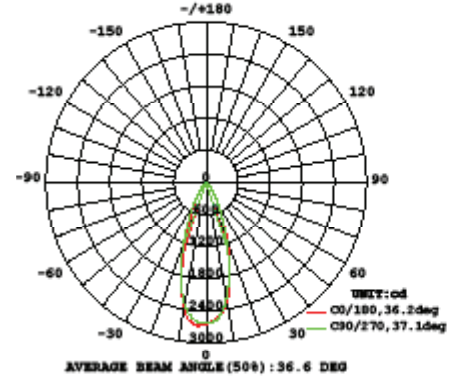


6" Diameter, 17° Beam Angle, 3000K

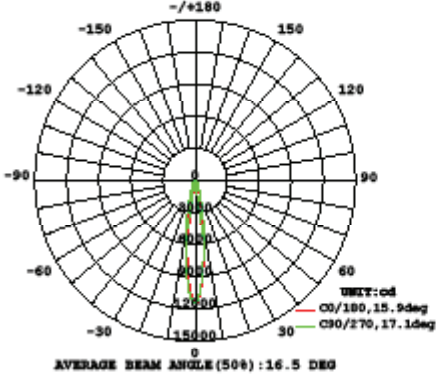


6" Diameter, 30° Beam Angle, 3000K

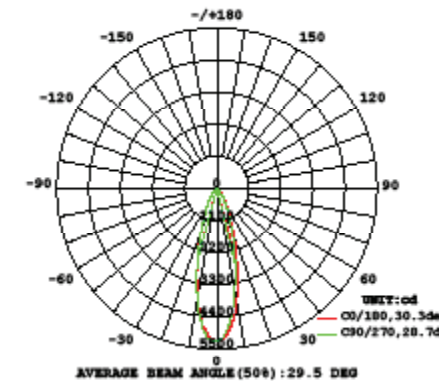


6" Diameter, 42° Beam Angle, 3000K

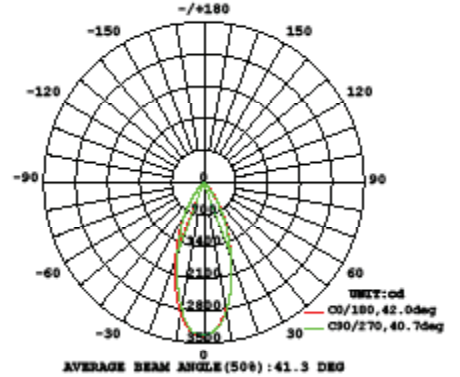


8" Diameter, 14° Beam Angle, 3000K

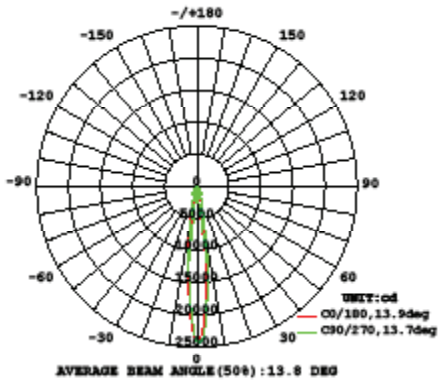

8" Diameter, 28° Beam Angle, 3000K

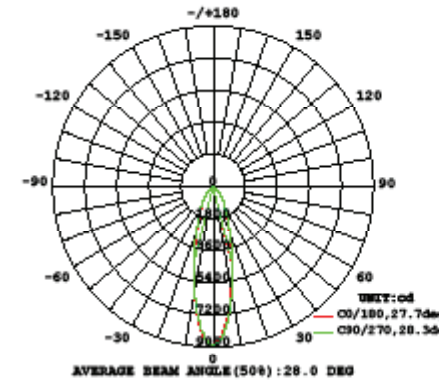

8" Diameter, 40° Beam Angle, 3000K

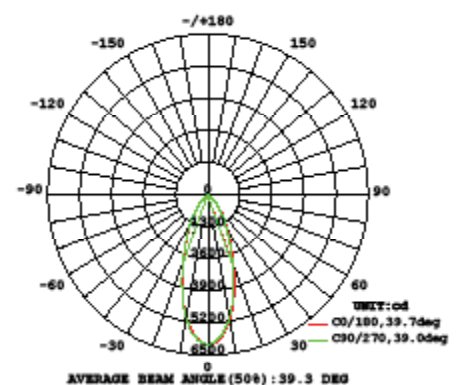

WAC Lighting
 www.waclighting.com
 Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive • Port Washington, NY 11050
 Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
 168 Brea Canyon Road • City of Industry, CA 91789
 Phone (800) 526.2588 • Fax (800) 526.2585