

TUBE ARCHITECTURAL - model: DS-WS WAC LIGHTING

LED Wall Mounts Responsible Lighting®




Fixture Type:

Catalog Number:

Project:

Location:

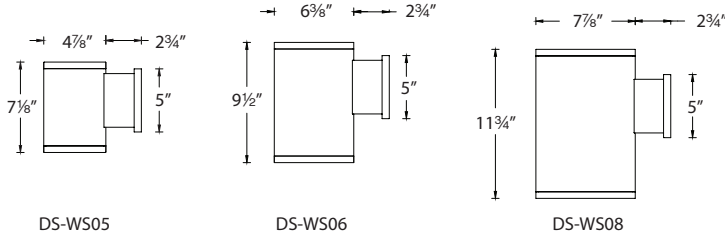

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in reflector for superior optics; An appealing cylindrical profile perfect for accent and wall wash lighting.

FEATURES

- IP65 rated, ETL & cETL wet location listed
- Meets 2013 California Title 24 Efficiency
- Energy Star® rated
- Solid aluminum construction
- ANSI compliant warm/neutral LED bins, for the finest color consistency possible
- Universal driver (120V-220V-277V)
- 0-10V Dimming

SPECIFICATIONS

- **Rated Life:** 80,000 hours
- **CRI:** Up to 90

Size	Watts	CCT	CRI	Lumens		Lumens		
				Straight Up or Down	Efficacy	Away From the Wall	Towards the Wall	Efficacy
5"	24W	2700K	90	986	41 Lm/W	1029	1029	45 Lm/W
		2700K	85	1160	48 Lm/W	1210	1210	50 Lm/W
		3000K	90	1228	51 Lm/W	1295	1295	56 Lm/W
		3000K	85	1380	58 Lm/W	1455	1455	61 Lm/W
		3500K	85	1450	60 Lm/W	1560	1560	65 Lm/W
6"	42W	2700K	90	1522	36 Lm/W	1914	1914	46 Lm/W
		2700K	85	1790	43 Lm/W	2200	2200	52 Lm/W
		3000K	90	1793	43 Lm/W	1873	1873	45 Lm/W
		3000K	85	2015	48 Lm/W	2230	2230	53 Lm/W
		3500K	85	2110	50 Lm/W	2445	2445	58 Lm/W
8"	54W	2700K	90	2886	53 Lm/W	2809	2809	52 Lm/W
		2700K	85	3395	63 Lm/W	3305	3305	61 Lm/W
		3000K	90	3360	62 Lm/W	3089	3089	57 Lm/W
		3000K	85	3775	70 Lm/W	3510	3510	65 Lm/W
		3500K	85	4005	74 Lm/W	3665	3665	68 Lm/W

ORDERING NUMBER

Model#	Type	Diameter	Watt	Color Temp	Light Direction	Finish	
DS-WS	Single Sided (Dark sky friendly)	05F 06F 08F	5" 6" 8"	24W 42W 54W	S Straight up or down A Away from the wall B Towards the wall	BK Black WT White BZ Bronze GH Graphite	
							927 2700K (90CRI)
							27 2700K
							930 3000K (90CRI)
							30 3000K
35 3500K							

DS-WS - -

Example: **DS-WS06F-30B-BK**

WAC Lighting

www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

TUBE ARCHITECTURAL - model: DS-WD WAC LIGHTING

LED Wall Mounts

Responsible Lighting®



PRODUCT DESCRIPTION


Precise engineering using the latest energy efficient LED technology with a built-in reflector for superior optics; An appealing cylindrical profile perfect for accent and wall wash lighting.

Fixture Type:

Catalog Number:

Project:

Location:

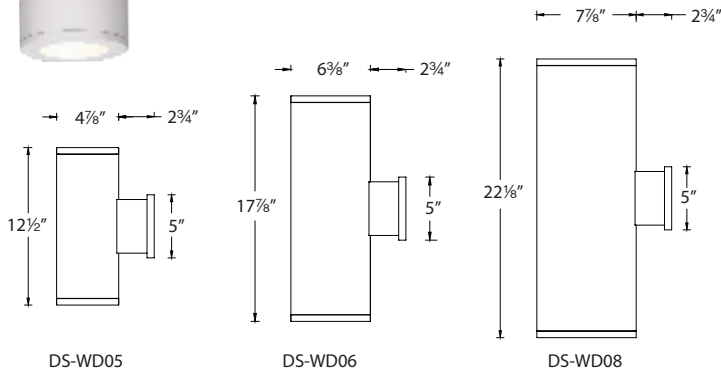

FEATURES

- IP65 rated, ETL & cETL wet location listed
- Meets 2013 California Title 24 Efficiency
- Energy Star® rated
- ANSI compliant warm/neutral LED bins for the finest color consistency possible
- Universal driver (120V-220V-277V)
- 0-10V Dimming

SPECIFICATIONS

- **Rated Life:** 80,000 hours
- **CRI:** Up to 90

Size	Watts	CCT	CRI	Lumens		Lumens			
				Straight Up or Down	Efficacy	Away From the Wall	Towards the Wall	One Side Each	Efficacy
5"	24W x 2	2700K	90	986 x 2	41 Lm/W	1029 x 2	1029 x 2	1029 x 2	45 Lm/W
		2700K	85	1160 x 2	48 Lm/W	1210 x 2	1210 x 2	1210 x 2	50 Lm/W
		3000K	90	1228 x 2	51 Lm/W	1295 x 2	1295 x 2	1295 x 2	56 Lm/W
		3000K	85	1380 x 2	58 Lm/W	1455 x 2	1455 x 2	1455 x 2	61 Lm/W
		3500K	85	1450 x 2	60 Lm/W	1560 x 2	1560 x 2	1560 x 2	65 Lm/W
6"	42W x 2	2700K	90	1522 x 2	36 Lm/W	1914 x 2	1914 x 2	1914 x 2	46 Lm/W
		2700K	85	1790 x 2	43 Lm/W	2200 x 2	2200 x 2	2200 x 2	52 Lm/W
		3000K	90	1793 x 2	43 Lm/W	1873 x 2	1873 x 2	1873 x 2	45 Lm/W
		3000K	85	2015 x 2	48 Lm/W	2230 x 2	2230 x 2	2230 x 2	53 Lm/W
		3500K	85	2110 x 2	50 Lm/W	2445 x 2	2445 x 2	2445 x 2	58 Lm/W
8"	54W x 2	2700K	90	2886 x 2	53 Lm/W	2809 x 2	2809 x 2	2809 x 2	52 Lm/W
		2700K	85	3395 x 2	63 Lm/W	3305 x 2	3305 x 2	3305 x 2	61 Lm/W
		3000K	90	3360 x 2	62 Lm/W	3089 x 2	3089 x 2	3089 x 2	57 Lm/W
		3000K	85	3775 x 2	70 Lm/W	3510 x 2	3510 x 2	3510 x 2	65 Lm/W
		3500K	85	4005 x 2	74 Lm/W	3665 x 2	3665 x 2	3665 x 2	68 Lm/W

ORDERING NUMBER

Model#	Type	Diameter	Watt	Color Temp	Light Direction	Finish				
DS-WD	Double Sided	05F 5"	24W	927 2700K (90CRI)		BK Black				
				27 2700K				WT White		
				930 3000K (90CRI)						BZ Bronze
				30 3000K						
35 3500K										

DS-WD - -

Example: **DS-WD08F-30C-WT**

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585


Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585


TUBE ARCHITECTURAL - model: DS-WS WAC LIGHTING

Photometrics - 3000K Responsible Lighting®


5" Diameter, 3000K, Away From or Towards Wall Distribution

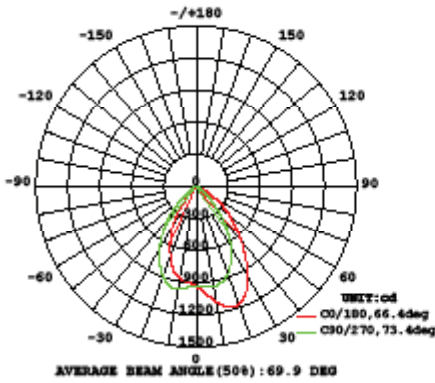


5" Diameter, 3000K, Straight Up or Down Distribution

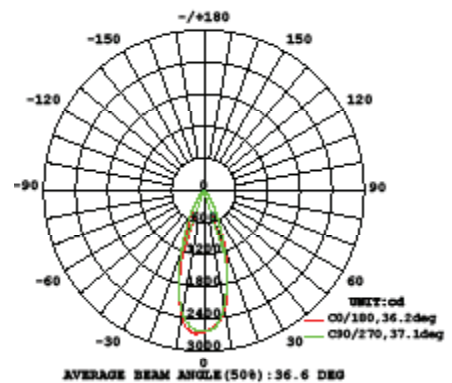


6" Diameter, 3000K, Away From or Towards Wall Distribution

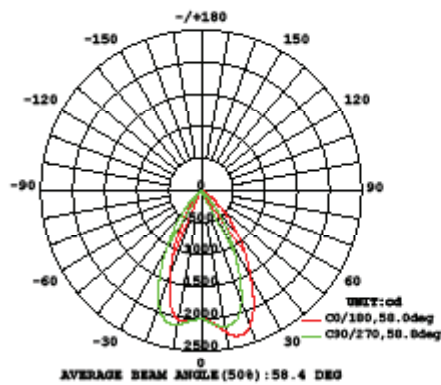


6" Diameter, 3000K, Straight Up or Down Distribution

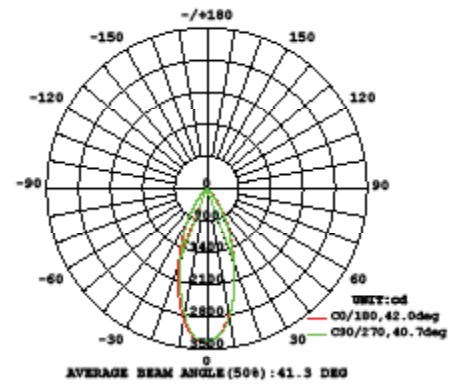

8" Diameter, 3000K, Away From or Towards Wall Distribution

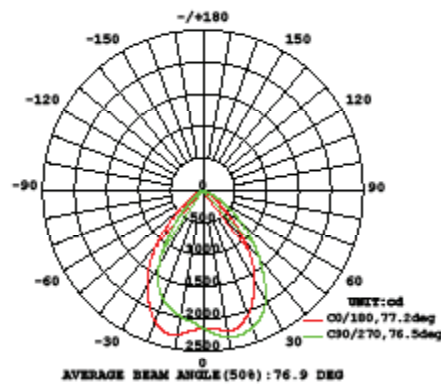

8" Diameter, 3000K, Straight Up or Down Distribution

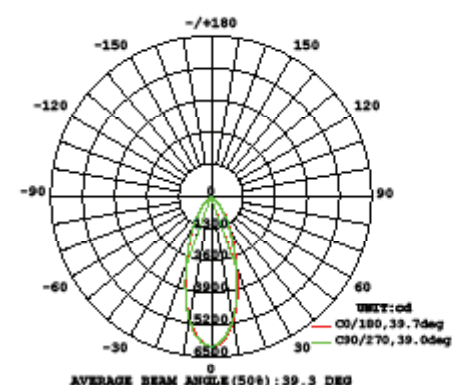

WAC Lighting
 www.waclighting.com
 Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive • Port Washington, NY 11050
 Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
 168 Brea Canyon Road • City of Industry, CA 91789
 Phone (800) 526.2588 • Fax (800) 526.2585