
### HR-LED87

### LEDme® Button Light

## WAC LIGHTING

### Responsible Lighting®

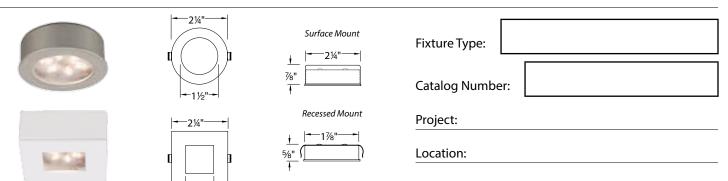

### PRODUCT DESCRIPTION

Designed for recessed or surface mounted installations, delivering strong light output with the latest in LED technology.

#### **FEATURES**

- · Recessed or surface mounting
- Quick and easy installation
- Includes 72" lead wire
- 3000K color temperature
- 70,000 hour rated life
- UL and CUL Listed

**ORDER NUMBER** 

• 5 year WAC Lighting product warranty

### **FIXTURE PERFORMANCE**

	Watt	Lumens	Efficacy	CRI
HR-LED87	5W	180	36 Lm/W	0.5
HR-LED87S	4.8W	155 32.3 Lm/W		85

### **SPECIFICATIONS**

**Construction:** Die-cast aluminum fixture, stamped steel housing for surface mount. Glass beam spread lens.

Wiring: Includes 72" pre-installed wires that lead out through the top.

**Transformers:** Class 2, 24V remote and plug-in transformers allow for up to 20 button lights to be wired together. Use a multiple terminal block to wire up to 6 fixtures in a neat under cabinet installation without the use of open splices (see below).

Light Source: Six 3000K LEDs.

Dimming: May be dimmed to 10% with an electronic low voltage (ELV) dimmer.

**Mounting:** Recessed – 2%" cutout hole. Compression springs hold fixture firmly in place. Surface – Screw housing cover to surface, compress springs and insert into cover. Not recommended for use in ceiling.

**Finish:** Black (BK), Dark Bronze (DB) and White (WT) powder coat, electroplated Brushed Nickel (BN), Copper Bronze (CB) and Chrome (CH).

Standards: UL & CUL Listed.

# | Model # | Color Temp | Finish | | BK | BK | BK | | BK |


HR-LED87	Round	3000K	BN	Brushed Nickel
HR-LED87S	Square		CB	Copper Bronze
HR-LED87-27 HR-LED87S-27	Round Square	2700K	CH DB WT	Chrome Dark Bronze White

Rlack

\_

Example: HR-LED87S-27-BN

- · Minimizes wiring back to transformer
- No voltage drop, power supplied using a variable current
- · If one fixture goes out the rest remain on



# FINISHES BK BN CB CH DB WT

Model #	Finish
HR-LED-COV	BK, BN, CB, CH, DB, WT
	v voltage HR-88 and HR-86 og existing wiring and cutout

### CLASS 2 ELECTRONIC TRANSFORMERS

Туре	Model	Dim	Input	Output	Power Up To	Dimensions
Domesta	EN-2460-RB2	V	120V	24V AC/60W	12 × LED87	6½"×15/8"×11/4"
Remote	EN-24100-RB2	Yes		24V AC/96W	20 × LED87	6½" × 1½" × 1¼"
Plug-In	EN-2460-P-AR	Yes	120V	24V AC/60W	12 × LED87	2¾" X 15/8" X 1¾"

Includes 6' cord and 5 SL-WC-1 clips.

### MULTIPLE TERMINAL BLOCK

Model #	Dimensions				
MTB-01	L: 3¼"	W: 1¾"	H: %"		

12.5A max accommodates up to 6 output connections for 14 AWG wires.

### FROSTED LENS ACCESSORY

Model #

LENS-13-FR

Softens light and reduce glare for square or round

WAC Lighting www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center 44 Harbor Park Drive • Port Washington, NY 11050 Phone (516) 515.5000 • Fax (516) 515.5050 **Western Distribution Center** 1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585


### **LEDme® BUTTON LIGHT** - HR-LED87

# **WAC LIGHTING**


### Responsible Lighting®

### **Photometrics**


Round - 2700K



Round - 3000K



Square - 2700K



Square - 3000K

