


HR3LEDT118P

3.5" Tesla™ Pro LED Open Reflector

WAC LIGHTING

Responsible Lighting®

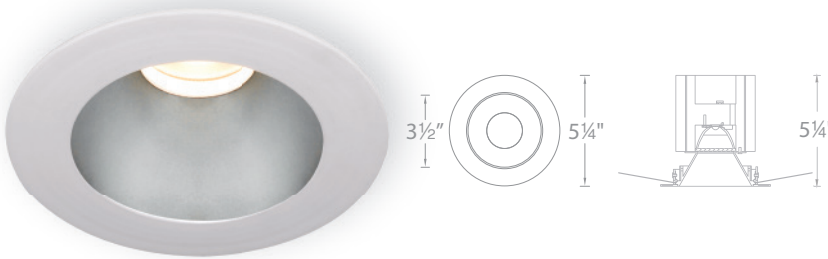

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minimum profile, round downlight trim with interior open reflector

FEATURES

- 3.5" aperture
- Energy Star® rated
- Damp location listed
- 30° visual cutoff angle for glare control
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

Power Consumption: 21.5W

Dimming: 0-10V Dimming: 100%-10%
ELV Dimming: 100%-15% (120V only)

Mounting: Two heavy gauge retention clips hold trim firmly to housing.

Finish: Powder coated white
Electroplated brushed nickel and copper bronze

Standards: ETL & cETL Listed. See table below for Energy Star® qualifying products.

TRIMS

| Model# | Beam | Color Temp | CRI | Lumens | CBCP | Energy Star® | Finish |
|-------------------------------|-------|------------|-----|--------|------|--------------|--|
| HR3LEDT118P Open Reflector | N 30° | 827 2700K | 85 | 1165 | 2536 | Yes | HBN Haze/Brushed Nickel HCB Haze/Copper Bronze HWT Haze/White BBN Specular Black/Brushed Nickel BCB Specular Black/Copper Bronze BWT Specular Black/White BN Brushed Nickel CB Copper Bronze WT White |
| | | 927 2700K | 90 | 970 | 2130 | Yes | |
| | | 830 3000K | 85 | 1195 | 2565 | Yes | |
| | | 930 3000K | 90 | 1110 | 2438 | Yes | |
| | | 835 3500K | 85 | 1325 | 2907 | Yes | |
| | | 840 4000K | 85 | 1365 | 3011 | Yes | |
| | F 55° | 827 2700K | 85 | 1130 | 1389 | Yes | |
| | | 927 2700K | 90 | 935 | 1161 | Yes | |
| | | 830 3000K | 85 | 1174 | 1436 | Yes | |
| | | 930 3000K | 90 | 1100 | 1386 | Yes | |
| | | 835 3500K | 85 | 1280 | 1580 | Yes | |
| | | 840 4000K | 85 | 1335 | 1634 | Yes | |

HR3LEDT118P

Example: HR3LED118PF930BCB

COMPATIBLE HOUSINGS See individual housing spec sheets for complete information.

New Construction

| | | | |
|---|-----------|---|-----------|
| HR-3LED-H18D1-ICA Narrow, IC-Rated, Airtight | 120V-277V | HR-3LED-H18D1-ICAC Narrow, IC-Rated, Airtight Chicago Plenum | 120V-277V |
| HR-3LED-H18D-ICA IC-Rated, Airtight | 120V-277V | HR-3LED-H18D-ICAC IC-Rated, Airtight Chicago Plenum | 120V-277V |
| HR-3LED-H18D-EMICA IC-Rated, Airtight Emergency Backup Battery | 120V | HR3LED-H18D-EMICAF IC-Rated, Airtight Emergency Backup Battery | 277V |
| HR-3LED-H18D-A New Construction Non-IC, Airtight | 120V-277V | | |

Remodel

| | | | |
|---|-----------|-------------------------------|-----------|
| HR-3LED-R18D-A Non-IC, Airtight | 120V-277V | HR-3LED-R22D Non-IC | 120V-277V |
|---|-----------|-------------------------------|-----------|

REPLACEMENT MODULES

Reflectors

| | |
|--------------|------------------------|
| Narrow Flood | SL-REF-BL10-1-N |
| Flood | SL-REF-BL10-1-F |

LED

| | | |
|-------|--------|--------------------------|
| 2700K | 85 CRI | BXRC-27E1000-B-03 |
| 2700K | 90 CRI | BXRC-27G1000-B-03 |
| 3000K | 85 CRI | BXRC-30E1000-B-03 |
| 3000K | 90 CRI | BXRC-30G1000-B-03 |
| 3500K | 85 CRI | BXRC-35E1000-B-03 |
| 4000K | 85 CRI | BXRC-40E1000-B-03 |

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760