


HR3LEDT818P

3.5" Tesla™ Pro LED Shower Trim

WAC LIGHTING

Responsible Lighting®

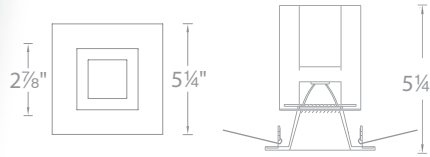

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minimum profile, square shower trim with interior open reflector

FEATURES

- 3.5" aperture
- Energy Star® rated
- Wet location listed
- 30° visual cutoff angle for glare control
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

Power Consumption: 21.5W

Dimming: 0-10V Dimming: 100%-10%
ELV Dimming: 100%-15% (120V only)

Mounting: Two heavy gauge retention clips hold trim firmly to housing.

Finish: Powder coated white
Electroplated brushed nickel and copper bronze

Standards: ETL & cETL Listed. See table below for Energy Star® qualifying products.

TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Energy Star®	Finish
HR3LEDT818P Shower Light Wet Location Listed	N 30°	827 2700K	85	1120	2281	Yes	BN Brushed Nickel CB Copper Bronze WT White
		927 2700K	90	950	1936	Yes	
		830 3000K	85	1165	2351	Yes	
		930 3000K	90	1065	2183	Yes	
		835 3500K	85	1270	2563	Yes	
		840 4000K	85	1295	2603	Yes	

HR3LEDT818P

Example: **HR3LEDT818PN835CB**

COMPATIBLE HOUSINGS

See individual housing spec sheets for complete information.

New Construction

HR-3LED-H18D1-ICAC Narrow, IC-Rated, Airtight	120V -277V	HR-3LED-H18D1-ICAC Narrow, IC-Rated, Airtight Chicago Plenum	120V -277V
HR-3LED-H18D-ICAC IC-Rated, Airtight	120V -277V	HR-3LED-H18D-ICAC IC-Rated, Airtight Chicago Plenum	120V -277V
HR-3LED-H18D-EMICA IC-Rated, Airtight Emergency Backup Battery	120V	HR3LED-H18D-EMICAF IC-Rated, Airtight Emergency Backup Battery	277V
HR-3LED-H18D-A New Construction Non-IC, Airtight	120V-277V		

Remodel

HR-3LED-R18D-A Non-IC, Airtight	120V -277V	HR-3LED-R22D Non-IC	120V -277V
---	------------	-------------------------------	------------

REPLACEMENT MODULES

Reflectors

Narrow Flood Flood	SL-REF-BL10-1-N SL-REF-BL10-1-F
-----------------------	--

LED

2700K	85 CRI	BXRC-27E1000-B-03
2700K	90 CRI	BXRC-27G1000-B-03
3000K	85 CRI	BXRC-30E1000-B-03
3000K	90 CRI	BXRC-30G1000-B-03
3500K	85 CRI	BXRC-35E1000-B-03
4000K	85 CRI	BXRC-40E1000-B-03

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760