


HR3LEDT918P

3.5" Tesla™ Pro LED 30°-45° Adjustable Trim

WAC LIGHTING

Responsible Lighting®

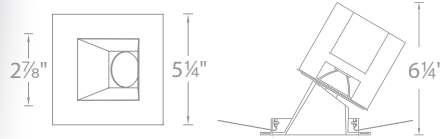

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minimum profile, square 30° to 45° adjustable trim with interior open reflector.

FEATURES

- 3.5" aperture
- Energy Star® rated (see below for list of models)
- Damp location listed
- 30° visual cutoff angle for glare control
- Ideal for sloped ceiling applications
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

Power Consumption: 21.5W


Dimming: 0-10V Dimming: 100%-10%
ELV Dimming: 100%-15% (120V only)

Mounting: Two heavy gauge retention clips hold trim firmly to housing.

Finish: Powder coated white
Electroplated brushed nickel and copper bronze

Standards: ETL & cETL Listed. See table below for Energy Star® qualifying products.

TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Energy Star®	Finish
HR3LEDT918P 30°-45° Adjustable	N 26°	827 2700K	85	1000	2537	Yes	BN Brushed Nickel CB Copper Bronze WT White 
		927 2700K	90	845	2177	No	
		830 3000K	85	1045	2665	Yes	
		930 3000K	90	950	2460	Yes	
		835 3500K	85	1135	2933	Yes	
		840 4000K	85	1150	2916	Yes	
	F 38°	827 2700K	85	955	1569	Yes	
		927 2700K	90	825	1351	No	
		830 3000K	85	1015	1662	Yes	
		930 3000K	90	925	1509	Yes	
		835 3500K	85	1090	1509	Yes	
		840 4000K	85	1115	1834	Yes	

HR3LEDT918P

Example: HR3LEDT918PF835CB

COMPATIBLE HOUSINGS *See individual housing spec sheets for complete information.*

New Construction

HR-3LED-H18D1-ICA <i>Narrow, IC-Rated, Airtight</i>	120V-277V	HR-3LED-H18D1-ICAC <i>Narrow, IC-Rated, Airtight Chicago Plenum</i>	120V-277V
HR-3LED-H18D-ICA <i>IC-Rated, Airtight</i>	120V-277V	HR-3LED-H18D-ICAC <i>IC-Rated, Airtight Chicago Plenum</i>	120V-277V
HR-3LED-H18D-EMICA <i>IC-Rated, Airtight Emergency Backup Battery</i>	120V	HR3LED-H18D-EMICAF <i>IC-Rated, Airtight Emergency Backup Battery</i>	277V

Remodel

HR-3LED-R22D <i>Non-IC</i>	120V-277V
--------------------------------------	-----------

REPLACEMENT MODULES

Reflectors

<i>Narrow Flood</i>	SL-REF-BL10-1-N
<i>Flood</i>	SL-REF-BL10-1-F

LED

2700K	85 CRI	BXRC-27E1000-B-03
2700K	90 CRI	BXRC-27G1000-B-03
3000K	85 CRI	BXRC-30E1000-B-03
3000K	90 CRI	BXRC-30G1000-B-03
3500K	85 CRI	BXRC-35E1000-B-03
4000K	85 CRI	BXRC-40E1000-B-03

waclighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760