

HAWK - model: WP-LED2

Endurance Wallpack

WAC LIGHTING


Responsible Lighting®

Fixture Type:

Catalog Number:

Project:

Location:

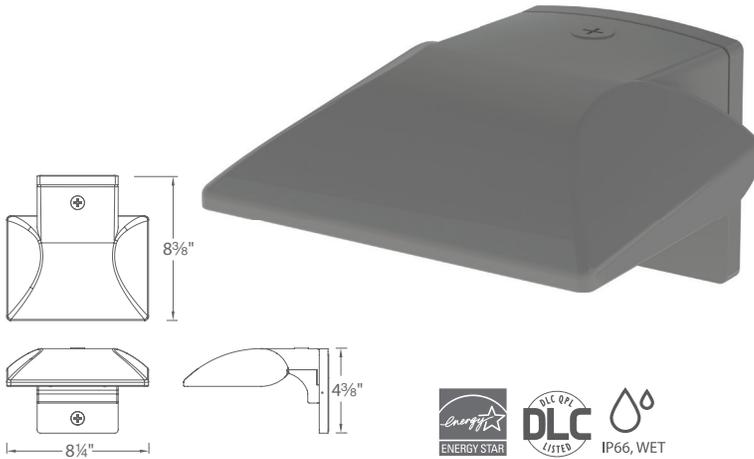

SPECIFICATIONS

Construction: Die-cast aluminum

Power: Integral driver in luminaire. Universal voltage input (120V-277V)

Dimming: 100% - 30% with 0 - 10V dimmer (120V - 277V)

100% - 15% with Electronic Low Voltage (ELV) dimmer (120V only)

Finish: Architectural Bronze, Graphite, and White

Standards: Energy Star®, DLC rated, IP66, Wet Location, ETL & cETL Listed

Total Harmonic Distortion: 35%

Operating Temperature: -40°C (-40°F) to 40°C (104°F)


PRODUCT DESCRIPTION

Die cast aluminum factory sealed housings with patent pending design for a water and dust proof IP66 rated outdoor luminaire


FEATURES

- Factory-Sealed LED Light Engine
- Die-Cast Aluminum Construction
- 20° Forward Throw Illumination
- Photo/Motion Sensor Compatible (Sold Separately)
- Built-in Level For Easy Adjustment
- Suitable to install in all directions
- Multi-Function Dimming: ELV (120V) or 0-10V
- 85 CRI
- 100,000 hour rated life

PHOTOMETRY

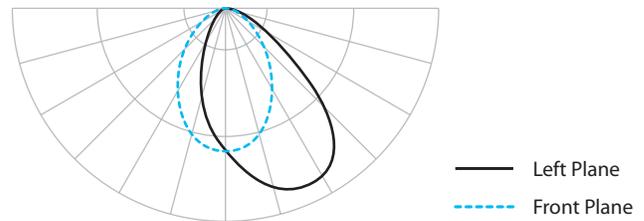

ORDER NUMBER

	Power	Comparable	Delivered Lumens		Color Temp		Finish			
			3000K	5000K	30	50				
	WP-LED219	19W	39W HID	1345	1435	30	3000K	aBZ	Architectural Bronze	
	WP-LED227	27W	70W HID	2050	2095		50	5000K	aGH	Architectural Graphite
								aWT	Architectural White	

- -

Example: **WP-LED219-30-GH**

ACCESSORIES



Motion Sensor
(120V)

MS-120-BZ	Bronze
MS-120-GY	Gray
MS-120-WT	White



Photo Sensor
(120V)

PC-120-BZ	Bronze
PC-120-GY	Gray
PC-120-WT	White

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585