


FLOOD - model: WP-LED3


Endurance Wallpack

WAC LIGHTING

Responsible Lighting®



Includes Two Canopy Accessories for Surface Mount or Recessed Junction Boxes






PRODUCT DESCRIPTION

Die cast aluminum factory sealed housings with patent pending design for a water and dust proof IP66 rated outdoor luminaire

FEATURES

- Factory-Sealed LED Light Engine
- 360° Horizontal Rotation, 90° Vertical Aiming
- Photo/Motion Sensor Compatible (Sold Separately)
- Suitable to install in all directions
- 120V Direct Wire - No Driver Needed
- Smooth and Continuous ELV Dimming
- 85 CRI
- 60,000 hour rated life


ORDER NUMBER

	Power	Comparable	Delivered Lumens		Color Temp		Finish	
			3000K	5000K	30	50	3000K	5000K
 WP-LED335	35W	100W HID	1945	2070	30	50	aBZ Architectural Bronze	
							aWT Architectural White	



Example: WP-LED336-30-BZ

ACCESSORIES



Motion Sensor
(120V)

MS-120-BZ Bronze
MS-120-GY Gray
MS-120-WT White



Photo Sensor
(120V)

PC-120-BZ Bronze
PC-120-GY Gray
PC-120-WT White

Fixture Type:

Catalog Number:


Project: _____

Location: _____

SPECIFICATIONS

- Construction:** Die-cast aluminum
- Power:** Line Voltage input (120V)
- Dimming:** 100% - 10% with Electronic Low Voltage (ELV) dimmer
- Finish:** Architectural Bronze, and White
- Standards:** Energy Star®, IP66, Wet Location, ETL & cETL Listed
- Operating Temperature:** -40°C (-40°F) to 40°C (104°F)

PHOTOMETRY

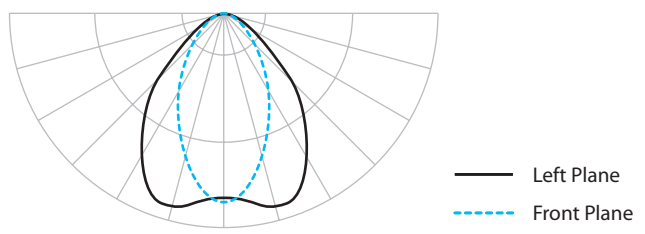

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585