


CUBE ARCHITECTURAL DC-WS06

WAC LIGHTING

LED Wall Mounts

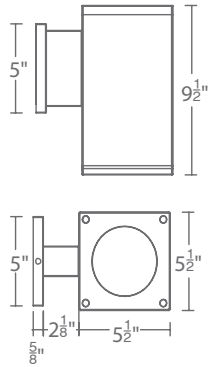

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

SPECIFICATIONS

Input: Universal voltage 120V - 277VAC, 50/60Hz
Dimming: Electronic low voltage (ELV) : 100% - 5%
 0-10V: 100% - 1%
Light Source: High output 3 Step Mac Adam Ellipse COB
 Rated life of 60,000 hours at L70
Finish: Electrostatically powder coated, white, black, bronze and graphite
Standards: IP65 rated, UL & cUL wet location listed, Energy Star® 2.2 rated Title 24 JA8-2016 Compliant
Operating Temp: -13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Reference output ¹	Efficacy	Light Distribution	Finish		
DC-WS06	6" 35W	S Straight up or down	16°	927S	2700K	90	2820	18842	81		BK Black WT White BZ Bronze GH Graphite
				827S	2700K	85	3385	22608	97		
				930S	3000K	90	2925	19543	84		
				830S	3000K	85	3535	23632	101		
				835S	3500K	85	3630	24255	104		
				840S	4000K	85	3665	24490	105		
		N Straight up or down	28°	927S	2700K	90	2800	7992	80		
				827S	2700K	85	3360	9589	96		
				930S	3000K	90	2900	8290	83		
				830S	3000K	85	3510	10024	100		
				835S	3500K	85	3600	10288	103		
				840S	4000K	85	3635	10388	104		
		F Straight up or down	38°	927S	2700K	90	2825	5451	81		
				827S	2700K	85	3390	6540	97		
				930S	3000K	90	2930	5654	84		
				830S	3000K	85	3545	6836	101		
				835S	3500K	85	3640	7017	104		
				840S	4000K	85	3675	7085	105		
F Away from the wall	N/A	927A	2700K	90	2860		82				
		827A	2700K	85	3435		98				
		930A	3000K	90	2970	N/A	85				
		830A	3000K	85	3590		103				
		835A	3500K	85	3685		105				
		840A	4000K	85	3720		106				
F Towards the wall	N/A	927B	2700K	90	2860		82				
		827B	2700K	85	3435		98				
		930B	3000K	90	2970	N/A	85				
		830B	3000K	85	3590		103				
		835B	3500K	85	3685		105				
		840B	4000K	85	3720		106				

DC-WS06- _____ - _____ ¹Reference output shows 35W output. Multiply by 0.7 to determine output for 22W combinations.

Example: **DC-WS06-F930A-WT**

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122


Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

CUBE ARCHITECTURAL DC-WE06

LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

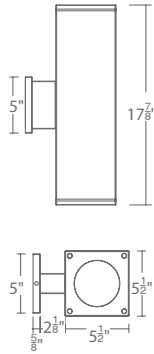

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- Single light extended body high performance exterior rated LED wall mount
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

SPECIFICATIONS

Input: Universal voltage 120V - 277VAC, 50/60Hz
Dimming: Electronic low voltage (ELV) : 100% - 5%
 0-10V: 100% - 1%
Light Source: High output 3 Step Mac Adam Ellipse COB
 Rated life of 60,000 hours at L70
Finish: Electrostatically powder coated, white, black, bronze and graphite
Standards: IP65 rated, UL & cUL wet location listed
 Energy Star® 2.2 rated Title 24 JA8-2016 Compliant
Operating Temp: -13°F to 122°F (-25°C to 50°C); EM: -4°F to 122°F (-20°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Reference Output ²	Efficacy (lm/w)	Light Distribution	Finish	
DC-WE06	35W	S Straight up or down	16°	927S	2700K	90	2820	18842	81		BK Black WT White BZ Bronze GH Graphite	
				827S	2700K	85	3385	22608	97			
				930S	3000K	90	2925	19543	84			
				830S	3000K	85	3535	23632	101			
				835S	3500K	85	3630	24255	104			
				840S	4000K	85	3665	24490	105			
	DC-WE06EM ¹	35W	N Straight up or down	28°	927S	2700K	90	2800	7992	80		
					827S	2700K	85	3360	9589	96		
					930S	3000K	90	2900	8290	83		
					830S	3000K	85	3510	10024	100		
					835S	3500K	85	3600	10288	103		
					840S	4000K	85	3635	10388	104		
	DC-WE0622	22W	F Straight up or down	38°	927S	2700K	90	2825	5451	81		
					827S	2700K	85	3390	6540	97		
					930S	3000K	90	2930	5654	84		
					830S	3000K	85	3545	6836	101		
					835S	3500K	85	3640	7017	104		
					840S	4000K	85	3675	7085	105		
DC-WE0622EM ¹	22W	F Away from the wall	N/A	927A	2700K	90	2860		82			
				827A	2700K	85	3435		98			
				930A	3000K	90	2970	N/A	85			
				830A	3000K	85	3590		103			
				835A	3500K	85	3685		105			
				840A	4000K	85	3720		106			
	DC-WE0622EM ¹	22W	F Towards the wall	N/A	927B	2700K	90	2860		82		
					827B	2700K	85	3435		98		
					930B	3000K	90	2970	N/A	85		
					830B	3000K	85	3590		103		
					835B	3500K	85	3685		105		
					840B	4000K	85	3720		106		

DC-WE06- _____ - _____ ¹EM fixtures provided with integral emergency battery back up. Provides at least 90 minutes of 5W illumination during emergency operation. Emergency test button and indicator light located in fixture mounting arm.

Example: **DC-WE06-F930A-WT** ²Reference output shows 35W output. Multiply by 0.7 to determine output for 22W combinations.

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760