


# Model: WL-LED200

## LEDme® Step Light

# WAC LIGHTING

Responsible Lighting®

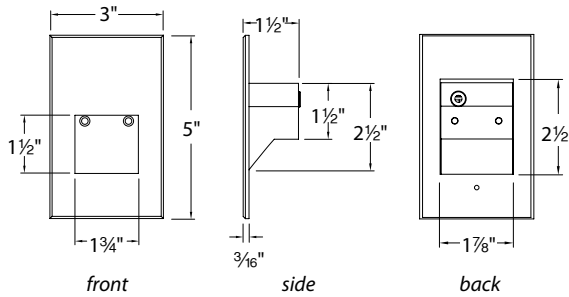

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

Vertical rectangle LEDme® Step Light. Designed for safety and style on stairways, patios, decks, balcony areas, walkways and building perimeters. Features an architectural design. Energy efficient for long-lasting indoor and outdoor lighting solutions. Creates an attractive, romantic impression at night.

### FEATURES

- 316 marine grade cast stainless steel (SS) available
- Direct wiring, no driver needed
- Low profile, flush to wall aesthetics with no visible hardware
- Turtle friendly (AM, RD colors)
- 40,000 hour rated life
- Balanced lighting, free of shadows with minimum glare
- Up to 200 fixtures can be connected in parallel
- Replaceable LED module
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

**Construction:** Die-cast aluminum or 316 marine grade cast stainless steel

**Power:** Direct wiring, no remote driver needed. Input voltage: 120V or 277V AC 50/60Hz

**Light Source:** 3000K CCT Samsung HV-AC High Power LED, CRI: 85  
Optional color lenses. Total power consumption of 3.9W

**Mounting:** Fits into 2" x 4" J-Box with minimum inside dimensions of 3" L x 2" W x 2" H

Includes bracket for J-Box mount. See next page for spacing recommendations

**Dimming:** Dim to 10% with electronic low voltage (ELV) dimmer  
Approved dimmers: Lutron Skylark SELV-300P-WH and Leviton Vizia VPE04

**Standards:** IP66, UL & cUL Listed for wet locations


### FIXTURE PERFORMANCE

Model #	Lm	Model #	Lm	Model #	Lm	Model #	Lm	Model #	Lm
WL-LED200-C-SS	36	WL-LED200-C-BK	27	WL-LED200-C-WT	63	WL-LED200-C-BN	27	WL-LED200-C-BZ	29
WL-LED200-AM-SS	21	WL-LED200-AM-BK	16	WL-LED200-AM-WT	31	WL-LED200-AM-BN	16	WL-LED200-AM-BZ	17
WL-LED200-RD-SS	2	WL-LED200-RD-BK	2	WL-LED200-RD-WT	4	WL-LED200-RD-BN	2	WL-LED200-RD-BZ	2
WL-LED200-BL-SS	4	WL-LED200-BL-BK	3	WL-LED200-BL-WT	7	WL-LED200-BL-BN	3	WL-LED200-BL-BZ	4
WL-LED200F-C-SS	33	WL-LED200F-C-BK	23	WL-LED200F-C-WT	54	WL-LED200F-C-BN	23	WL-LED200F-C-BZ	26
WL-LED200F-AM-SS	18	WL-LED200F-AM-BK	13	WL-LED200F-AM-WT	27	WL-LED200F-AM-BN	13	WL-LED200F-AM-BZ	14
WL-LED200F-RD-SS	2	WL-LED200F-RD-BK	1.5	WL-LED200F-RD-WT	3	WL-LED200F-RD-BN	1.5	WL-LED200F-RD-BZ	2
WL-LED200F-BL-SS	4	WL-LED200F-BL-BK	3	WL-LED200F-BL-WT	4	WL-LED200F-BL-BN	3	WL-LED200F-BL-BZ	3

### ORDER NUMBER

Model #	Color	Finish
WL-LED200 120V	C White 3000K	SS Stainless Steel
WL-LED200F 277V	AM Amber 610nm	BK Black
	RD Red 640nm	WT White
	BL Blue 450nm	BN Brushed Nickel
		BZ Bronze

### FINISHES



Example: WL-LED200F-AM-BZ

### WAC Lighting

www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585

### Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050  
Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760  
Phone (800) 526.2588 • Fax (800) 526.2585

# Model: WL-LED200


LEDme® Step Light

# WAC LIGHTING


Responsible Lighting®

## Spacing Recommendations for Optimal Light Distribution


### Corridors / Hallways

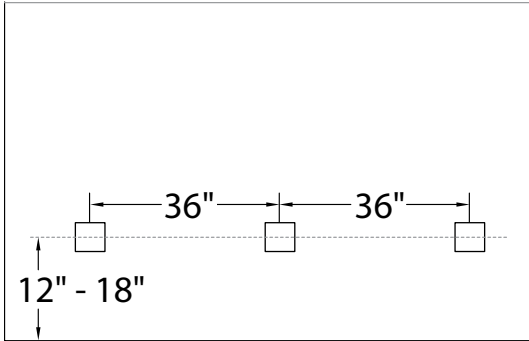

### Stairs - Wall Mount

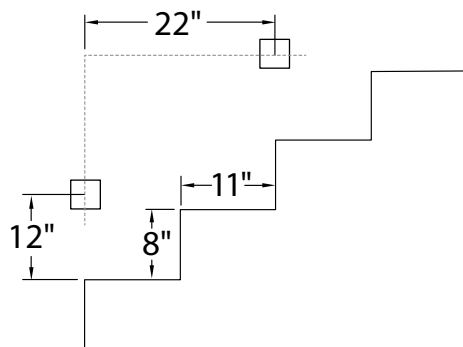

### Stairs - Step Mount

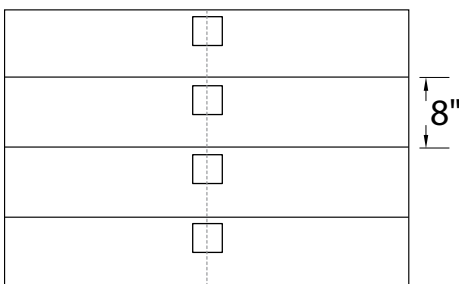

Mount in center of stair as close to the upper tread as possible.  
For best results use one light per step for steps narrower than 5'.