

# Lightology

lightology.com  
866-954-4489  
02-12-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EMR100958**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Fusion 24X28 Rectangle Lighted Mirror

By Electric Mirror



### Description


The Fusion Lighted Mirror is designed to maximize direct illumination. Ideal for precision tasks such as makeup application and shaving. White powder coated chassis for finished side view. Corrosion resistant OmegaMirror glass. Choice of standard forward phase control or with Ava dimming. Ava Smart Look technology features tunable white LED lights that allow you to select the color temperature. Select between 6500K for a day of outdoor activities, 4600K for your daily routine, or 2700K for a night out on the town. Tap to Cycle through 2700K, 4600K, 6500K, Night Glow and Off. At every level, hold to dim down to 10%. After one hour of non-use, Energy Save Mode automatically dims lights to 10%. Note: The Fusion mirror must be installed in the W x H (width x height) orientation as listed; it cannot be installed in any other direction.

### Specifications


COLOR . . . . . Mirror  
BODY FINISH . . . . . N/A  
WATTAGE . . . . . 41W  
DIMMER . . . . . Standard 120V  
DIMENSIONS . . . . . 24"W x 28"H x 1.75"D  
INTEGRATED LED MODULE . . . . . 1 x LED/41W/120-277V LED  
COUNTRY OF ORIGIN . . . . . United States

### Technical Information

COLOR RENDERING . . . . . 90 CRI  
LAMP COLOR . . . . . 3000K  
LUMENS/WATT . . . . . 130.10  
LUMINOUS FLUX . . . . . 5334 lumens

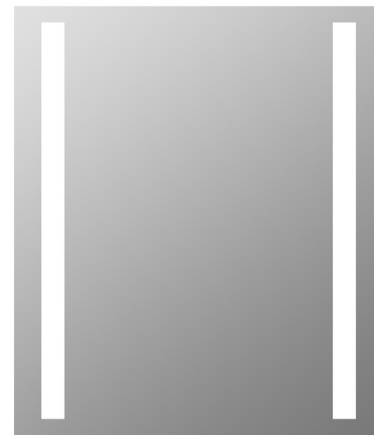

Shown in mirror

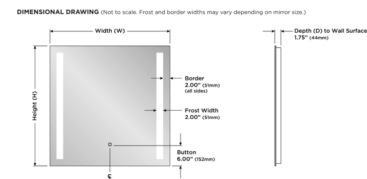

MODELS				
Base Model*	Model Type	Dimensions	Initial Lumens/Fixture	Power Requirements
FUS-2428	Standard	24" W x 28" H x 1.75" D	5,334	120-277VAC, 41W
FUS-2428-AK	With Aug**	(800mm W x 710mm H x 44mm D)	2,220	120 or 277VAC, 20W



CLICK TO VIEW PRODUCT

Notes: