

# Lightology

lightology.com  
866-954-4489  
07-04-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EMR100964**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Integrity Rectangle Lighted Mirror

By Electric Mirror



### Description

The Integrity Rectangle Lighted Mirror is designed to maximize direct illumination. Ideal for precision tasks such as makeup application and shaving. White powder coated chasis for finished side view. Available in a variety of sizes with standard or Ava control options. Standard control option allows for control with an on/off switch or forward phase dimming switch. Ava may be controlled by an external on/off light switch or with the Ava touch control located near the bottom of the mirror. Ava Smart Look technology features tunable white LED lights that allow you to select the color temperature. Select between 6500K for a day of outdoor activities, 4600K for your daily routine, or 2700K for a night out on the town. Tap to Cycle through 2700K, 4600K, 6500K, Night Glow and Off. At every level, hold to dim down to 10%. After one hour of non-use, Energy Save Mode automatically dims lights to 10%. Note: The Integrity mirror must be installed in the W x H (width x height) orientation as listed; it cannot be installed in any other direction.

### Specifications


COLOR . . . . . Mirror  
BODY FINISH . . . . . N/A  
WATTAGE . . . . . 103W  
DIMMER . . . . . Standard 120V  
DIMENSIONS . . . . . 36"W x 42"H x 1.75"D  
INTEGRATED LED MODULE . . . . . 1 x LED/103W/120-277V LED  
COUNTRY OF ORIGIN . . . . . United States

### Technical Information

COLOR RENDERING . . . . . 90 CRI  
LAMP COLOR . . . . . 3000K  
LUMENS/WATT . . . . . 130.50  
LUMINOUS FLUX . . . . . 13442 lumens



Shown in mirror

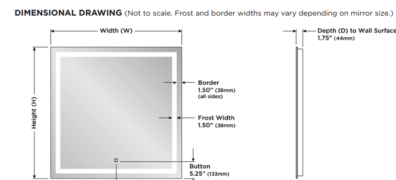

MODELS				
Base Model*	Model Type	Dimensions	Initial Lumens/Fixture	Power Requirements
INT-2436	Standard	24" W x 36" H x 1.75"D	9,605	120 or 277VAC, 100W
INT-2436-AK	With Ava*	(24.00mm W x 36.00mm H x 4.43mm D)	9,606	120 or 277VAC, 100W
INT-3042	Standard	30" W x 42" H x 1.75"D	12,862	120 or 277VAC, 100W
INT-3042-AK	With Ava*	(30.00mm W x 42.00mm H x 4.43mm D)	12,862	120 or 277VAC, 100W
INT-3636	Standard	36" W x 36" H x 1.75"D	12,862	120 or 277VAC, 100W
INT-3636-AK	With Ava*	(36.00mm W x 36.00mm H x 4.43mm D)	12,862	120 or 277VAC, 100W
INT-3642	Standard	36" W x 42" H x 1.75"D	15,442	120 or 277VAC, 100W
INT-3642-AK	With Ava*	(36.00mm W x 42.00mm H x 4.43mm D)	15,442	120 or 277VAC, 100W
INT-4236	Standard	42" W x 36" H x 1.75"D	15,442	120 or 277VAC, 100W
INT-4236-AK	With Ava*	(42.00mm W x 36.00mm H x 4.43mm D)	15,442	120 or 277VAC, 100W
INT-4242	Standard	42" W x 42" H x 1.75"D	18,722	120 or 277VAC, 100W
INT-4242-AK	With Ava*	(42.00mm W x 42.00mm H x 4.43mm D)	18,722	120 or 277VAC, 100W
INT-4836	Standard	48" W x 36" H x 1.75"D	18,722	120 or 277VAC, 100W
INT-4836-AK	With Ava*	(48.00mm W x 36.00mm H x 4.43mm D)	18,722	120 or 277VAC, 100W
INT-5442	Standard	54" W x 42" H x 1.75"D	22,862	120 or 277VAC, 100W
INT-5442-AK	With Ava*	(54.00mm W x 42.00mm H x 4.43mm D)	22,862	120 or 277VAC, 100W
INT-6036	Standard	60" W x 36" H x 1.75"D	22,862	120 or 277VAC, 100W
INT-6036-AK	With Ava*	(60.00mm W x 36.00mm H x 4.43mm D)	22,862	120 or 277VAC, 100W
INT-6642	Standard	66" W x 42" H x 1.75"D	29,842	120 or 277VAC, 100W
INT-6642-AK	With Ava*	(66.00mm W x 42.00mm H x 4.43mm D)	29,842	120 or 277VAC, 100W
INT-7242	Standard	72" W x 42" H x 1.75"D	37,822	120 or 277VAC, 100W
INT-7242-AK	With Ava*	(72.00mm W x 42.00mm H x 4.43mm D)	37,822	120 or 277VAC, 100W



CLICK TO VIEW PRODUCT

Notes: