

Lightology

lightology.com
866-954-4489
04-25-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG1010155**
 Approved On: _____ Approved By: _____

MIYO Cirrus Triangle Suspension with Center Feed Power

By PureEdge Lighting



Description


Cirrus MIYO (Make-It-Your-Own) Triangle LED Pendant with center feed features a trio of linear channels creating a geometric form. Available in 24 or 36 inch options with 5 watts per foot. Finishes in Satin Black, Chrome or Satin Nickel with matching canopy, or Satin Brass with a Black canopy. Diffused flat standard or high efficiency lens with a 100 degree beam spread. Includes a round canopy (canopy size dependent on fixture size) with a Universal (UNI) power supply inside canopy. Universal dimming (TRIAC, ELV, 0-10V), sold separately. 10 foot adjustable suspension cables. Product is built to order.

Specifications


COLOR Diffused Lens
 BODY FINISH Satin Brass
 WATTAGE 15W
 DIMMER Low Voltage Electronic
 DIMENSIONS 36"L x 0.9"W x 0.9"H
 INTEGRATED LED MODULE 3 x LED/5W/120-277V LED

Technical Information

LAMP LIFE 50000 hours
 LAMP COLOR 2700K
 LUMENS/WATT 438.40
 LUMINOUS FLUX 2192 lumens

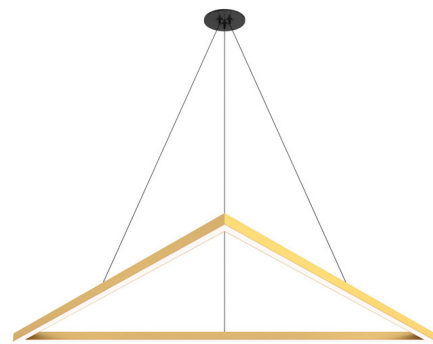

Shown in satin brass / diffused lens



LENGTH CHART Actual Lengths for Cirrus MIYO Triangle with L2 Canopy, Satin White & Warm Dim

Mounting Height (ft)	Dim A (Inches)	Dim B (Inches)	Total Length (ft)	Canopy (ft)	Total Length (ft)	Total Length (ft)
1	1.11	1.22	1.1	0.1	1.2	1.2
1.5	1.50	1.61	1.5	0.1	1.6	1.6
2	1.89	2.00	2.0	0.1	2.1	2.1
2.5	2.28	2.39	2.5	0.1	2.6	2.6
3	2.67	2.78	3.0	0.1	3.1	3.1
3.5	3.06	3.17	3.5	0.1	3.6	3.6
4	3.45	3.56	4.0	0.1	4.1	4.1
4.5	3.84	3.95	4.5	0.1	4.6	4.6
5	4.23	4.34	5.0	0.1	5.1	5.1
5.5	4.62	4.73	5.5	0.1	5.6	5.6
6	5.01	5.12	6.0	0.1	6.1	6.1
6.5	5.40	5.51	6.5	0.1	6.6	6.6
7	5.79	5.90	7.0	0.1	7.1	7.1
7.5	6.18	6.29	7.5	0.1	7.6	7.6
8	6.57	6.68	8.0	0.1	8.1	8.1
8.5	6.96	7.07	8.5	0.1	8.6	8.6
9	7.35	7.46	9.0	0.1	9.1	9.1
9.5	7.74	7.85	9.5	0.1	9.6	9.6
10	8.13	8.24	10.0	0.1	10.1	10.1
10.5	8.52	8.63	10.5	0.1	10.6	10.6
11	8.91	9.02	11.0	0.1	11.1	11.1
11.5	9.30	9.41	11.5	0.1	11.6	11.6
12	9.69	9.80	12.0	0.1	12.1	12.1
12.5	10.08	10.19	12.5	0.1	12.6	12.6
13	10.47	10.58	13.0	0.1	13.1	13.1
13.5	10.86	10.97	13.5	0.1	13.6	13.6
14	11.25	11.36	14.0	0.1	14.1	14.1
14.5	11.64	11.75	14.5	0.1	14.6	14.6
15	12.03	12.14	15.0	0.1	15.1	15.1
15.5	12.42	12.53	15.5	0.1	15.6	15.6
16	12.81	12.92	16.0	0.1	16.1	16.1
16.5	13.20	13.31	16.5	0.1	16.6	16.6
17	13.59	13.70	17.0	0.1	17.1	17.1
17.5	13.98	14.09	17.5	0.1	17.6	17.6
18	14.37	14.48	18.0	0.1	18.1	18.1
18.5	14.76	14.87	18.5	0.1	18.6	18.6
19	15.15	15.26	19.0	0.1	19.1	19.1
19.5	15.54	15.65	19.5	0.1	19.6	19.6
20	15.93	16.04	20.0	0.1	20.1	20.1



CLICK TO VIEW PRODUCT

Notes: _____