

# Lightology

lightology.com  
866-954-4489  
02-13-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1010155**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_


## MIYO Cirrus Triangle Suspension with Center Feed Power

By PureEdge Lighting




### Description

Cirrus MIYO (Make-It-Your-Own) Triangle LED Pendant with center feed features a trio of linear channels creating a geometric form. Available in 24 or 36 inch options with 5 watts per foot. Finishes in Satin Black, Chrome or Satin Nickel with matching canopy, or Satin Brass with a Black canopy. Diffused flat standard or high efficiency lens with a 100 degree beam spread. Includes a round canopy (canopy size dependent on fixture size) with a Universal (UNI) power supply inside canopy. Universal dimming (TRIAC, ELV, 0-10V), sold separately. 10 foot adjustable suspension cables. Product is built to order.

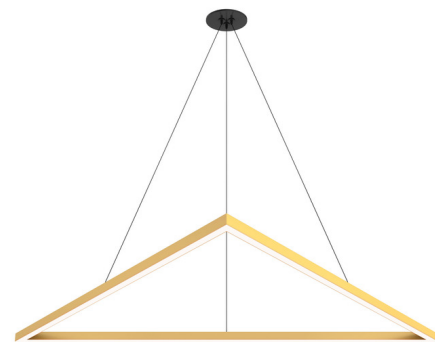

Shown in satin brass / diffused lens

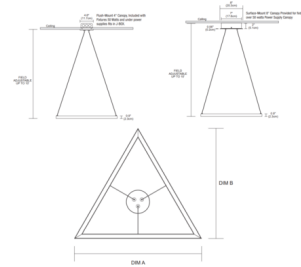

**LENGTH CHART** Actual Lengths for Cirrus MIYO Triangle with L2 Canopy, Satin White & Warm Dim

Horizontal Length (Feet)	Base & Canopy (Inches)	Base & Canopy (Feet)	Linear Channel (Feet)	Channel (Inches)	Channel (Feet)	Total Length (Feet)	Total Length (Inches)	Channel (Feet)	Total Length (Inches)
2	1.125	1.125	1.75	18	1.5625	2.875	34.5	2.5	31.0
4	1.125	1.125	3.5	18	1.5625	4.6875	56.5	2.5	54.0
6	1.125	1.125	5.25	18	1.5625	6.5	78.5	2.5	76.0
8	1.125	1.125	7.0	18	1.5625	8.3125	100.5	2.5	98.0
10	1.125	1.125	8.75	18	1.5625	10.125	122.5	2.5	120.0
12	1.125	1.125	10.5	18	1.5625	11.9375	144.5	2.5	142.0
14	1.125	1.125	12.25	18	1.5625	13.75	166.5	2.5	164.0
16	1.125	1.125	14.0	18	1.5625	15.5625	188.5	2.5	186.0
18	1.125	1.125	15.75	18	1.5625	17.375	210.5	2.5	208.0
20	1.125	1.125	17.5	18	1.5625	19.1875	232.5	2.5	230.0
22	1.125	1.125	19.25	18	1.5625	21.0	254.5	2.5	252.0
24	1.125	1.125	21.0	18	1.5625	22.8125	276.5	2.5	274.0
26	1.125	1.125	22.75	18	1.5625	24.625	298.5	2.5	296.0
28	1.125	1.125	24.5	18	1.5625	26.4375	320.5	2.5	318.0
30	1.125	1.125	26.25	18	1.5625	28.25	342.5	2.5	340.0
32	1.125	1.125	28.0	18	1.5625	30.0625	364.5	2.5	362.0
34	1.125	1.125	29.75	18	1.5625	31.875	386.5	2.5	384.0
36	1.125	1.125	31.5	18	1.5625	33.6875	408.5	2.5	406.0
38	1.125	1.125	33.25	18	1.5625	35.5	430.5	2.5	428.0
40	1.125	1.125	35.0	18	1.5625	37.3125	452.5	2.5	450.0
42	1.125	1.125	36.75	18	1.5625	39.125	474.5	2.5	472.0
44	1.125	1.125	38.5	18	1.5625	40.9375	496.5	2.5	494.0
46	1.125	1.125	40.25	18	1.5625	42.75	518.5	2.5	516.0

### Specifications

COLOR . . . . . Diffused Lens  
BODY FINISH . . . . . Satin Brass  
WATTAGE . . . . . 15W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 36"L x 0.9"W x 0.9"H  
INTEGRATED LED MODULE . . . . . 3 x LED/5W/120-277V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 438.40  
LUMINOUS FLUX . . . . . 2192 lumens



CLICK TO VIEW PRODUCT

Notes: