

# Lightology

lightology.com  
866-954-4489  
04-25-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG1010350**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## MIYO Cirrus Pix Sticks Suspension with Remote Power By PureEdge Lighting



### Description

Cirrus Pix Sticks MIYO (Make-It-Your-Own) Chandelier pairs the clean, architectural aesthetic of our Cirrus family of fixtures and artfully suspends them from a single canopy, creating visually intriguing compositions of form, function and style. Easily fine-tune the angles and alternate heights to create a cascade of illumination. Mix and match lengths or keep them all the same. Configurations in 2, 3, 4, 5, 6, 7 and 9-light compositions. Available in standard increments from 39 to 96 inch with 5 or 7 watts per foot. Finishes in Satin Black, Chrome, Satin Nickel with a D1 diffused white direct lens. Offered in color temperatures ranging from 2200K to 5700K. Includes 12 foot adjustable suspension cables. Product is built to order. NOTE: CHANDELIER REQUIRES A CANOPY (AVAILABLE IN 4 TO 18 PORT), DESIRED CHANNEL LENGTHS, AND A 24VDC REMOTE UNIVERSAL (UNI) OR LUTRON HI-LUME POWER SUPPLY, SOLD SEPARATELY. Image shown in a 5-light composition with a 10-port canopy and mixed channel lengths.

### Specifications



COLOR . . . . . Diffused Lens  
 BODY FINISH . . . . . Satin Nickel  
 WATTAGE . . . . . 15W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 39"L x 0.9"W x 0.9"H  
 INTEGRATED LED MODULE . . . . . 3 x LED/5W/120-277V LED

### Technical Information

PRODUCT DIMENSIONS . . . . . Cable Length: 12 Feet  
 LAMP LIFE . . . . . 50000 hours  
 LAMP COLOR . . . . . 2700K  
 LUMENS/WATT . . . . . 178.80  
 LUMINOUS FLUX . . . . . 894 lumens



Shown in satin nickel / diffused lens

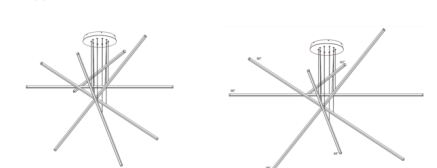

**UNIFORM CHANNEL LENGTHS**  
 Ordering Code:  
 1 X CS25-1200-109-0N  
 5 X CS25-SW-GB210-72-30K-0N  
 Wattage for power supply:  
 27(12) x 0.5 x 4.0W = 26.0W x 5 = 132 watts  
 Remote Power supply ordering code:  
 PSB-2006-UNI-24VDC

**MIXED CHANNEL LENGTHS**  
 Ordering Code:  
 1 X CS25-1200-109-0N  
 1 X CS25-SW-GB210-48-30K-0N  
 1 X CS25-SW-GB210-60-30K-0N  
 3 X CS25-SW-GB210-96-30K-0N  
 Wattage for power supply:  
 48(12) x 0.4 x 4W = 23.0W  
 60(12) x 0.4 x 4W = 28.8W x 3 = 105.6 watts  
 Total: 148.2W  
 Remote Power supply ordering code:  
 PSB-2006-UNI-24VDC



CLICK TO VIEW PRODUCT

Notes: