

# Lightology

lightology.com  
866-954-4489  
05-20-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **LPL1011019**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Flindt 24V Outdoor Bollard

By Louis Poulsen



### Description

The Flindt 24V Outdoor Bollard emits a wide, downward directed, glare-free light. The light source rests at the top inside the asymmetric carving on the side of the bollard, where the gradient serves as a reflector that softens the light and forms a pleasant organic shape on the ground below. A horizontal connection line underline the two parts of the bollard. Mounting options include: Spike Mount for use in soil or gravel. Spike mount bollards come pre-wired with a weatherproof 12 inch connector cable for above-ground use. Anchor Mounts are designed for use in new concrete pads and require professional below-ground cabling. Baseplate Mounts include a baseplate for securing the bollard to existing concrete or decks and are designed for use with professional below-ground cabling. Anchor and Baseplate fixtures include inputs for professional cabling. Note: Required power supply sold separately. T-connector included with Spike mount options. Optional extension cable available for Spike mount options.

### Specifications


COLOR	N/A
BODY FINISH	Natural Aluminum
WATTAGE	7W
DIMMER	Not Dimmable
DIMENSIONS	2"W x 13.8"H
INTEGRATED LED MODULE	1 x LED/7W/24V LED

### Technical Information

COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	36.00
LUMINOUS FLUX	252 lumens



Shown in natural aluminum

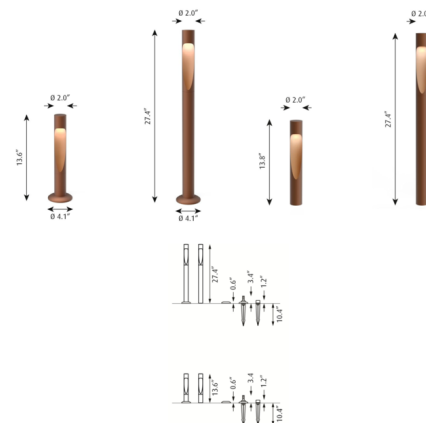

CLICK TO VIEW PRODUCT

Notes: