

Lightology

lightology.com
866-954-4489
04-04-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **LPL1011019**
 Approved On: _____ Approved By: _____

Flindt 24V Outdoor Bollard

By Louis Poulsen



Description

The Flindt 24V Outdoor Bollard emits a wide, downward directed, glare-free light. The light source rests at the top inside the asymmetric carving on the side of the bollard, where the gradient serves as a reflector that softens the light and forms a pleasant organic shape on the ground below. A horizontal connection line underline the two parts of the bollard. Mounting options include: Spike Mount for use in soil or gravel. Spike mount bollards come pre-wired with a weatherproof 12 inch connector cable for above-ground use. Anchor Mounts are designed for use in new concrete pads and require professional below-ground cabling. Baseplate Mounts include a baseplate for securing the bollard to existing concrete or decks and are designed for use with professional below-ground cabling. Anchor and Baseplate fixtures include inputs for professional cabling. Note: Required power supply sold separately. T-connector included with Spike mount options. Optional extension cable available for Spike mount options.

Specifications


COLOR	N/A
BODY FINISH	Natural Aluminum
WATTAGE	7W
DIMMER	Not Dimmable
DIMENSIONS	2" W x 13.8" H
INTEGRATED LED MODULE	1 x LED/7W/24V LED

Technical Information

COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	36.00
LUMINOUS FLUX	252 lumens



Shown in natural aluminum

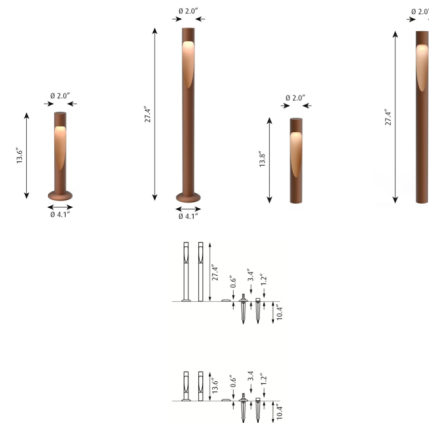

CLICK TO VIEW PRODUCT

Notes: