

lightology.com  
866-954-4489  
07-02-25

Project: \_\_\_\_\_

Company: \_\_\_\_\_

Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

SPEC #: LPL1011019

Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Flindt 24V Outdoor Bollard

By Louis Poulsen



### Description

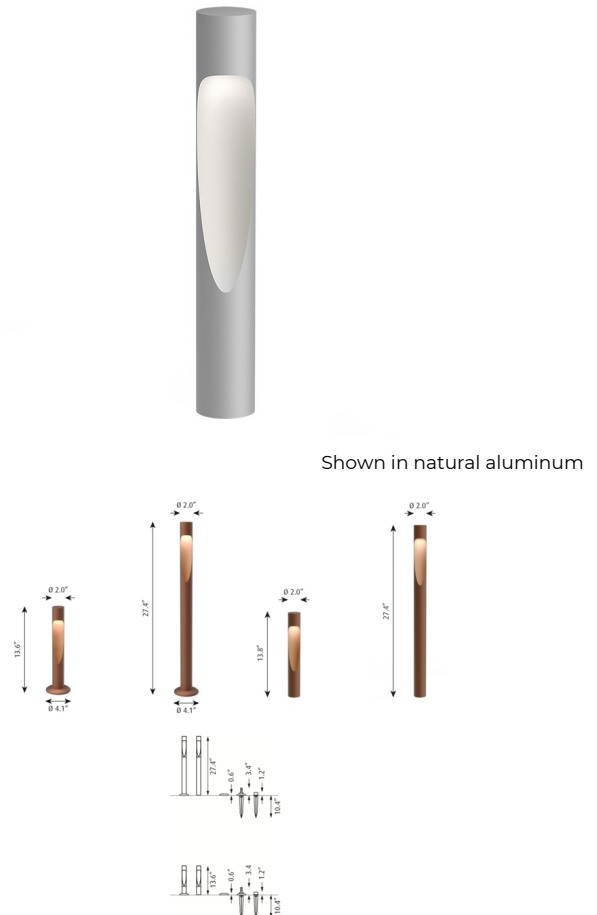
The Flindt 24V Outdoor Bollard emits a wide, downward directed, glare-free light. The light source rests at the top inside the asymmetric carving on the side of the bollard, where the gradient serves as a reflector that softens the light and forms a pleasant organic shape on the ground below. A horizontal connection line underline the two parts of the bollard. Mounting options include: Spike Mount for use in soil or gravel. Spike mount bollards come pre-wired with a weatherproof 12 inch connector cable for above-ground use. Anchor Mounts are designed for use in new concrete pads and require professional below-ground cabling. Baseplate Mounts include a baseplate for securing the bollard to existing concrete or decks and are designed for use with professional below-ground cabling. Anchor and Baseplate fixtures include inputs for professional cabling. Note: Required power supply sold separately. T-connector included with Spike mount options. Optional extension cable available for Spike mount options.

## Specifications

COLOR	N/A
BODY FINISH	Natural Aluminum
WATTAGE	7W
DIMMER	Not Dimmable
DIMENSIONS	2"W x 13.8"H
INTEGRATED LED MODULE	1 x LED/7W/24V LED

## Technical Information

COLOR RENDERING . . . . .	90 CRI
LAMP COLOR . . . . .	2700K
LUMENS/WATT . . . . .	36.00
LUMINOUS FLUX . . . . .	252 lumens

[CLICK TO VIEW PRODUCT](#)

Notes: