



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

### DESCRIPTION

Reveal Wall Wash 2 is a 24VDC linear LED system that washes the wall from the very top of the ceiling to the floor. Features a shallow, plaster-in aluminum extrusion no thicker than drywall. Position the Reveal 24 inches away from the projected wall, position the LED strip within the channel, connect to a low voltage power supply, then plaster over the edges and paint to match surrounding surface. Finish available in Satin Aluminum or White. Available in 5, 7 or 10 watts per foot in a variety of color temperature options. Sold in 1 foot increments up to 20 feet and may be field-cut to any length. System requires a Universal (UNI) power supply, sold separately. Includes a 5 year pro-rated warranty. ETL listed. Suitable for damp locations. Title 24 compliant when used with a Universal (UNI) power supply. Product is built to order. 5 WATT OPTION AVAILABLE UP TO 20 FEET 7 WATT OPTION AVAILABLE UP TO 12 FEET 10 WATT OPTION AVAILABLE UP TO 10 FEET System includes junction box, adjustable mounting bars, Reveal Wall Wash channel(s), power feed end cap, junction box cover, dead end cap, take-up box, drywall screws, LED Soft Strip, and lens(es). Order additional Junction Box (RVWW2-1RE-JBOX) separately to rough-in electrical wiring before drywall installation, sold separately. Required power supply and dimmer control sold separately.




SHADE COLOR	N/A
BODY FINISH	Satin Aluminum
WATTAGE	5W
DIMMER	Dimmable
DIMENSIONS	12"L x 3.57"W x 0.625"H
INTEGRATED LED MODULE	
LAMP	1 x LED/5W/24V LED

#### Technical Information

LUMINOUS FLUX	210 lumens
LUMENS/WATT	42.00
LAMP COLOR	2700K

SPEC #

EDG1024256

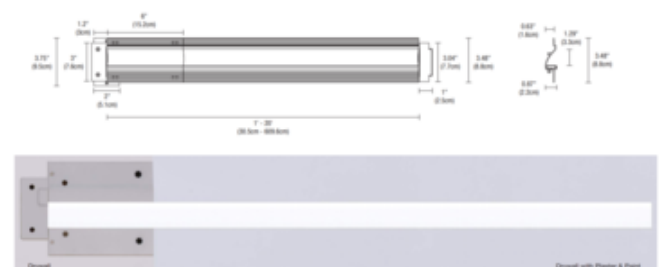

#### INCLUDED COMPONENTS

- JUNCTION BOX**  
Includes Junction Box with Adjustable Mounting Bar and includes a Reveal template for accurate installation. Low Voltage (24VDC) wires from Reveal Power Supply connect to 24V wires inside box. Junction Box opening is connected with the Reveal Wall Wash Junction Box cover and is required at the beginning of each run.
- ADJUSTABLE MOUNTING BARS**  
Provides flexibility for mounting in a variety of spaces.
- REVEAL WALL WASH CHANNELS**  
24\"/>
- POWER FEED END CAP**  
Provides a connection area for 24VDC wires at beginning of run where LED Soft Strip wires connect.
- JUNCTION BOX COVER**  
Covers Junction Box opening. Required at the beginning of each run.
- DEAD END CAP PLATE**  
Provides a finished look and prevents light leak at end of run where LED Soft Strip ends channel.
- TAKE-UP BOX**  
Provides clean looks at end of run by holding excess LED Soft Strip safely behind wall.
- DRYWALL SCREWS**  
Secure channel to channel and mounts.
- LED SOFT STRIP**  
Black Box shows Designer Grade High CRI 90+ LED Soft Strip. See demo video for additional details.
- LENS**  
0.125\"/>

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE