



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

The Flex Neon LRF7 with a 0.7 inch wide flat lens bends left or right and features E (end power input wire), CA (cap at end, no feed through), and W (outdoor wet location barrel connector cable leads). May be surface or flush mounted. Choose from a variety of static white color temperature options including Warm Dim 27D (2700K-2000K) or 30D (3000K-2000K). Sold in 5 foot increments at 5 watts (4.4 watts) per foot up to 20 feet. IP65 rated for outdoor wet locations. System includes Outdoor 24VDC LED Flex Neon, End Cap, Power Connector (connected to each end of fixture), Wet Location Barrel Connectors, and Mounting Clips (provided with every two feet of Flex Neon). Optional mounting accessories sold separately. System requires an outdoor rated Universal power supply and outdoor power supply enclosure (dimmable ELV/TRIAC/0-10V), sold separately. Note: Product is built to order.



Shown in: White


| | |
|-----------------------|------------------------|
| SHADE COLOR | White |
| BODY FINISH | N/A |
| WATTAGE | 25W |
| DIMMER | Low Voltage Electronic |
| DIMENSIONS | 60"L x 0.7"W x 0.75"H |
| INTEGRATED LED MODULE | |
| LAMP | 5 x LED/5W/24V LED |

Technical Information

| | |
|-----------------|-------------|
| LUMINOUS FLUX | 1425 lumens |
| LUMENS/WATT | 285.00 |
| LAMP COLOR | 2700K |
| COLOR RENDERING | 92 CRI |
| BEAM ANGLE | 120° |

SPEC #

EDG1027551

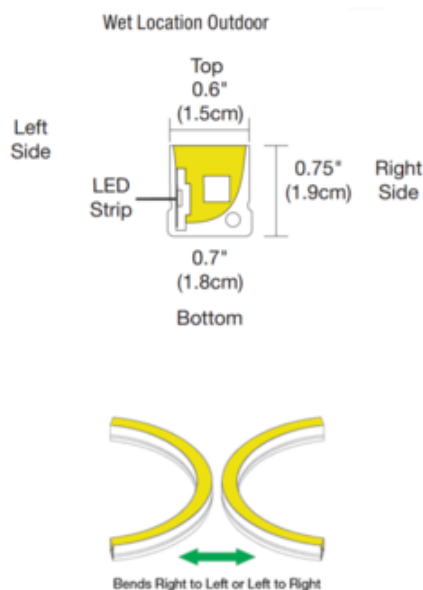

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE