



### BRAND

PureEdge Lighting

### DESCRIPTION

The Flex Neon LRF7 with a 0.7 inch wide flat lens bends left or right and features E (end power input wire), CA (cap at end, no feed through), and W (outdoor wet location barrel connector cable leads). May be surface or flush mounted. Choose from a variety of static white color temperature options including Warm Dim 27D (2700K-2000K). Sold in 5 foot increments at 5 watts (4.4 watts) per foot up to 20 feet. IP65 rated for outdoor wet locations. System includes Outdoor 24VDC LED Flex Neon, End Cap, Power Connector (connected to each end of fixture), Wet Location Barrel Connectors, and Mounting Clips (provided with every two feet of Flex Neon). Optional mounting accessories sold separately. System requires an outdoor rated Universal power supply and outdoor power supply enclosure (dimmable ELV/ TRIAC/0-10V), sold separately. Note: Product is built to order.





SHADE COLOR	White
BODY FINISH	N/A
WATTAGE	100W
DIMMER	Low Voltage Electronic
DIMENSIONS	240"L x 0.7"W x 0.75"H
INTEGRATED LED MODULE	
LAMP	20 x LED/24V LED

#### Technical Information

LUMINOUS FLUX	7800 lumens
LUMENS/WATT	1,560.00
LAMP COLOR	3000K Warm Dim
COLOR RENDERING	92 CRI
BEAM ANGLE	120°

SPEC #

EDG1027576

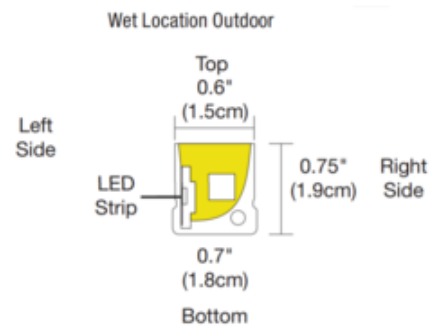

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE