

# Lightology

lightology.com  
866-954-4489  
02-13-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1027579**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Flex Neon UDF7 Indoor/Outdoor Static White Up/Down Bend By PureEdge Lighting



### Description

The Flex Neon Outdoor UDF7 with a 0.7 inch wide flat lens bends up or down and features E (end power input wire), CA (cap at end, no feed through), and W (outdoor wet location barrel connector cable leads). May be surface or flush mounted. Choose from a variety of color temperature options including Warm Dim 27D (2700K-2000K). Sold in 5 foot increments up to 20 feet (5W). Universal power supply dimmable with an electronic low voltage (ELV), Triac, or 0-10V dimmer, sold separately. ETL listed. 5-year pro-rated warranty. IP65 rated for outdoor wet locations. Product is built to order. System includes Outdoor 24VDC LED Flex Neon, End Cap, Power Connector (connected to each end of fixture), Wet Location Barrel Connectors, and Mounting Clips (provided with every two feet of Flex Neon). System requires Outdoor Rated Power Supply and Outdoor Power Supply Enclosure. Optional mounting accessories sold separately.

### Specifications


COLOR . . . . . White  
BODY FINISH . . . . . N/A  
WATTAGE . . . . . 25W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 60"L x 0.7"W x 0.5"H  
INTEGRATED LED MODULE . . . . . 5 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
BEAM ANGLE . . . . . 120°  
COLOR RENDERING . . . . . 93 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 321.00  
LUMINOUS FLUX . . . . . 1605 lumens



Shown in white

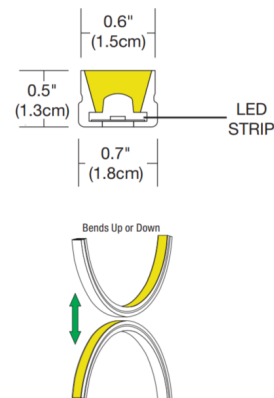

CLICK TO VIEW PRODUCT

Notes: