



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

The Flex Neon Outdoor UDF7 with a 0.7 inch wide flat lens bends up or down and features E (end power input wire), CA (cap at end, no feed through), and W (outdoor wet location barrel connector cable leads). May be surface or flush mounted. Choose from a variety of color temperature options including Warm Dim 27D (2700K-2000K) or 30D (3000K-2000K). Sold in 5 foot increments up to 20 feet (5W). Universal power supply dimmable with an electronic low voltage (ELV), Triac, or 0-10V dimmer, sold separately. ETL listed. 5-year pro-rated warranty. IP65 rated for outdoor wet locations. Product is built to order. System includes Outdoor 24VDC LED Flex Neon, End Cap, Power Connector (connected to each end of fixture), Wet Location Barrel Connectors, and Mounting Clips (provided with every two feet of Flex Neon). System requires Outdoor Rated Power Supply and Outdoor Power Supply Enclosure. Optional mounting accessories sold separately.




Shown in: White

SHADE COLOR	White
BODY FINISH	N/A
WATTAGE	25W
DIMMER	Low Voltage Electronic
DIMENSIONS	60"L x 0.7"W x 0.5"H
INTEGRATED LED MODULE	
LAMP	5 x LED/5W/24V LED

Technical Information

LUMINOUS FLUX	1605 lumens
LUMENS/WATT	321.00
LAMP COLOR	2700K
COLOR RENDERING	93 CRI
BEAM ANGLE	120°

SPEC # EDG1027579

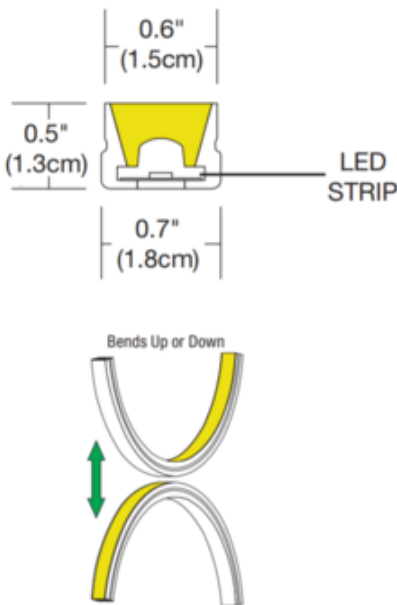

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE