



BRAND

PureEdge Lighting

DESCRIPTION

LRT7 Flexible Neon Bends Left to Right with a 0.7 inch wide three-sided lens, offering superior color quality and performance while creating uniform illumination without visible dots. Flex Neon can be flush or surface mounted. Sold in 5 foot increments at 5 watts (4.4 watts) per foot up to 20 feet. Dynamic Tunable White (2K6K) color temperature option ranges from 2000K through 6500K (daylight). Tunable White allows for independent control for adjusting LED color temperature and brightness. IP65 rated for outdoor wet locations. System includes Outdoor 24VDC LED Flex Neon, End Cap, Power Connector (connected to each end of fixture), Wet Location Barrel Connectors, and Mounting Clips (provided with every two feet of Flex Neon). Optional mounting accessories and dimmer control sold separately. System requires an outdoor rated 24VDC Tunable White power supply with outdoor power supply enclosure, or 0-10V 2-channel Tunable White power supply, sold separately. 0-10V Dimming: Requires two dimmers, one for intensity and one for color temperature. DMX Dynamic Color Changing: Requires CDMX1 controller. Note: Product is built to order





SHADE COLOR	White
BODY FINISH	N/A
WATTAGE	25W
DIMMER	N/A
DIMENSIONS	60"L x 0.7"W x 0.75"H
INTEGRATED LED MODULE	
LAMP	5 x LED/5W/24V LED

Technical Information

LUMINOUS FLUX	1440 lumens
LUMENS/WATT	288.00
LAMP COLOR	2000K-4000K Tunable White
COLOR RENDERING	93 CRI
BEAM ANGLE	120°

SPEC # EDG1027612

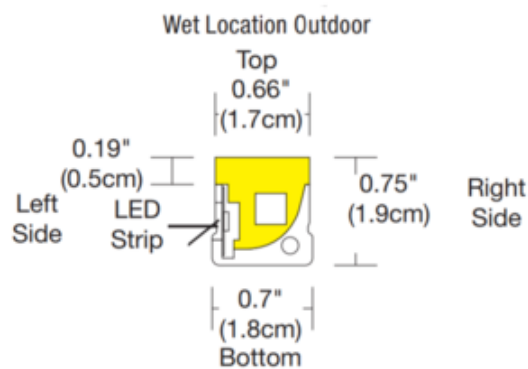

Bends Right to Left or Left to Right

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE